ARCHITECTURAL

LIGHTING

2025

SLIGHTLY DIFFERENT

ARCHITECTURAL

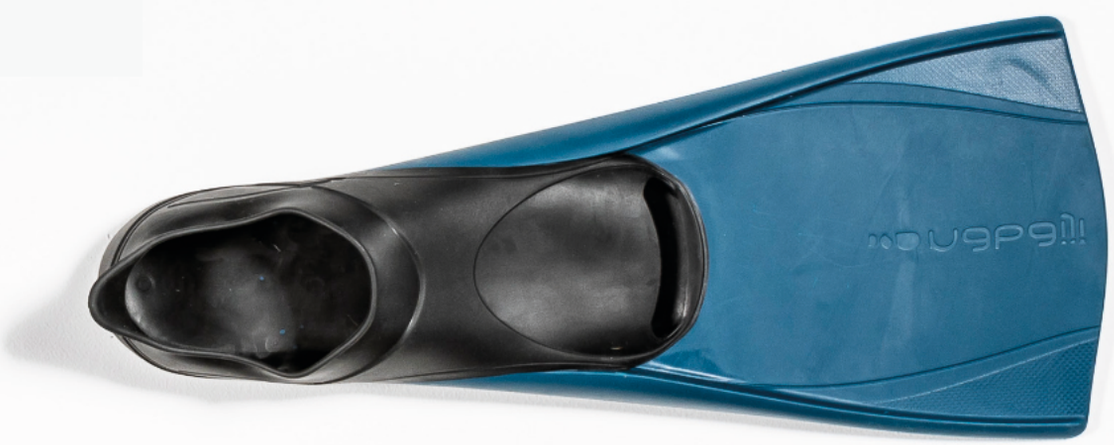

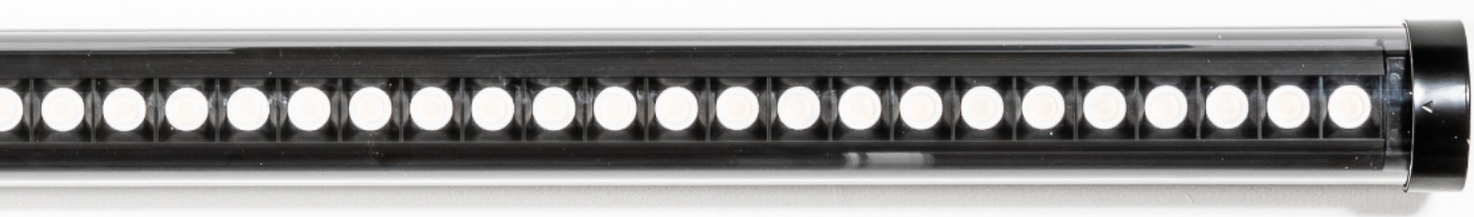

Slight®

slightly different

Tracklights



p.8 Target



p.20 Fost Track



p.32 Blit Track



p.40 Via Track

Downlights



p. 66 Kobo



p. 74 Deep



p. 88 Troop



p. 102 Croc



p. 112 Backlight



p. 120 Fost Recessed



p. 130 Fost Pulldown



p. 140 Uno



p. 150 Teide



p. 162 Tulipa



p. 174 Podium

Surface



p. 198 Scuba



p. 208 Fost Surface



p. 218 Fost Ceiling



p. 228 Domio



p. 240 Podium Surface

Suspended



p. 254 Fost Pendant

Systems



p. 266 Neso



p. 270 Neso Slim



p. 284 Via Evolution



TRACKLIGHT

Less is more. The design of the TARGET track projector achieves the minimum expression of visual volume, making the place appear spacious and bringing the architecture and the elements to be lit to the forefront.

Its wide range of colour temperature, different optics and high CRI options makes it a perfect option for commercial spaces, hotels, restaurants and retail.



Slight®
slightly different

TARGET





Slight®
slightly different

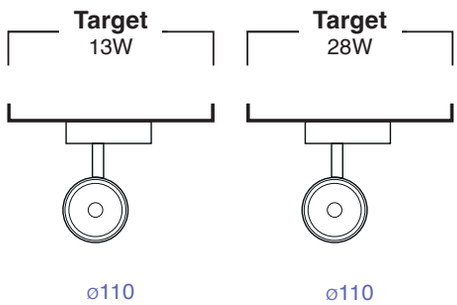

FINISH

● Black ○ White

COLOR TEMPERATURE

2700K CRI90	3000K CRI90	4000K CRI90
2700K CRI97	3000K CRI97	4000K CRI97

MEAT | BREAD | FASHION | LEAF *

BEAM ANGLE



ACCESSORIES



Honeycomb | Striped Glass | Long Snoot

CONTROL SYSTEM

DALI CASAMBI

Highlights



Accessory

Honeycomb



Long Snoot



Striped Glass



Built-in track



High CRI



Several color temperatures



LEAF: Light source for plant growth.

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch



Slight®
slightly different



Honeycomb



Long Snoot



Striped Glass



Striped Glass

Accesories

Honeycomb	Long Snoot	Striped Glass
● 011400098		● 011400097
● 011400096	● 011400099	● 011400095



Restaurant

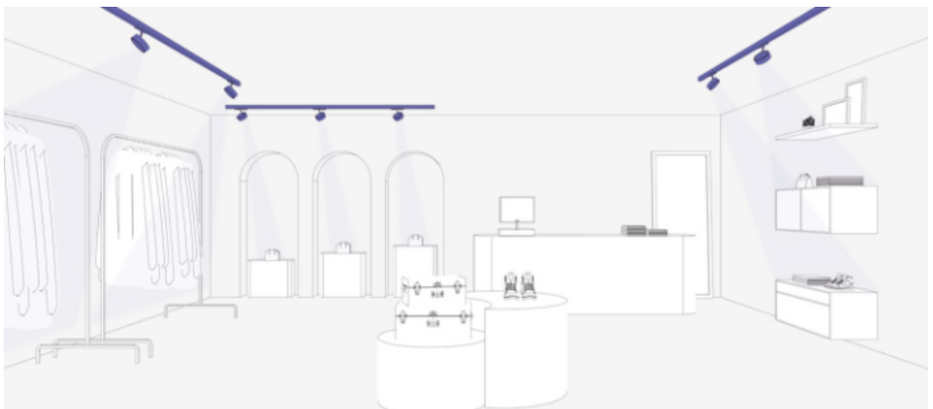

Retail

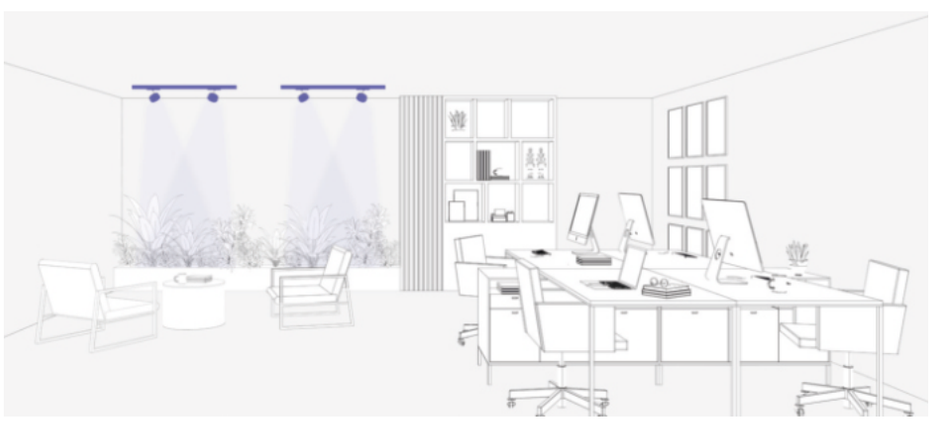

Office

Beam Angle



15°



35°

TARGET **13W** NEW

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0214 Target 13W	**927** 2700K CRI90	**1** 15°	**1** White	**W** CASAMBI
	930 3000K CRI90	**3** 35°	**2** Black	**D** DALI
	940 4000K CRI90			ON/OFF
	X27 2700K CRI97			
	X30 3000K CRI97			
	X40 4000K CRI97			
	MT MEAT			
	BR BREAD			
	FS FASHION			
N	**LF** LEAF			

0214	**927**	**1**	**1**	**W**

Example **021492711W** — Target13W 2700K CRI90 15° White Casambi



15°



35°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	13W	970 / 1048lm	15° / 35°
x27		97	13W	872 / 943lm	15° / 35°
930	3000K	90	13W	1000 / 1080lm	15° / 35°
x30		97	13W	900 / 972lm	15° / 35°
940	4000K	90	13W	1029 / 1113lm	15° / 35°
x40		97	13W	927 / 1001lm	15° / 35°
MT	3100K	-	13W	1143 / 1226lm	15° / 35°
BR	2500K	-	13W	847 / 909lm	15° / 35°
FS	3100K	-	13W	1168 / 1253lm	15° / 35°
LF	2700K	-	13W	665 / 693lm	15° / 35°


Slight®
slightly different

TARGET **28W**

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0114 Target 28W	**927** 2700K CRI90	**1** 15°	**1** White	**W** CASAMBI
	930 3000K CRI90	**3** 35°	**2** Black	**D** DALI
	940 4000K CRI90			ON/OFF
	X27 2700K CRI97			
	X30 3000K CRI97			
	X40 4000K CRI97			
	MT MEAT			
	BR BREAD			
	FS FASHION			
N	**LF** LEAF			



15°



35°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	28W	2311lm / 2157lm	15° / 35°
X27		97	28W	2079lm / 1941lm	15° / 35°
930	3000K	90	28W	2382lm / 2224lm	15° / 35°
X30		97	28W	2144lm / 2001lm	15° / 35°
940	4000K	90	28W	2453lm / 2291lm	15° / 35°
X40		97	28W	2208lm / 2061lm	15° / 35°
MT	3100K	-	28W	2723lm / 2523lm	15° / 35°
BR	2500K	-	28W	2018lm / 1871lm	15° / 35°
FS	3100K	-	28W	2783lm / 2579lm	15° / 35°
LF	2700K	-	28W	1584lm / 1426lm	15° / 35°

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch



Slight®
slightly different

The FOST TRACK family of track projectors was born to meet the need to accentuate what needs to be highlighted. A minimalist design that is easy to integrate into any space, bringing the architecture to the forefront. The location of the driver in the actual track adaptor facilitates this integration.



Slight®
slightly different

FOST



FOST Collection



Recessed	Pulldown	Ceiling	Surface	Pendant
171	181	277	267	323



Slight®
slightly different

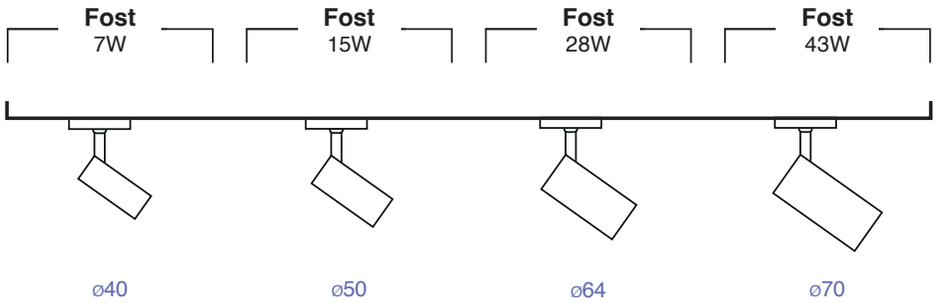

FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90	**3000K CRI90**	**4000K CRI90**
2700K CRI97	**3000K CRI97**	**4000K CRI97**
MEAT	**BREAD**	**FASHION**

BEAM ANGLE

12° / 17° / 18° | 20° / 23° / 25° | 35° / 36° | 60°

ACCESSORIES

Honeycomb | Striped glass | Spread Glass

White Ring | Copper Ring | Snoot

CONTROL SYSTEM

DALI | CASAMBI | TRIAC

Highlights



Its versatility of sizes and optics makes it an ideal solution for commercial spaces, hotels, restaurants, retail and even domestic spaces due to its colour temperature and CRI options.



Different sizes



Built-in track



High CRI



Several color temperatures



Slight®
slightly different



White Ring



Copper Ring



Striped Glass



Long Snoot

Its multiple accessories and combinations facilitate the product's personalisation, giving it certain architectural relevance and at the same time making it possible to modify the beam or reduce glare.



Spread Glass



Honeycomb



Without accessory



Spread Glass



Striped Glass

Accesories

	Honeycomb	White Ring	Copper Ring	Spread Glass	Long Snoot	Striped Glass
ø40	-	011500099	011500098	-	-	-
ø50	-	011600099	011600098	-	-	-
ø64	011700094	011700099	011700098	011700097	011700095	011700096
ø70	011800094	011800099	011800098	011800097	011800095	011800096

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch



Restaurant

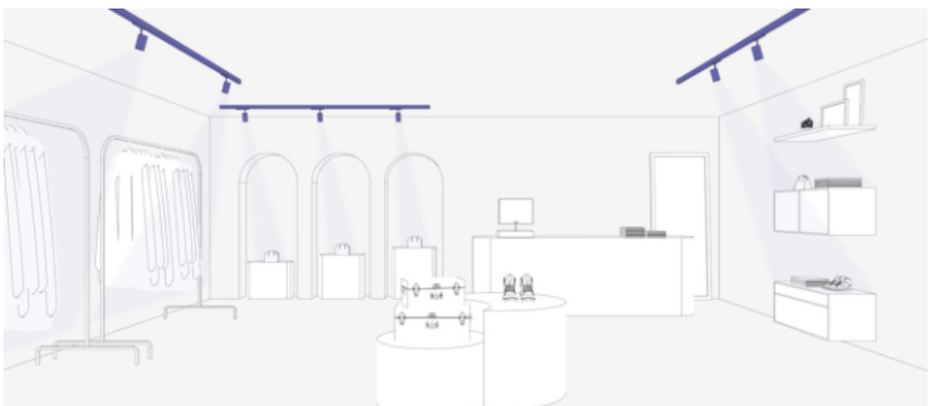

Retail

Beam Angle



12/17/18°



20/23/25°



35/36°



60°

FOST **TRACK 40**

incl. DIM 355° 90° 50.000hs L70 / B10 MacAdam 2&3 220-240V 50 / 60Hz 650°C







Family	Color T°	Beam Angle	Finish	Control System
0115 Fost Track ø40 7W	**927** 2700K CRI90	**1** 18°	**1** White	**W** CASAMBI
	930 3000K CRI90	**2** 23°	**2** Black	**D** DALI
	940 4000K CRI90	**3** 35°		ON/OFF
	X27 2700K CRI97			
	X30 3000K CRI97			
	X40 4000K CRI97			

0115	**927**	**1**	**1**	**W**

Example **011592711W** — Fost Track ø40 7W 2700K CRI90 18° White Casambi



18°



23°



35°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	7W	632lm / 553lm / 586lm	18° / 23° / 35°
X27		97	7W	569lm / 498lm / 527lm	18° / 23° / 35°
930	3000K	90	7W	652lm / 570lm / 604lm	18° / 23° / 35°
X30		97	7W	587lm / 513lm / 544lm	18° / 23° / 35°
940	4000K	90	7W	672lm / 587lm / 622lm	18° / 23° / 35°
X40		97	7W	604lm / 528lm / 560lm	18° / 23° / 35°

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

FOST **TRACK 50**

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0116 Fost Track ø50 15W	**927** 2700K CRI90	**1** 20°	**1** White	**W** CASAMBI
	930 3000K CRI90	**2** 26°	**2** Black	**D** DALI
	940 4000K CRI90	**3** 36°		ON/OFF
	X27 2700K CRI97			N **C** TRIAC
	X30 3000K CRI97			
	X40 4000K CRI97			



20°



26°



36°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	15W	1235lm / 1257lm / 1303lm	20° / 26° / 36°
X27		97	15W	1111lm / 1131lm / 1172lm	20° / 26° / 36°
930	3000K	90	15W	1273lm / 1295lm / 1343lm	20° / 26° / 36°
X30		97	15W	1146lm / 1166lm / 1209lm	20° / 26° / 36°
940	4000K	90	15W	1311lm / 1334lm / 1383lm	20° / 26° / 36°
X40		97	15W	1180lm / 1201lm / 1245lm	20° / 26° / 36°

FOST **TRACK 64**

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0117 Fost Track ø64 28W	**927** 2700K CRI90	**1** 17°	**1** White	**W** CASAMBI
	930 3000K CRI90	**2** 25°	**2** Black	**D** DALI
	940 4000K CRI90	**3** 35°		ON/OFF
	X27 2700K CRI97	N **6** 60°		N **C** TRIAC
	X30 3000K CRI97			
	X40 4000K CRI97			



17°



25°



35°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	28W	2982lm / 2987lm / 2732lm / 2270lm	17° / 25° / 35° /60°
X27		97	28W	2684lm / 2688lm / 2459lm / 2043lm	17° / 25° / 35° /60°
930	3000K	90	28W	3075lm / 3080lm / 2817lm / 2341lm	17° / 25° / 35° /60°
X30		97	28W	2767lm / 2771lm / 2535lm / 2107lm	17° / 25° / 35° /60°
940	4000K	90	28W	3167lm / 3172lm / 2902lm / 2412lm	17° / 25° / 35° /60°
X40		97	28W	2850lm / 2855lm / 2611lm / 2170lm	17° / 25° / 35° /60°

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

FOST **TRACK 70**

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0118 Fost Track ø70 43W	**927** 2700K CRI90	**1** 18°	**1** White	**W** CASAMBI
	930 3000K CRI90	**2** 23°	**2** Black	**D** DALI
	940 4000K CRI90	**3** 36°		ON/OFF
	X27 2700K CRI97	N **6** 60°		N **C** TRIAC
	X30 3000K CRI97			
	X40 4000K CRI97			
	MT MEAT			
	BR BREAD			
	FS FASHION			



18°



23°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	43W	2954lm / 2931lm / 2920lm / 2800lm	18° / 23° / 36° / 60°
X27		97	43W	2658lm / 2638lm / 2628lm / 2520lm	18° / 23° / 36° / 60°
930	3000K	90	43W	3045lm / 3022lm / 3010lm / 2886lm	18° / 23° / 36° / 60°
X30		97	43W	2741lm / 2720lm / 2709lm / 2597lm	18° / 23° / 36° / 60°
940	4000K	90	43W	3136lm / 3113lm / 3100lm / 2972lm	18° / 23° / 36° / 60°
X40		97	43W	2823lm / 2801lm / 2790lm / 2675lm	18° / 23° / 36° / 60°
MT	-	-	43W	2165lm / 2149lm / 2140lm / 2052lm	18° / 23° / 36° / 60°
BR	-	-	43W	2921lm / 2899lm / 2888lm / 2769lm	18° / 23° / 36° / 60°
FS	-	-	43W	2998lm / 2976lm / 2964lm / 2842lm	18° / 23° / 36° / 60°

BLIT TRACK is a versatile solution hat provides flexibility and adaptability for various lighting applications.

Designed to integrate into track lighting systems, it allows for precise light direction.

Its elegant design enhances any environment and offers soft, ambient lighting that creates a cozy atmosphere.

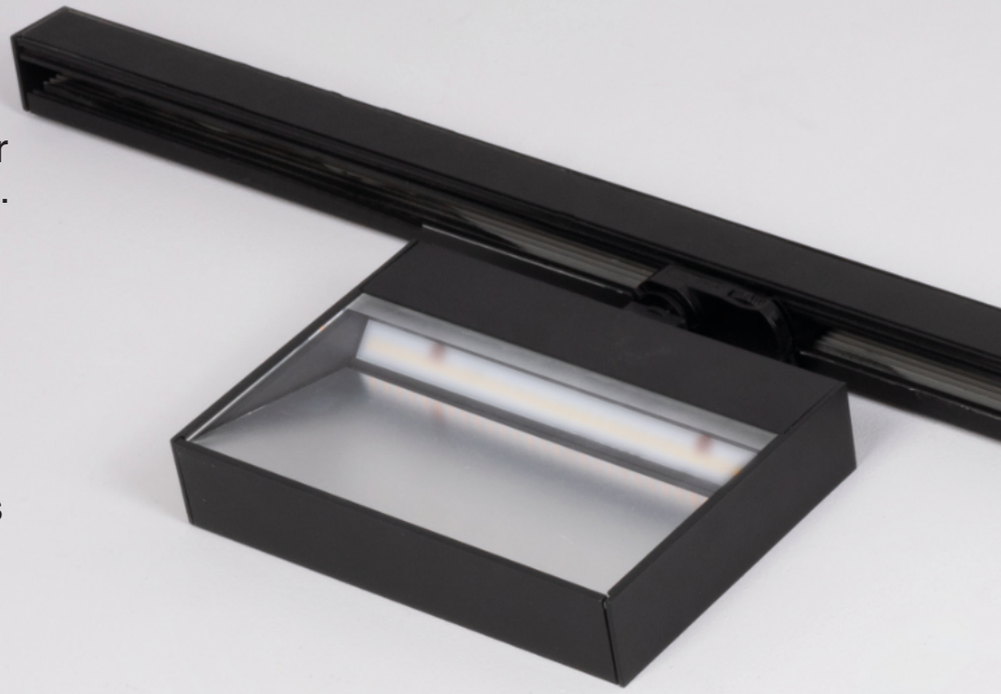



Slight®
slightly different

BLIT



Surface
241



Slight®
slightly different

Blit 210mm
20W



Blit 300mm
33W



FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90 **3000K CRI90** **4000K CRI90**

BEAM ANGLE



CONTROL SYSTEM

DALI CASAMBI

Highlights

Available in two power options and made entirely of aluminum and glass, BLIT TRACK provides general illumination through indirect light. Its minimalist design makes it perfect for complementing other track luminaires, such as projectors or linear lights, in environments like restaurants or commercial spaces.





High CRI



High-quality materials



Minimal design

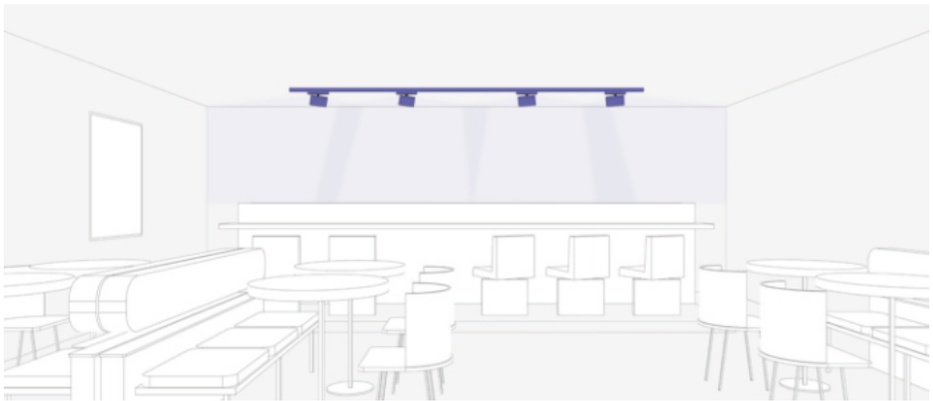

Restaurant

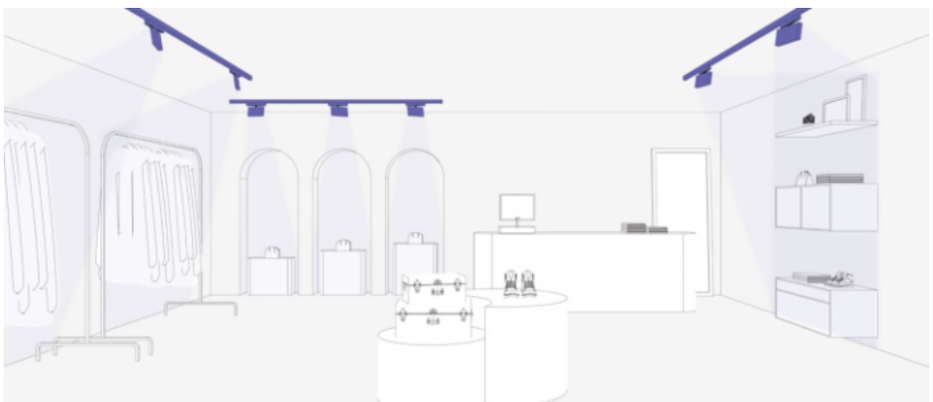

Retail

Beam Angle



Asym°

BLIT TRACK NEW

incl. DIM 355° 30° 50.000hs L80 / B10 MacAdam 3 220-240V 50 / 60Hz 850°C













Family		Color T°		Beam Angle		Finish		Control System	
0127	Blit track 210mm 20W	927	2700K CRI90	9	Asym	1	White	D	DALI
0128	Blit track 300mm 33W	930	3000K CRI90			2	Black	W	CASAMBI
		940	4000K CRI90						ON/OFF

0127	927	9	1	D

Example **012792791D** — Blit track 210mm 20W 2700K CRI90 White Dali



Asym

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	20w	1633	Asym
		90	33w	3412	Asym
930	3000K	90	20w	1684	Asym
		90	33w	3517	Asym
940	4000K	90	20w	1734	Asym
		90	33w	3623	Asym



Slight®
slightly different

VIA EVO TRACK is a linear luminaire designed to seamlessly integrate into three-phase track systems. When combined with our other track luminaires, it becomes an efficient solution for providing general lighting in various spaces.

It offers three different color temperatures and also comes in Tuneable White and UGR versions, allowing for lighting adjustment to meet specific needs.



Slight®
slightly different

VIA



System
369



Slight®
slightly different

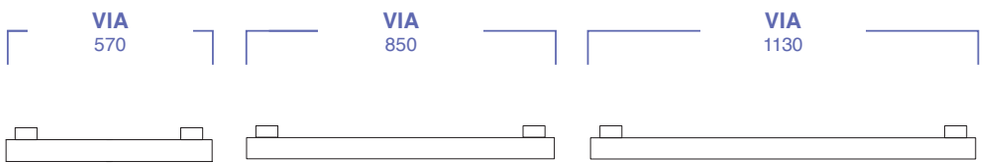

FINISH

● Black ○ White

COLOR TEMPERATURE

3000K CRI80 | 4000K CRI80 | 2700-6500K | LEAF *

DIFFUSER



Opal | Microprisma | UGR

CONTROL SYSTEM

DALI CASAMBI

Highlights



LEAF: Light source for plant growth.

Offering three different sizes and a variety of power options to adapt to the lighting needs of each space, VIA EVO TRACK is also available in UGR versions, ideal for office environments, and in TW versions, designed to provide circadian cycle lighting in specific spaces.



Tunable white



Different sizes



Several color temperatures



UGR<19

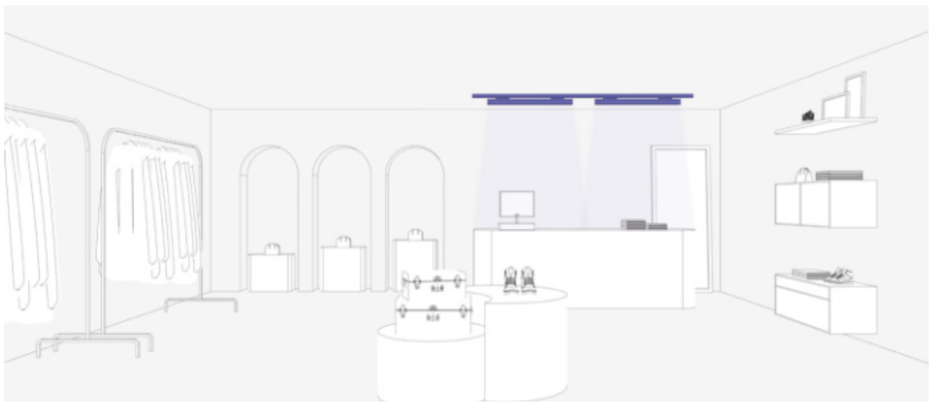

Retail



Office

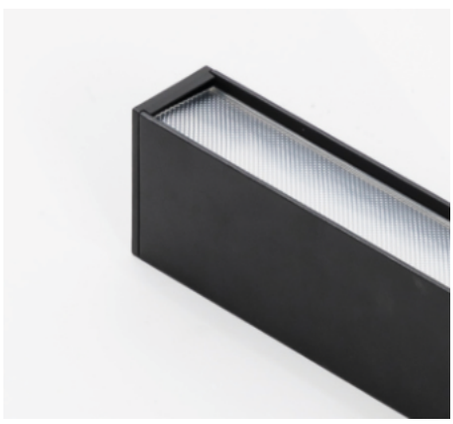

Microprisma



90°

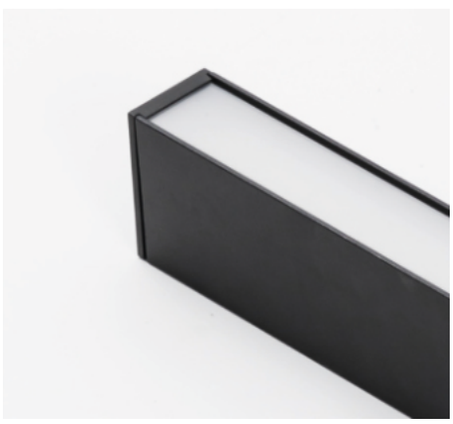

Opal



110°



UGR



50°



80°



Asym°

VIA **TRACK 570** NEW

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C





Family	Power		Finish	Control System	Diffuser
0410T Via Evo	590	Track 15W 3000K CRI80	1 White	ON/OFF	Opal
	570	Track 25W 3000K CRI80	2 Black	W CASAMBI	U Microprisma
	680	Track 15W 4000K CRI80		D DALI	
	660	Track 25W 4000K CRI80			
0410T Via Evo	010	Track 27W 2700-6500K TW	1 White	W CASAMBI	Opal
			2 Black	DALI	U Microprisma

0410T	570	1	W

Example **0410T5701W** — Via Evo Track 570 mm 25W 3000K Opal White

VIA **TRACK 850** NEW

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C





Family	Power		Finish	Control System	Diffuser
0410T Via Evo	560	Track 20W 3000K CRI80	1 White	ON/OFF	Opal
	540	Track 38W 3000K CRI80	2 Black	W CASAMBI	U Microprisma
	650	Track 20W 4000K CRI80		D DALI	
	630	Surface 38W 4000K CRI80			
0410T Via Evo	030	Track 39W 2700-6500K TW	1 White	W CASAMBI	Opal
			2 Black	DALI	U Microprisma

VIA **TRACK 1130**

NEW

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C | UGR 16







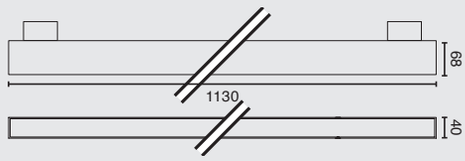

Family		Power		Finish		Control System		Diffuser	
0410T	Via Evo	530	Track 27W 3000K CRI80	1	White		ON/OFF		Opal
		510	Track 51W 3000K CRI80	2	Black	W	CASAMBI	U	Microprisma
		620	Track 27W 4000K CRI80			D	DALI		
		600	Track 51W 4000K CRI80						
	N	LF	Track Leaf 33W						
0410T	Via Evo	050	Track 48W 2700-6500K TW	1	White	W	CASAMBI		Opal
				2	Black		DALI	U	Microprisma
0410T	Via Evo	110	Track UGR 32W 3000K CRI80	1	White		ON/OFF	8	UGR<19 80°
		120	Track UGR 32W 4000K CRI80	2	Black	W	CASAMBI	5	UGR<16 50°
		111	Track UGR 17W 3000K CRI80			D	DALI	0	UGR<19 asim.
		121	Track UGR 17W 4000K CRI80						
0410T	Via Evo	010	Track UGR 54W 2700-6500K TW	1	White	W	CASAMBI	8	UGR<19 80°
				2	Black		DALI	5	UGR<16 50°
								0	UGR<19 asim.

VIA **TRACK**

570mm

Option	Color T°	CRI	Difusor	Power	Lumen Output	Beam Angle
590	3000K	80	Opal / Microprisma	15W	1392lm / 1133lm	110° / 90°
570		80	Opal / Microprisma	25W	2506m / 2039m	110° / 90°
680	4000K	80	Opal / Microprisma	15W	1434lm / 1167lm	110° / 90°
660		80	Opal / Microprisma	25W	2581lm / 2100lm	110° / 90°
010	2700-6500K	TW	Opal / Microprisma	27W	1964lm / 1598lm	110° / 90°

850mm

560	3000K	80	Opal / Microprisma	20W	2131lm / 1735lm	110° / 90°
540		80	Opal / Microprisma	38W	3809lm/ 3121lm	110° / 90°
650	4000K	80	Opal / Microprisma	20W	2195lm / 1787lm	110° / 90°
630		80	Opal / Microprisma	39W	3923lm / 3214lm	110° / 90°
010	2700-6500K	TW	Opal / Microprisma	39W	2985lm / 2429lm	110° / 90°

1130mm

530	3000K	80	Opal / Microprisma	27W	2842lm / 2313lm	110° / 90°
510		80	Opal / Microprisma	51W	5112lm / 4161lm	110° / 90°
620	4000K	80	Opal / Microprisma	27W	2927lm / 2382lm	110° / 90°
600		80	Opal / Microprisma	51W	5265lm / 4286lm	110° / 90°
050	2700-6500K	TW	Opal / Microprisma	48W	4006lm / 3261lm	110° / 90°
110	3000K	80	UGR<16 / UGR<19	32W	3989lm / 4104lm / 3739lm	50° / 80° / Asym
120	4000K	80	UGR<16 / UGR<19	32W	4109lm / 4227lm / 3851lm	50° / 80° / Asym
010	2700-6500K	TW	UGR<16 / UGR<19	54W	4830lm / 4881lm / 4467lm	50° / 80° / Asym


Slight®
slightly different

How to install

3Phase track, 16 A

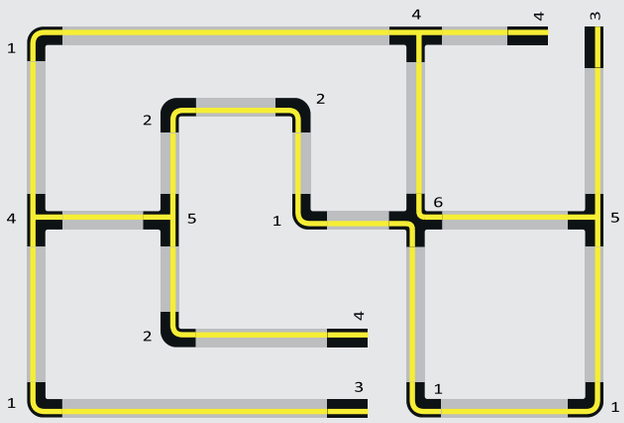

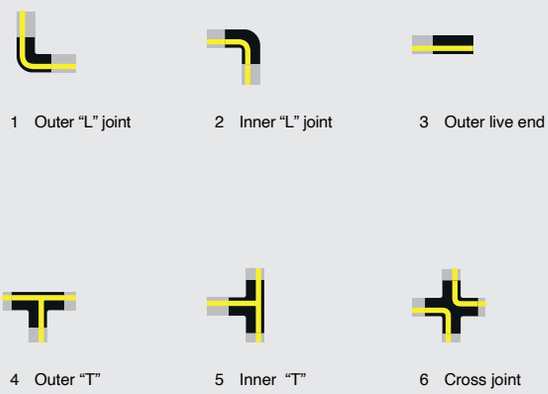

1 Outer “L” joint

2 Inner “L” joint

3 Outer live end

4 Outer “T”

5 Inner “T”

6 Cross joint

Connection sketch

1 Circuit



N-conductor i = 16 A max

2 Circuit



N-conductor i = 16 A max

3 Circuit



L1 + L2 + L3 i = 16 A max

Recommended distance between fixing



Max.Weight: 19,84 lb Max. 3 projectors = 3,8 KVA

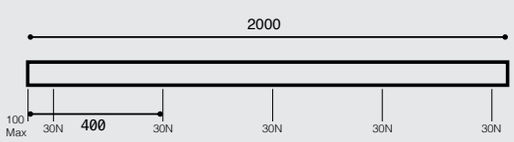

Max.Weight: 33,06 lb Max. 5 projectors = 3,8 KVA

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

3Phase Track



slight®
slightly different



Surface & Suspended 3 phase track

01990101	White	1000 mm
01990102	Black	1000 mm
01990201	White	2000 mm
01990202	Black	2000 mm

Inner live end



01990601	White
01990602	Black

Outer live end



01990701	White
01990702	Black

Centre feed



01993301	White
01993302	Black

Inner “L” Joint



01990501	White
01990502	Black

Outer “L” Joint



01990401	White
01990402	Black

Outer “T”



01990901	White
01990902	Black

Inner “T”



01991601	White
01991602	Black

Ceiling kit 1piece



01991201	Aluminium

Cross Joint



01991001	White
01991002	Black

Intermediate Joint



01990801	White
01990802	Black

End cap



01991101	White
01991102	Black

Flexible “L”



01993201	White
01993202	Black

Pendant Kit 2000



01990301	White
01990302	Black

Base for surface



01991301	White
01991302	Black

Adapter / track connector



01997001	White
01997002	Black



Surface & Suspended Dali track

01990101D	○ White	1000 mm
01990102D	● Black	1000 mm
01990201D	○ White	2000 mm
01990202D	● Black	2000 mm

Dali inner live end



01993501D	○ White
01993502D	● Black

Dali outer live end



01993601D	○ White
01993602D	● Black

Dali centre feed



01993301D	○ White
01993302D	● Black

Inner “L” Joint



01990501D	○ White
01990502D	● Black

Outer “L” Joint



01990401D	○ White
01990402D	● Black

Ceiling kit 1piece



01991201D	○ White
01991202D	● Black

Intermediate Joint



01990801D	○ White
01990802D	● Black

End cap



01991101D	○ White
01991102D	● Black

Flexible “L”



01993201D	○ White
01993202D	● Black

Pendant Kit 5000



01990301D	○ White
01990302D	● Black

Base for surface



01991301D	○ White
01991302D	● Black

Adapter / track connector



01997001D	○ White
01997002D	● Black



Recessed 3 phase track

01997101	White	1000 mm
01997102	Black	1000 mm
01997201	White	2000 mm
01997202	Black	2000 mm

Inner live end



01997401	White
01997402	Black

Outer live end



01997301	White
01997302	Black

Centre feed



01997801	White
01997802	Black

Intermediate Joint



01997501	White
01997502	Black

End cap



01997701	White
01997702	Black

Ceiling Kit 1piece



01997601	Aluminium

Adapter / track connector



01997001	White
01997002	Black



Slight®
slightly different


Slight®
slightly different

DOWNLIGHTS

The KOPE downlight is the perfect solution for spaces with sloped ceilings or where precise light orientation is required. Its minimalist design makes it ideal for discreet integration into any environment.

This versatile and compact downlight can be tilted and recessed according to lighting needs, providing complete control over the direction of light and adding functionality and elegance to any space.



Slight®
slightly different



KOPE



Slight®
slightly different

Kope 7W



Kope 13W



FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90 **3000K CRI90** **4000K CRI90**

BEAM ANGLE



CONTROL SYSTEM

DALI CASAMBI

Highlights



With two sizes and powers, Kope stands out for its ability to be adjustable, as well as for its “up-down” movement. Ideal for sloped ceilings where the light beam is to be kept vertical, or for light points where an adjustable or directional beam is desired.



Consider the installation height in your project



High CRI



Several color temperatures



Possibility orientation, up down



Restaurant

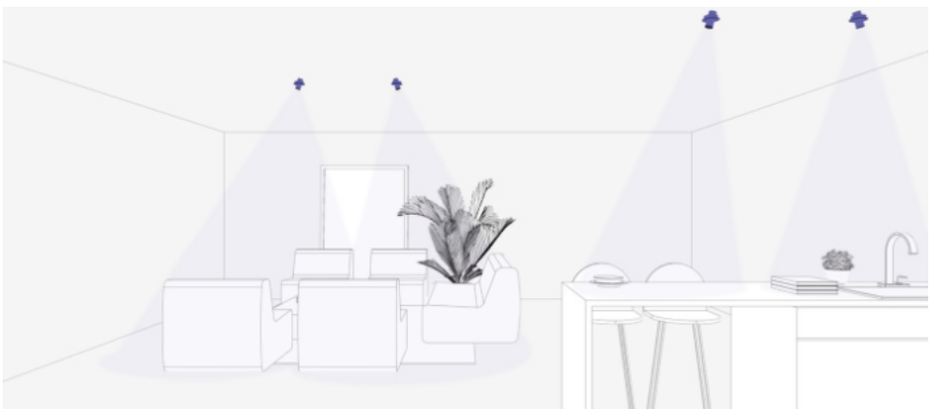

Home

Beam Angle



20°



36°

KOPE

NEW

incl. DIM 50.000hs L70 / B10 MacAdam 3 220- 240V 50/ 60Hz 650°C





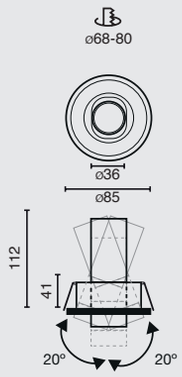





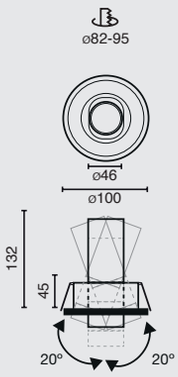

Family		Color T°		Beam Angle		Finish		Control System	
0225	Kope 7W	927	2700K CRI90	2	20°	1	White	W	CASAMBI
0226	Kope 13W	930	3000K CRI90	4	36°	2	Black	D	DALI
		940	4000K CRI90						ON/OFF

0354	927	6	1	W

Example **0022592721W** — Kope 7W 2700K CRI90 20° White Casambi

Kope 7W

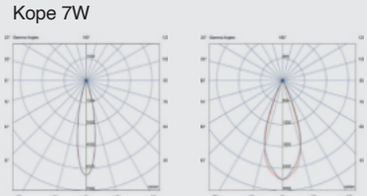

20° 36°

Kope 13W

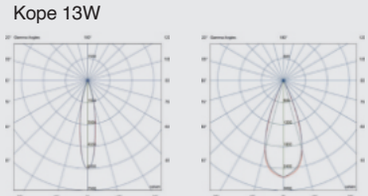

20° 36°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	7w	451/494	20°/36°
		90	13w	859/818	20°/36°
930	3000K	90	7w	465/495	20°/36°
		90	13w	886/837	20°/36°
940	4000K	90	7w	479/524	20°/36°
		90	13w	913/868	20°/36°

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch



Slight®
slightly different

The KOBO downlight is a robust and reliable solution, with an IP67 rating, making it ideal for applications in hospitals and industries where resistance and durability are crucial.

With two available beam angles, it can adapt to a wide range of lighting needs, from general illumination to specific tasks.

Its solid design and features ensure high performance in demanding environments where light quality is essential.



KOBO



Slight®
slightly different

Kobo



ø235

FINISH

○ White

COLOR TEMPERATURE

2700K CRI90 | 3000K CRI90 | 4000K CRI90 | 2700-6500K

BEAM ANGLE



CONTROL SYSTEM

DALI CASAMBI

Highlights

With two options for beam angles, a UGR below 19, and an IP67 protection rating, this downlight becomes the ideal choice for hospital environments. The Tunable White version provides the flexibility to offer circadian cycle lighting.



IP65
IP65



High CRI
Alto IRC



Tunable white



UGR<19



Hospital

Beam Angle



60°



100°

KOBO NEW

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | IP65 | 220- 240V 50/ 60Hz | 650°C



60°



100°



Family	Color T°	Beam Angle	Finish	Control System
0354 Kobo 27W **0355** Kobo 15W	**927** 2700K CRI90 **930** 3000K CRI90 **940** 4000K CRI90	**6** 60° **9** 100°	**1** White	**W** CASAMBI **D** DALI ON/OFF
0354 Kobo 27W	**TW** 2700-6500K	**9** 100°	**1** White	**W** CASAMBI **D** DALI
0354	**927**	**6**	**1**	**W**

Example **035492761W** — Kobo 27W 2700K CRI90 60° White Casambi



60°



100°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	15W	1506/1661lm	60° / 100°
			27W	2394/2640lm	
930	3000K	90	15W	1551/1711lm	60° / 100°
			27W	2468/2722lm	
940	4000K	90	15W	1598/1762lm	60° / 100°
			27W	2542/2804lm	
TW	2000-6000K	90	27W	1672lm	100°


Slight®
slightly different

DEEP is a series of recessed light fixtures available in 3 sizes (S, M, L), two formats (round or square) and with or without frame.

Its wide range of colour temperature, different optics and CRI options makes it a perfect option for commercial spaces, hotels, restaurants and retail.

Its accessories enable better glare control and maximum visual comfort.



Slight®
slightly different

DEEP

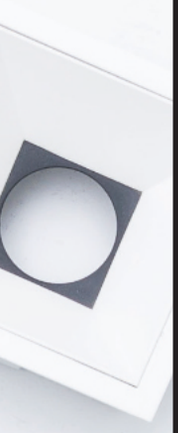











Slight®
slightly different

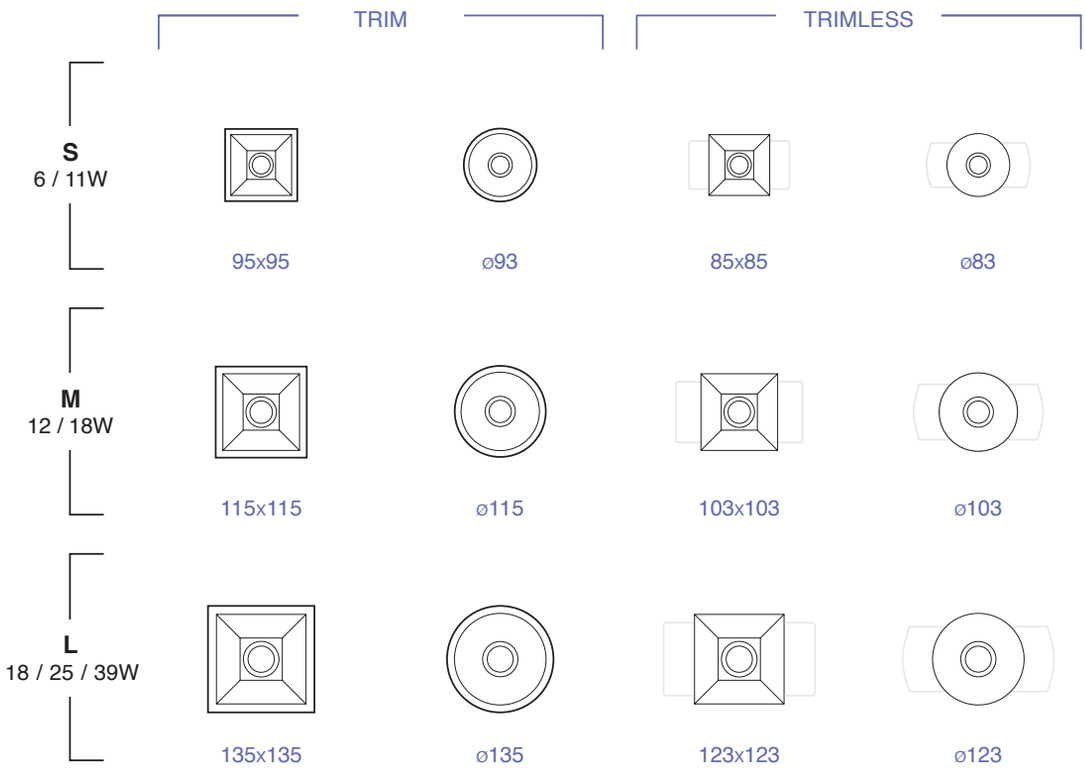

FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90 | **3000K CRI90** | **4000K CRI90** | **FASHION**

BEAM ANGLE



ACCESSORIES



Honeycomb | Striped glass | Spread Glass

CONTROL SYSTEM

DALI CASAMBI TRIAC

Highlights

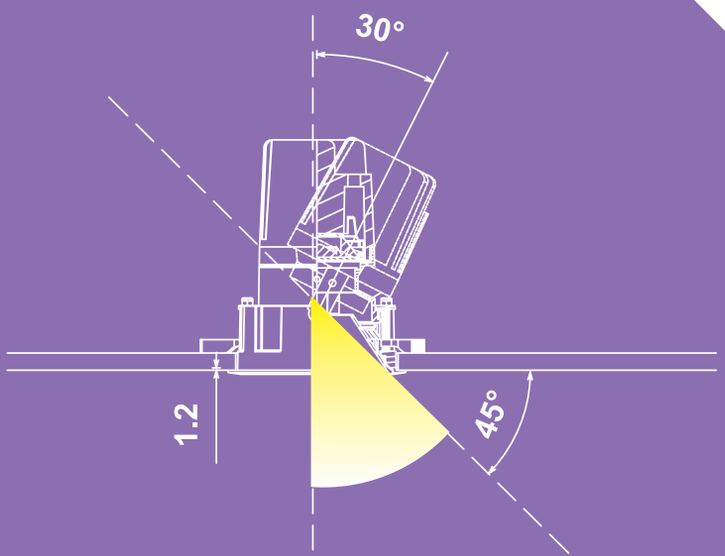



Different sizes



High-quality materials



Adjustable



Several color temperatures

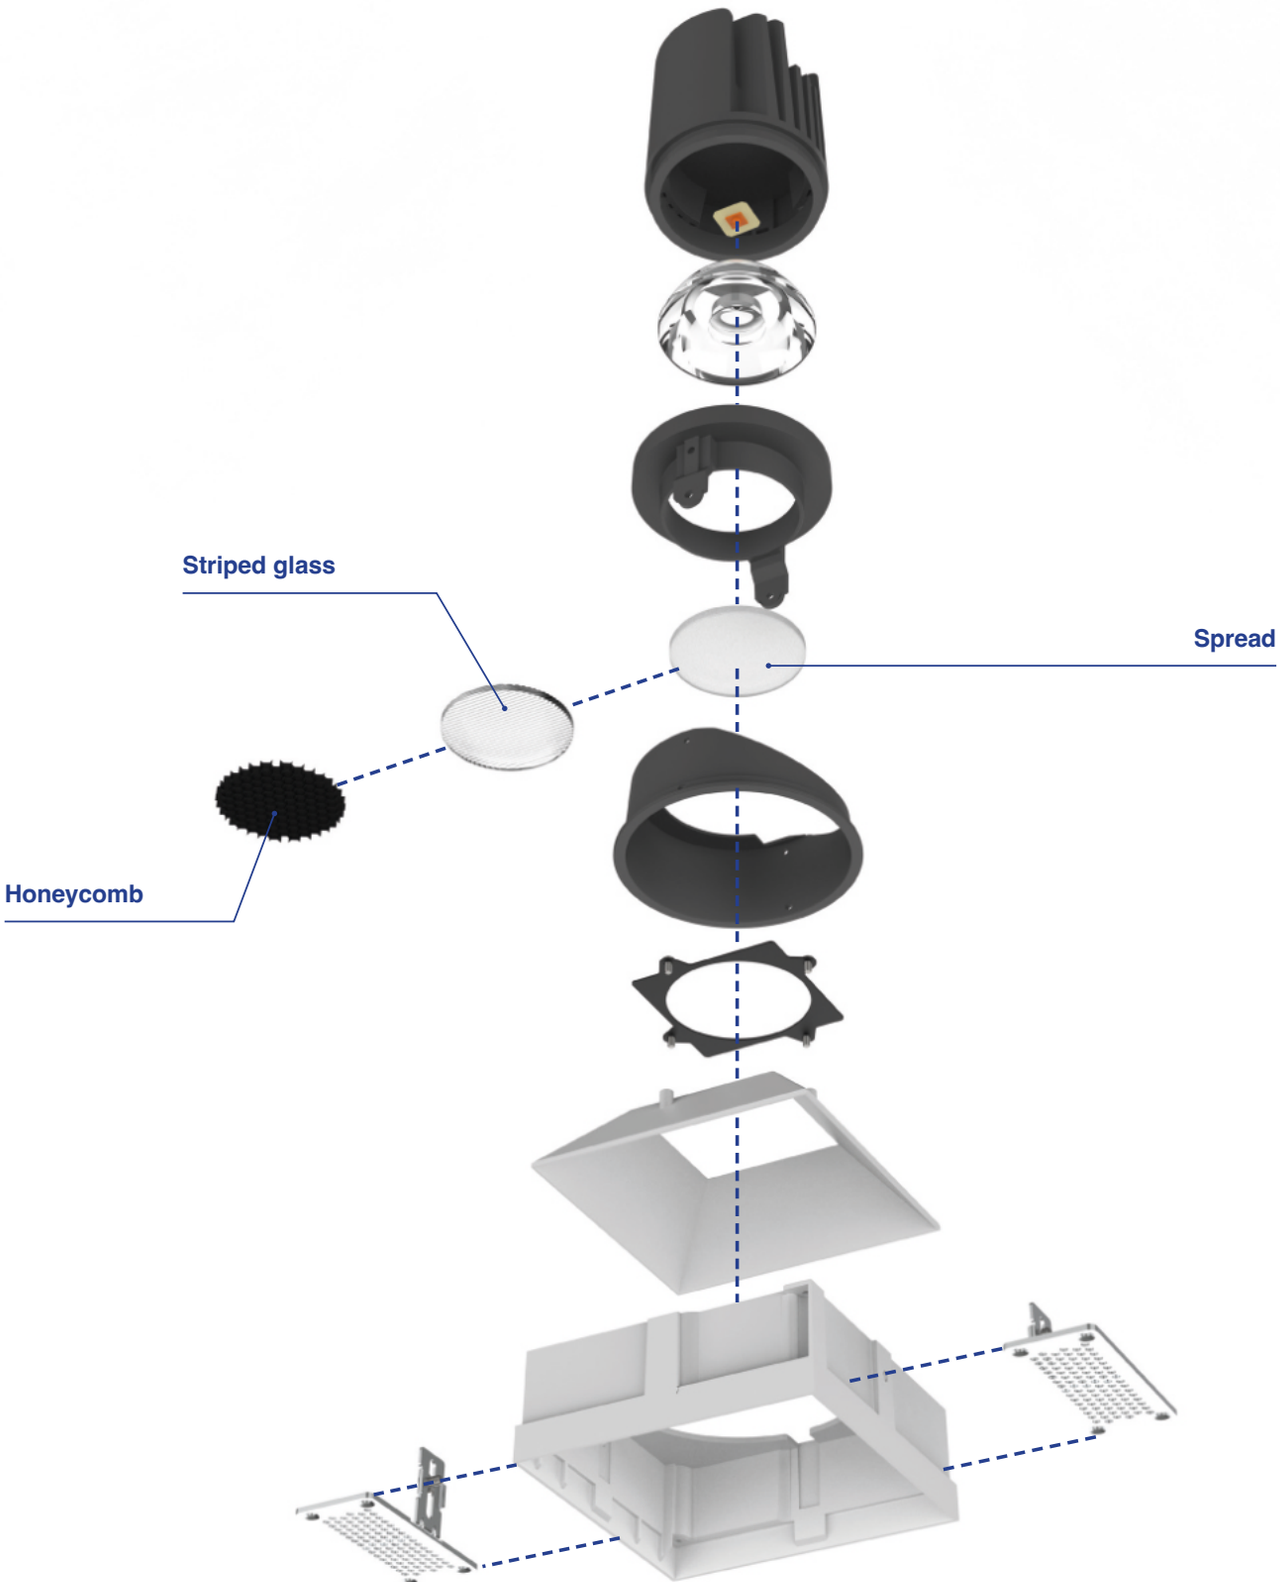
Striped glass
Spread
Honeycomb



Honeycomb



Striped glass



Spread



Without accessory



Spread Glass



Striped Glass



Office



Restaurant

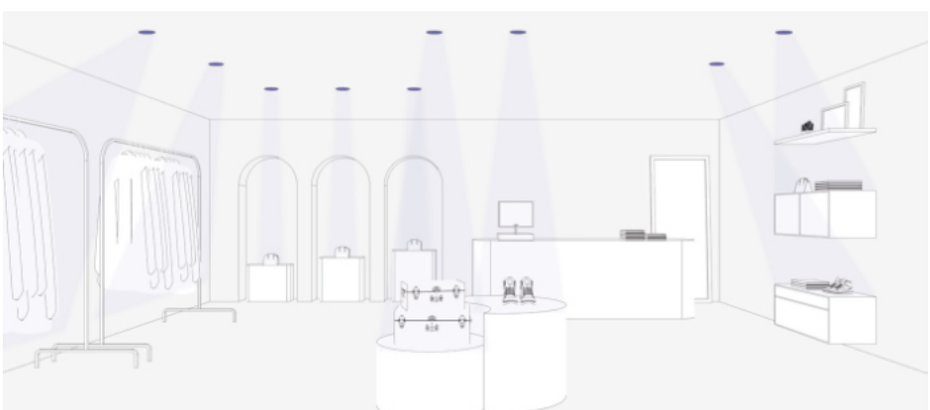

Retail

Beam Angle



15°



36°



60°

DEEP **S Round**

no incl. | DIM | 355° | 30° | 50.000hs L90 / B10 | MacAdam 2 | IP23 | 6W 200mA 29V | 11W 350mA 30V | 650°C













Family		Color T°		Beam Angle		Finish		Accessory	
30135	Deep S Round	**927**	2700K CRI90	**1**	15°	**1**	White		No accesory
30235	Deep S Round Trimless	**930**	3000K CRI90	**3**	36°	**2**	Black	**H**	Honeycomb
		940	4000K CRI90	**6**	60°			**S**	Striped glass
								D	Spread

30135	**827**	**1**	**1**	**H**

Example **3013582711H** — Deep 60 Round 2700K 15° White Honeycomb



15°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	6W	291 / 352 / 287lm	15° / 36° / 60°
			11W	466 / 514 / 453lm	15° / 36° / 60°
930	3000K	90	6W	301 / 363 / 296lm	15° / 36° / 60°
			11W	481 / 530 / 467lm	15° / 36° / 60°
940	4000K	90	6W	310 / 374 / 305lm	15° / 36° / 60°
			11W	495 / 546 / 481lm	15° / 36° / 60°

DEEP **S Square**

no incl. | DIM | 355° | 30° | 50.000hs L90 / B10 | MacAdam 2 | IP23 | 6W 200mA 29V | 11W 350mA 30V | 650°C













Family		Color T°		Beam Angle		Finish		Accessory	
30335	Deep S Square	**927**	2700K CRI90	**1**	15°	**1**	White		No accesory
30435	Deep S Square Trimless	**930**	3000K CRI90	**3**	36°	**2**	Black	**H**	Honeycomb
		940	4000K CRI90	**6**	60°			**S**	Striped glass
								D	Spread



15°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	6W	291 / 352 / 287lm	15° / 36° / 60°
			11W	466 / 514 / 453lm	15° / 36° / 60°
930	3000K	90	6W	301 / 363 / 296lm	15° / 36° / 60°
			11W	481 / 530 / 467lm	15° / 36° / 60°
940	4000K	90	6W	310 / 374 / 305lm	15° / 36° / 60°
			11W	495 / 546 / 481lm	15° / 36° / 60°

DEEP **M Round**

no incl. | DIM | 355° | 30° | 50.000hs L90 / B10 | MacAdam 2 | IP23 | 12W 350mA 34V | 18W 500mA 36V | 650°C













Family		Color T°		Beam Angle		Finish		Accessory	
30550	Deep M Round	**927**	2700K CRI90	**1**	15°	**1**	White		No accesory
30650	Deep M Round Trimless	**930**	3000K CRI90	**3**	36°	**2**	Black	**H**	Honeycomb
		940	4000K CRI90	**6**	60°			**S**	Striped glass
								D	Spread



15°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	12W	1067 / 920 / 764lm	15° / 36° / 50°
			18W	1217 / 1290 / 1040lm	15° / 36° / 50°
930	3000K	90	12W	110 / 949 / 788lm	15° / 36° / 50°
			18W	1255 / 1330 / 1073lm	15° / 36° / 50°
940	4000K	90	12W	1133 / 977 / 811lm	15° / 36° / 50°
			18W	1292 / 1369 / 1105lm	15° / 36° / 50°

DEEP **M Square**

no incl. | DIM | 355° | 30° | 50.000hs L90 / B10 | MacAdam 2 | IP23 | 12W 350mA 34V | 18W 500mA 36V | 650°C













Family		Color T°		Beam Angle		Finish		Accessory	
30750	Deep M Square	**927**	2700K CRI90	**1**	15°	**1**	White		No accesory
30850	Deep M Square Trimless	**930**	3000K CRI90	**3**	36°	**2**	Black	**H**	Honeycomb
		940	4000K CRI90	**6**	60°			**S**	Striped glass
								D	Spread



15°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	12W	1067 / 920 / 764lm	15° / 36° / 50°
			18W	1217 / 1290 / 1040lm	15° / 36° / 50°
930	3000K	90	12W	110 / 949 / 788lm	15° / 36° / 50°
			18W	1255 / 1330 / 1073lm	15° / 36° / 50°
940	4000K	90	12W	1133 / 977 / 811lm	15° / 36° / 50°
			18W	1292 / 1369 / 1105lm	15° / 36° / 50°

DEEP **L Round**

no incl. | DIM | 355° | 30° | 50.000hs L90 / B10 | MacAdam 2 | IP23 | 18W 500mA 34V | 25W 700mA 35V | 39W 1050mA 37V | 650°C













Family		Color T°		Beam Angle		Finish		Accessory	
30910	Deep L Round	927	2700K CRI90	1	15°	1	White		No accesory
31010	Deep L Round Trimless	930	3000K CRI90	3	36°	2	Black	H	Honeycomb
		940	4000K CRI90	6	60°			S	Striped glass
		941	Fashion CRI95					D	Spread



15°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	18W	1420 / 1487 / 1248lm	15° / 36° / 60°
			25W	1923 / 1990 / 1668lm	15° / 36° / 60°
			39W	2551 / 2845 / 2361lm	15° / 36° / 60°
930	3000K	90	18W	1464 / 1534 / 1287lm	15° / 36° / 60°
			25W	1983 / 2052 / 1720lm	15° / 36° / 60°
			39W	2630 / 2934 / 2435lm	15° / 36° / 60°
940	4000K	90	18W	1507 / 1580 / 1325lm	15° / 36° / 60°
			25W	2042 / 2113 / 1771lm	15° / 36° / 60°
			39W	2708 / 3022 / 2508lm	15° / 36° / 60°

DEEP **L Square**

no incl. | DIM | 355° | 30° | 50.000hs L90 / B10 | MacAdam 2 | IP23 | 18W 500mA 34V | 25W 700mA 35V | 39W 1050mA 37V | 650ºC













Family		Color T°		Beam Angle		Finish		Accessory	
31110	Deep L Square	**927**	2700K CRI90	**1**	15°	**1**	White		No accesory
31210	Deep L Square Trimless	**930**	3000K CRI90	**3**	36°	**2**	Black	**H**	Honeycomb
		940	4000K CRI90	**6**	60°			**S**	Striped glass
		941	Fashion CRI95					**D**	Spread



15°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	18W	1420 / 1487 / 1248lm	15° / 36° / 60°
			25W	1923 / 1990 / 1668lm	15° / 36° / 60°
			39W	2551 / 2845 / 2361lm	15° / 36° / 60°
930	3000K	90	18W	1464 / 1534 / 1287lm	15° / 36° / 60°
			25W	1983 / 2052 / 1720lm	15° / 36° / 60°
			39W	2630 / 2934 / 2435lm	15° / 36° / 60°
940	4000K	90	18W	1507 / 1580 / 1325lm	15° / 36° / 60°
			25W	2042 / 2113/ 1771lm	15° / 36° / 60°
			39W	2708 / 3022/ 2508lm	15° / 36° / 60°

A collection of downlights with infinite options of sizes, formats, finishes and light angles.

All this and much more in the palm of your hand.



TROOP

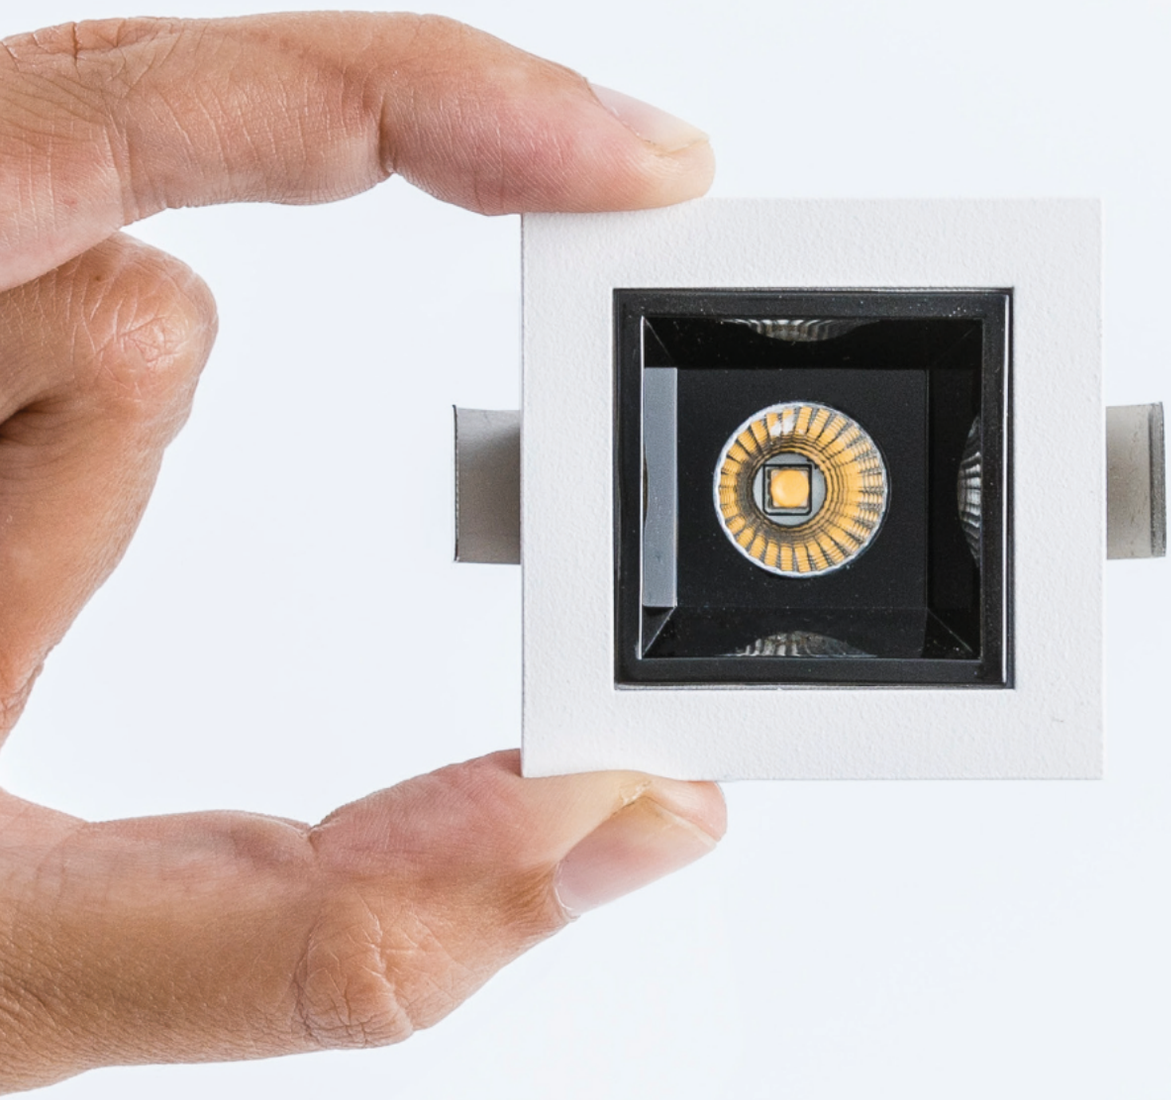



Slight®
slightly different

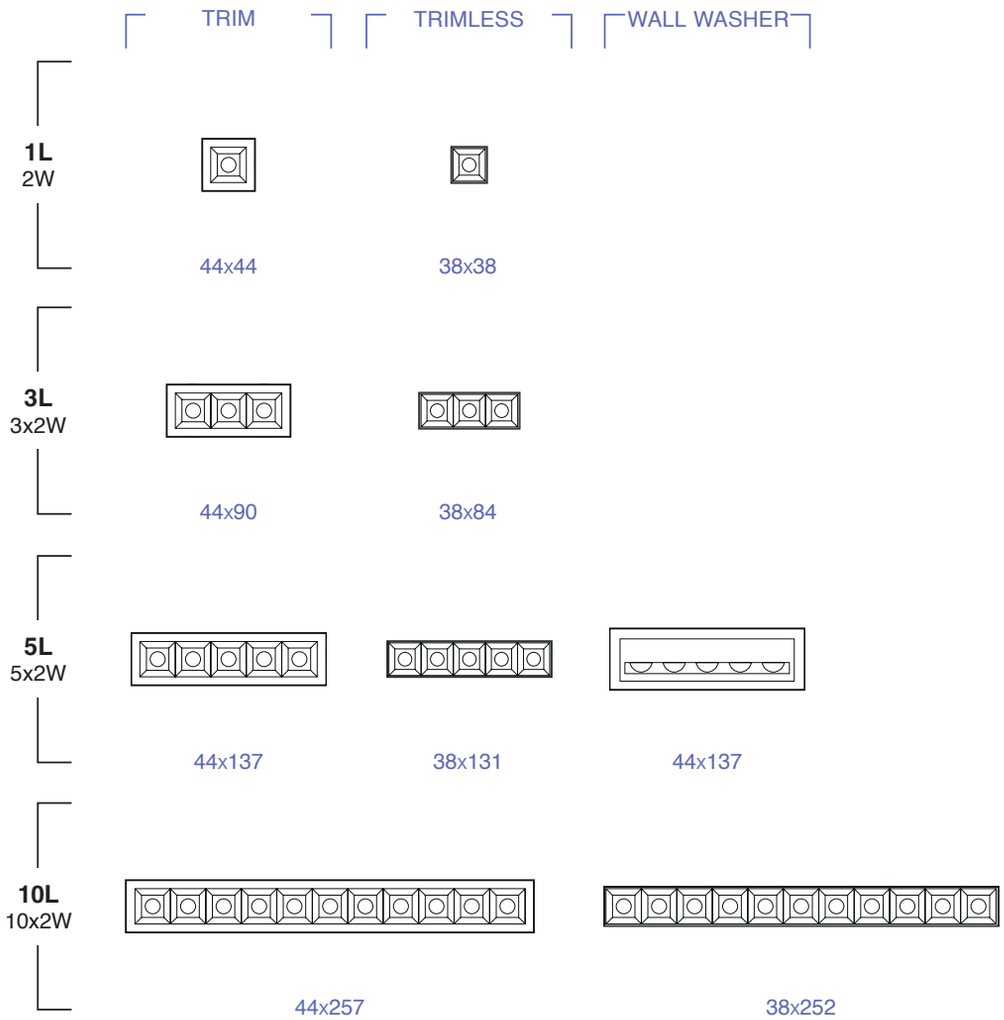

FINISH

- White+Black
- Black+White
- Black+Black
- White+White
- Black+Gold
- White+Gold

COLOR TEMPERATURE

2700K CRI90 | 3000K CRI90 | 4000K CRI90

BEAM ANGLE



CONTROL SYSTEM

DALI | CASAMBI | TRIAC

Highlights

Anti-glare optics

UGR

Reflector with dark light technology

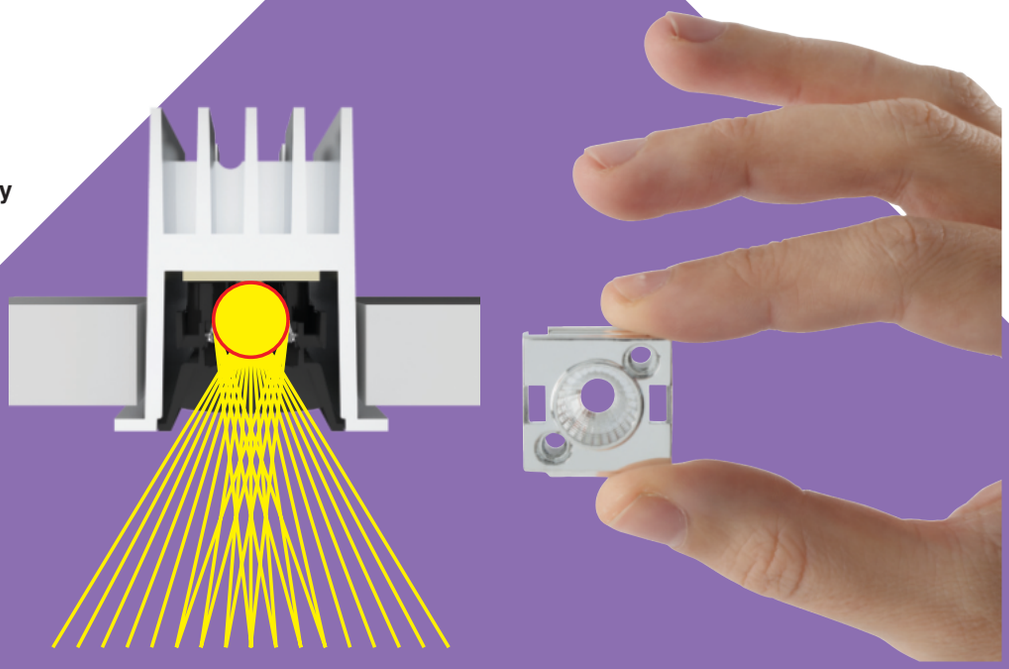



Different sizes & finishes



Linear design with circular light effect



Wall washer version



Several color temperatures



Residential

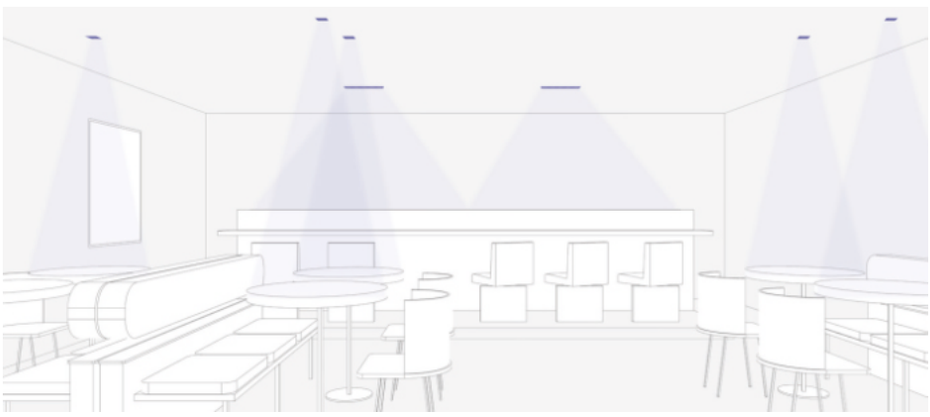

Restaurant

Beam Angle



15°



36°



48°


Slight®
slightly different

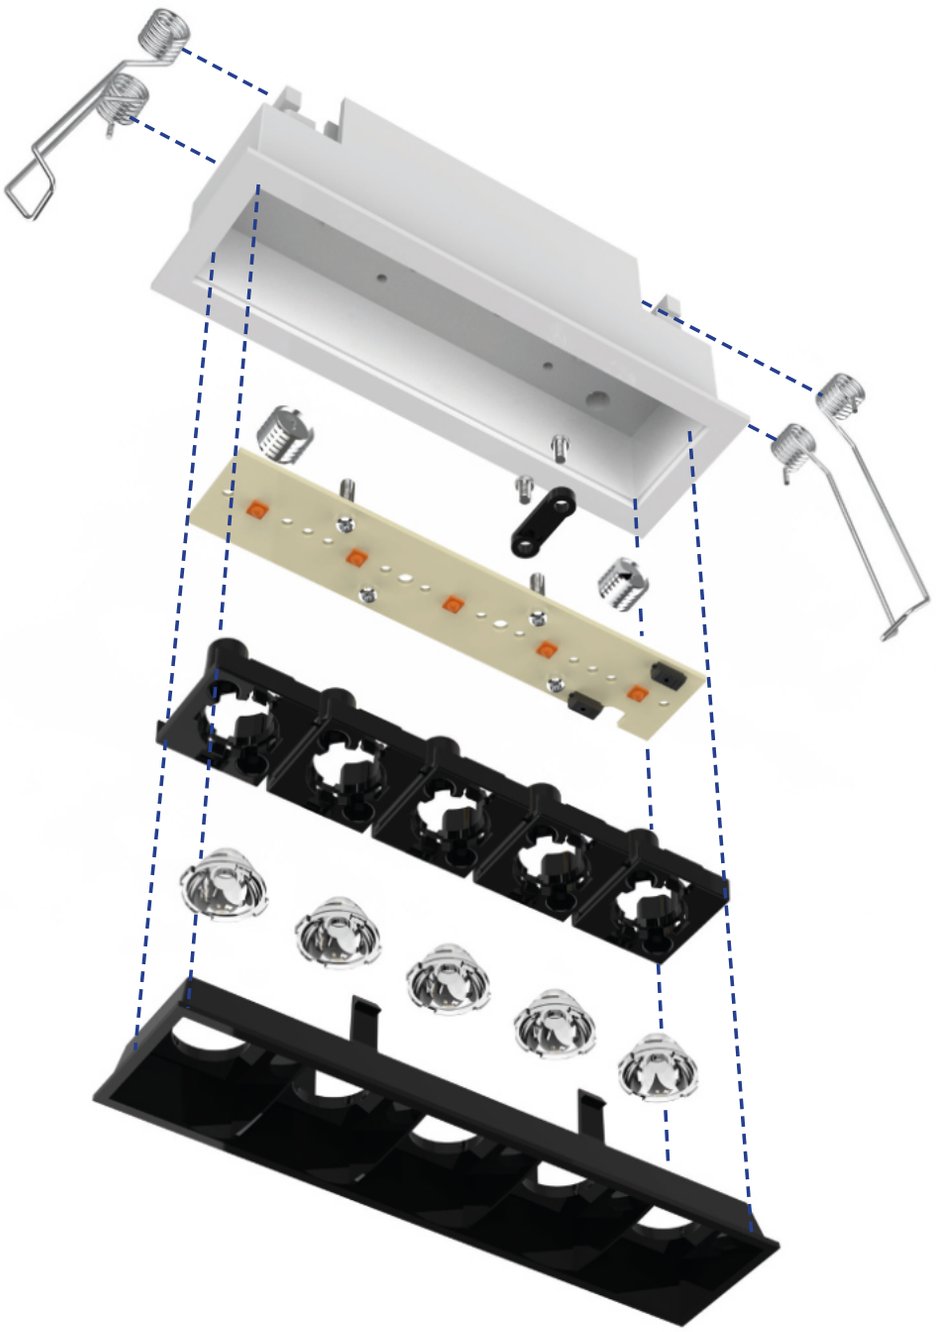

TROOP **1L**

no incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 700mA 2.85V | 650°C | UGR <16











Family		Color T°		Beam Angle		Trim		Anti-Glare	
43700	Troop Trim 2W	**927**	2700K CRI90	**1**	15°	**0**	Trimless	**1**	White
43704	Troop Trimless 2W	**930**	3000K CRI90	**3**	36°	**1**	White	**2**	Black
		940	4000K CRI90	**4**	48°	**2**	Black	**4**	Gold

43700	**927**	**1**	**1**	**1**

Example **43700927111** — Troop Trim 2W 2700K 15° White White



15°



36°



48°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	2W	160lm / 163lm / 166lm	15° / 36° / 48°
930	3000K	90	2W	165lm / 168lm / 171lm	15° / 36° / 48°
940	4000K	90	2W	170lm / 173lm / 176lm	15° / 36° / 48°

TROOP **3L**

no incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 700mA 8.61V | 650°C | UGR <16











Family		Color T°		Beam Angle		Trim		Anti-Glare	
43701	Troop Trim 3x2W	**927**	2700K CRI90	**1**	15°	**0**	Trimless	**1**	White
43705	Troop Trimless 3x2W	**930**	3000K CRI90	**3**	36°	**1**	White	**2**	Black
		940	4000K CRI90	**4**	48°	**2**	Black	**4**	Gold



15°



36°



48°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	3x2W	425lm / 650lm / 493lm	15° / 36° / 48°
930	3000K	90	3x2W	438lm / 670lm / 508lm	15° / 36° / 48°
940	4000K	90	3x2W	451lm / 690lm / 523lm	15° / 36° / 48°

TROOP **5L**

no incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 700mA 14.28V | 650°C | UGR <16









Family		Color T°		Beam Angle		Trim		Anti-Glare	
43702	Troop Trim 5x2W	**927**	2700K CRI90	**1**	15°	**0**	Trimless	**1**	White
43706	Troop Trimless 5x2W	**930**	3000K CRI90	**3**	36°	**1**	White	**2**	Black
		940	4000K CRI90	**4**	48°	**2**	Black	**4**	Gold



15°



36°



48°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	5x2W	672lm / 841lm / 828lm	15° / 36° / 48°
930	3000K	90	5x2W	692lm / 866lm / 853lm	15° / 36° / 48°
940	4000K	90	5x2W	712lm / 891lm / 878lm	15° / 36° / 48°

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

TROOP **WALL WASHER**

no incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 700mA 14.28V | 650°C | UGR <16







Family	Color T°	Beam Angle	Trim	Anti-Glare
43710 Troop Wall Washer 5x2W	**927** 2700K CRI90	**0** Asymmetric	**1** White	**1** White
	930 3000K CRI90		**2** Black	**2** Black
	940 4000K CRI90			



90°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	5x2W	519lm	90°
930	3000K	90	5x2W	535lm	90°
940	4000K	90	5x2W	551lm	90°

TROOP **10L**

no incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 700mA 28.57V | 650ºC | UGR <16









Family		Color T°		Beam Angle		Trim		Anti-Glare	
43703	Troop Trim 10x2W	**927**	2700K CRI90	**1**	15°	**0**	Trimless	**1**	White
43707	Troop Trimless 10x2W	**930**	3000K CRI90	**3**	36°	**1**	White	**2**	Black
		940	4000K CRI90	**4**	48°	**2**	Black	**4**	Gold



15°



36°



48°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	10x2W	1379lm / 1681lm / 1755lm	15° / 36° / 48°
930	3000K	90	10x2W	1422lm / 1733lm / 1809lm	15° / 36° / 48°
940	4000K	90	10x2W	1465lm / 1785lm / 1863lm	15° / 36° / 48°


Slight®
slightly different



CROC is a family of recessed light fixtures available in 3 different sizes: 100 mm, 135 mm and 180 mm.

Its different colour temperature options and its microprismatic optics for glare control make it a perfect option for work zones and spaces dedicated to healthcare.

It has IP44 for humid zones and a low recess height.

Slight®
slightly different

CROC





Slight®
slightly different

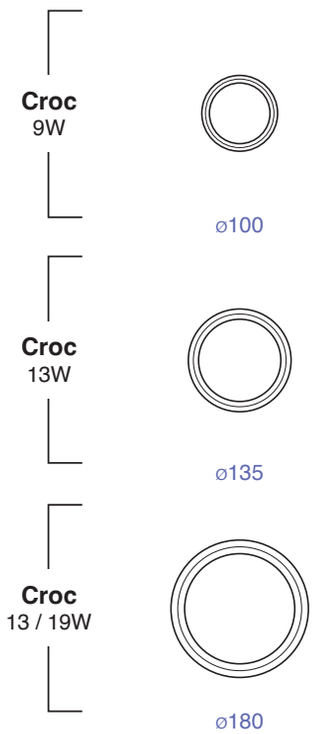

FINISH

○ White

COLOR TEMPERATURE

2700K CRI90 | 3000K CRI90 | 4000K CRI90 | 2700-6500K

BEAM ANGLE

90°

CONTROL SYSTEM

DALI CASAMBI TRIAC

Highlights



Different sizes



Tunable white



Micro-prismatic optics



IP 54/44



Several color temperatures



Slight®
slightly different

CROC **9W**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | IP 54/44 | 220-240V 50/60Hz | 650°C





Family	Color T°	Beam Angle	Finish	Control System
43780 Croc 9W	**927** 2700K CRI90	**9** 90°	**1** White	**W** CASAMBI
	930 3000K CRI90			**D** DALI
	940 4000K CRI90			**C** TRIAC
				ON/OFF

43780	**927**	**9**	**1**	**W**

Example **4378092791W** — Croc 9W 2700K 90° White Casambi



90°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	13W	1070lm	90°
930	3000K	90	13W	1039lm	90°
940	4000K	90	13W	1009lm	90°

CROC **13W**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | IP 54/44 | 220-240V 50/60Hz | 650ºC | UGR <19





Family	Color Tº	Beam Angle	Finish	Control System
43781 Croc 13W	**927** 2700K CRI90	**9** 90°	**1** White	**W** CASAMBI
	930 3000K CRI90			**D** DALI
	940 4000K CRI90			**C** TRIAC
				ON/OFF



90°

Option	Color Tº	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	13W	1495lm	90°
930	3000K	90	13W	1452lm	90°
940	4000K	90	13W	1409lm	90°

CROC **13/19W**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | IP 54/44 | 220-240V 50/60Hz | 650°C





Family	Color T°	Beam Angle	Finish	Control System
43782 Croc 19W **43783** Croc 13W UGR<19	**927** 2700K CRI90 **930** 3000K CRI90 **940** 4000K CRI90	**9** 90°	**1** White	**W** CASAMBI **D** DALI **C** TRIAC ON/OFF
43784 Croc 19W Ø180 N	**TW** 2700-6500K	**9** 90°	**1** White	**W** CASAMBI **D** DALI



90°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	19W	2844lm	90°
930	3000K	90	19W	2762lm	90°
940	4000K	90	19W	2681lm	90°
TW	2000-6500K	90	19W	1773lm	90°
UGR<19					
927	2700K	90	13W	1662lm	90°
930	3000K	90	13W	1665lm	90°
940	4000K	90	13W	1616lm	90°



Slight®
slightly different

The BACKLIGHT panels are the perfect choice for efficiency and illuminating offices in an elegant way.

These recessed panels provide soft and uniform lighting that promotes a comfortable and productive environment.

Their discreet design easily integrates into the aesthetics of any office space.

The uniform lighting they offer helps reduce glare and improve visual quality in the workplace.



BACK LIGHT





Slight®
slightly different

Backlight
1195x295mm
36W



Backlight
595mm
36W



FINISH

○ **White**

COLOR TEMPERATURE

3000K CRI80 **4000K CRI80**

BEAM ANGLE



CONTROL SYSTEM

DALI

Highlights

Thanks to its easy installation and high energy efficiency, this panel becomes the ideal option for providing general lighting in large spaces. With a UGR glare index below 19, it is a perfect choice for office environments.



High Efficiency



Easy Instalation modular ceiling



UGR<19



Office



Hospital

Beam Angle



90°

BACKLIGHT **36W** NEW

incl. DIM 50.000hs L80 / B10 MacAdam 3 220- 240V 50/ 60Hz 650°C UGR <19

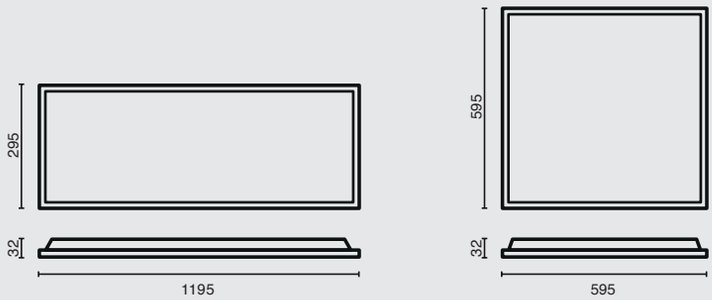

Family		Color T°		Beam Angle		Finish		Control System	
0363	Backlight 1195x295 36W	**830**	3000K CRI80	**9**	90°	**1**	White	**D**	DALI
0364	Backlight 595x595 36W	**840**	4000K CRI80					**W**	CASAMBI
									ON/OFF

0363	**830**	**9**	**1**	**D**

Example **036383091D** — Backlight 1195x295 36W 3000K CRI80 90° White Dali



90°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
830	3000K	80	36W	4499lm	90°
840	4000K	80	36W	4638lm	90°


Slight®
slightly different

Recessed projector with an optical block designed to meet the highest requirements of accent lighting. This product offers an elegant and efficient solution to highlight specific spaces, providing exceptional quality accent lighting.

Its recessed design makes it ideal for discreet integration into various environments, ensuring optimal performance in creating accentuated lighting effects.



Slight®
slightly different


FOST

FOST Collection

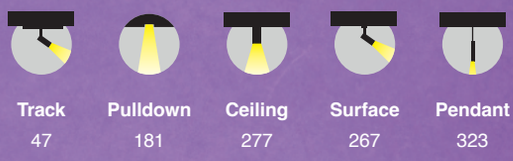

Track	Pulldown	Ceiling	Surface	Pendant
47	181	277	267	323





Slight®
slightly different

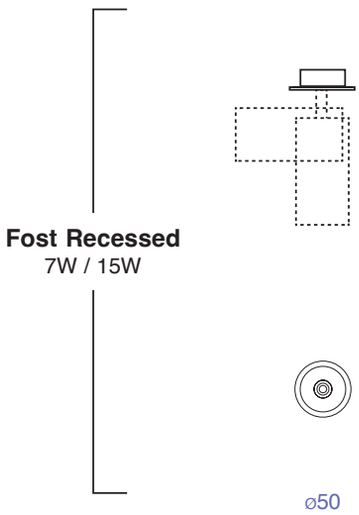

FINISH

● Black ○ White

COLOR TEMPERATURE

2700K CRI90	3000K CRI90	4000K CRI90
2700K CRI97	3000K CRI97	4000K CRI97

BEAM ANGLE



ACCESSORIES



White Ring Copper Ring

CONTROL SYSTEM

DALI CASAMBI

Highlights



Anti-glare



High CRI



Several color temperatures



Slight®
slightly different



White Ring



Copper Ring

Accesories

	White Ring	Copper Ring
ø50	011600099	011600098

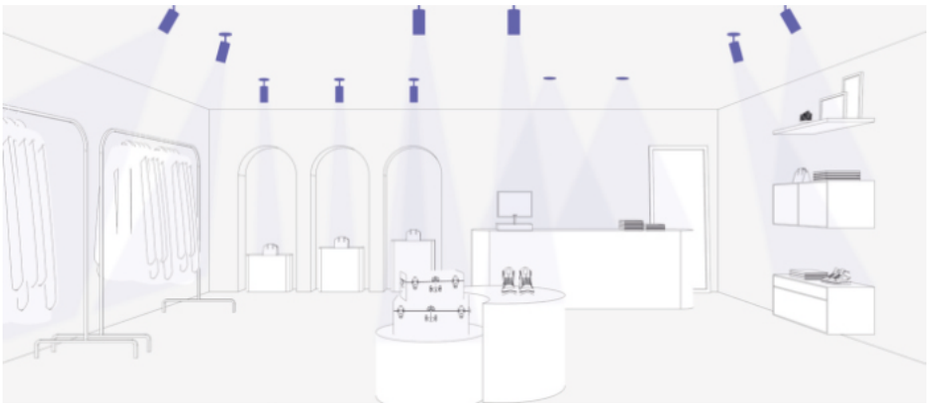

Retail



Restaurant

Beam Angle



12°



20°



35°

FOST **RECESSED** NEW

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C





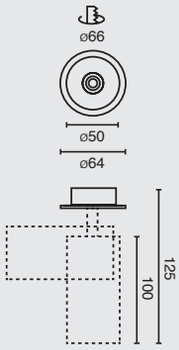

Family	Color T°	Beam Angle	Finish	Control System
0124 Fost Recessed 7W	**927** 2700K CRI90 **930** 3000K CRI90 **940** 4000K CRI90 **X27** 2700K CRI97 **X30** 3000K CRI97 **X40** 4000K CRI97	**1** 12° **2** 20° **3** 35°	**1** White **2** Black	**D** DALI ON/OFF
0125 Fost Recessed 15W	**927** 2700K CRI90 **930** 3000K CRI90 **940** 4000K CRI90 **X27** 2700K CRI97 **X30** 3000K CRI97 **X40** 4000K CRI97	**1** 12° **2** 20° **3** 35°	**1** White **2** Black	**W** CASAMBI **D** DALI ON/OFF

0125 **927** **1** **1** **W**

Example **012592711W** — Fost Recessed 15W 2700K CRI90 12° White Casambi



12°



20°



35°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	7W	641lm / 608lm / 618lm	15°/25°/35°
x27		97	7W	583lm / 553lm / 562lm	15°/25°/35°
930	3000K	90	7W	661lm / 626lm / 636lm	15°/25°/35°
x30		97	7W	601lm / 569lm / 578lm	15°/25°/35°
940	4000K	90	7W	680lm / 645lm / 655lm	15°/25°/35°
x40		97	7W	619lm / 586lm / 596lm	15°/25°/35°
927	2700K	90	15W	1026lm / 973lm / 988lm	12° / 20° / 35°
X27		97	15W	933lm / 884lm / 899lm	12° / 20° / 35°
930	3000K	90	15W	1057lm / 1002lm / 1018lm	12° / 20° / 35°
X30		97	15W	961lm / 911lm / 925lm	12° / 20° / 35°
940	4000K	90	15W	1089lm / 1032lm / 1049lm	12° / 20° / 35°
X40		97	15W	990lm / 938lm / 953lm	12° / 20° / 35°

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch



Slight®
slightly different



Recessed light fixture designed to fulfill the downlight function with the possibility to be converted into a 100% functional projector thanks to its optical block extraction system, enabling it to meet the highest requirements of accent lighting.

This characteristic grants FOST PULLDOWN a flexibility suitable for any multifunctIonal spaces that require its adaptation or modification from a fixed point.

Slight®
slightly different

FOST



FOST Collection



Track	Recessed	Ceiling	Surface	Pendant
47	171	277	267	323





Slight®
slightly different

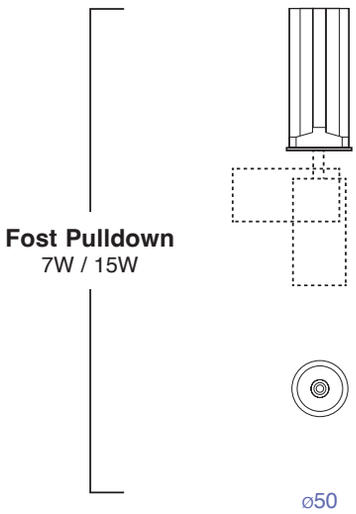

FINISH

● Black ○ White

COLOR TEMPERATURE

2700K CRI90	3000K CRI90	4000K CRI90
2700K CRI97	3000K CRI97	4000K CRI97

BEAM ANGLE



ACCESSORIES



White Ring Copper Ring

CONTROL SYSTEM

DALI CASAMBI

Highlights



Its extraction system enables the block to be positioned at different heights without limiting creativity, creating a decorative geometric effect while lighting the space.



Consider the installation height in your project



High CRI



Several color temperatures


Slight®
slightly different



White Ring



Copper Ring

Accesories

	White Ring	Copper Ring
ø50	011600099	011600098

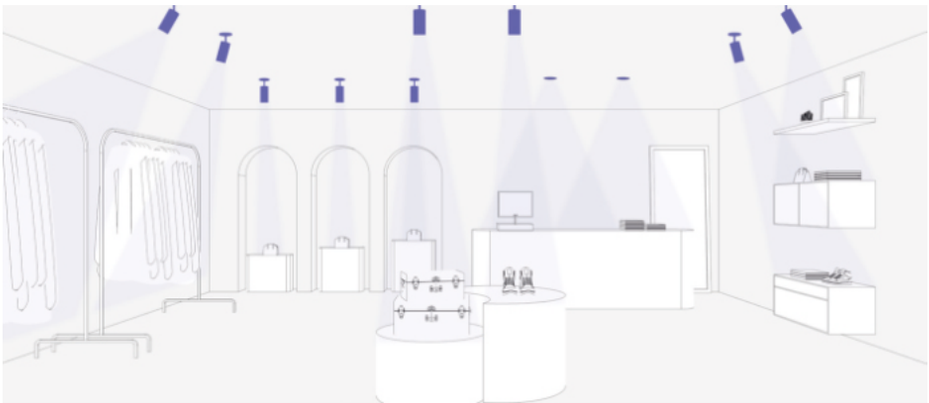

Retail

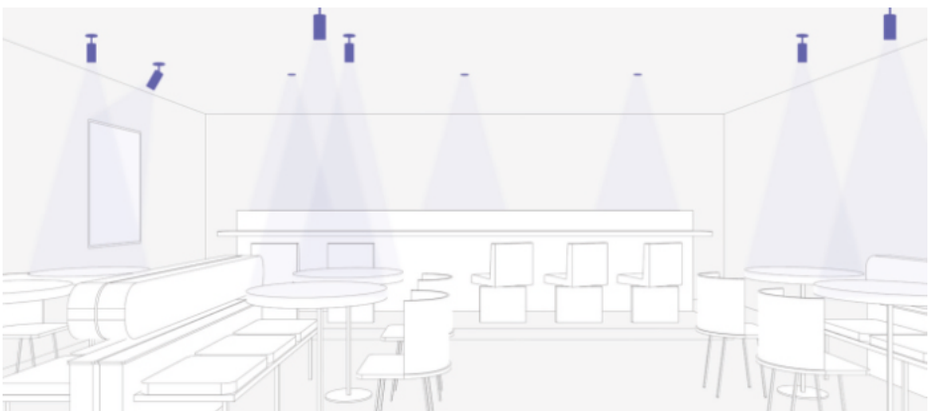

Restaurant

Beam Angle



12°



20°



35°

FOST **PULLDOWN**

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0123 Fost Pulldown 7W N	**927** 2700K CRI90 **930** 3000K CRI90 **940** 4000K CRI90 **X27** 2700K CRI97 **X30** 3000K CRI97 **X40** 4000K CRI97	**1** 12° **2** 20° **3** 35°	**1** White **2** Black	**D** DALI ON/OFF
0122 Fost Pulldown 15W	**927** 2700K CRI90 **930** 3000K CRI90 **940** 4000K CRI90 **X27** 2700K CRI97 **X30** 3000K CRI97 **X40** 4000K CRI97	**1** 12° **2** 20° **3** 35°	**1** White **2** Black	**W** CASAMBI **D** DALI ON/OFF
0122	**927**	**1**	**1**	**W**

Example **012292711W** — Fost Pulldown 15W 2700K CRI90 12° White Casambi



12°



20°



35°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	7W	1026lm / 973lm / 988lm	15°/25°/35°
x27		97	7W	933lm / 884lm / 899lm	15°/25°/35°
930	3000K	90	7W	1057lm / 1002lm / 1018lm	15°/25°/35°
x30		97	7W	961lm / 911lm / 925lm	15°/25°/35°
940	4000K	90	7W	1089lm / 1032lm / 1049lm	15°/25°/35°
x40		97	7W	990lm / 938lm / 953lm	15°/25°/35°
927	2700K	90	15W	641lm / 608lm / 618lm	12° / 20° / 35°
X27		97	15W	583lm / 553lm / 562lm	12° / 20° / 35°
930	3000K	90	15W	661lm / 626lm / 636lm	12° / 20° / 35°
X30		97	15W	601lm / 569lm / 578lm	12° / 20° / 35°
940	4000K	90	15W	680lm / 645lm / 655lm	12° / 20° / 35°
X40		97	15W	619lm / 586lm / 596lm	12° / 20° / 35°



Slight®
slightly different

Size does matter.

UNO has a design that is small in dimension and a large capacity to create environments with light with minimum visual invasion, both in the space and on the recess surface.



Slight®
slightly different

UNO



Slight®
slightly different

	TRIM	TRIMLESS	PROJECTOR PULLDOWN
Uno 8W			
	ø50	ø36	ø55

FINISH

- White+Black
- Black+White
- Black+Black
- White+White
- Black+Gold
- White+Gold

COLOR TEMPERATURE

2700K CRI90 | 3000K CRI90

BEAM ANGLE



ACCESSORIES



Honeycomb

CONTROL SYSTEM

DALI

Highlights



The size/flow ratio of its downlight and extractable projector versions makes it possible to fulfill the requirements needed for applications in hotels, restaurants and retail, as well as its domestic application.



Passive heat dissipation system



Glare control



Removable downlight module



Several color temperatures

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch



Slight®
slightly different



Honeycomb

Accesories

Honeycomb
35300099

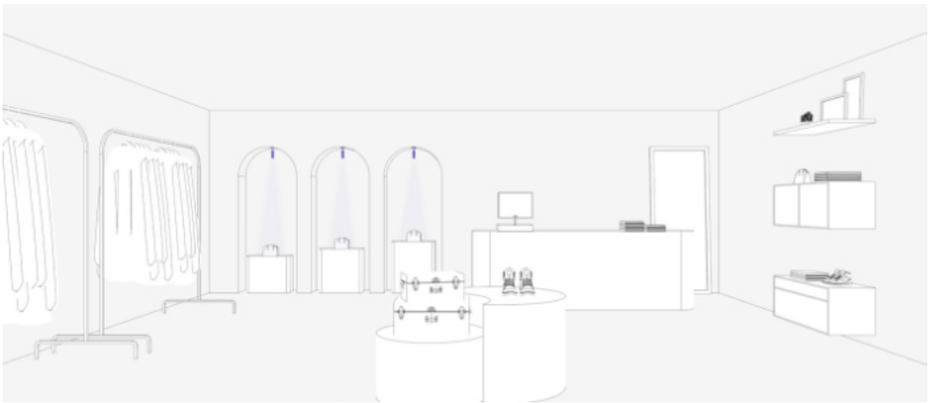

Retail

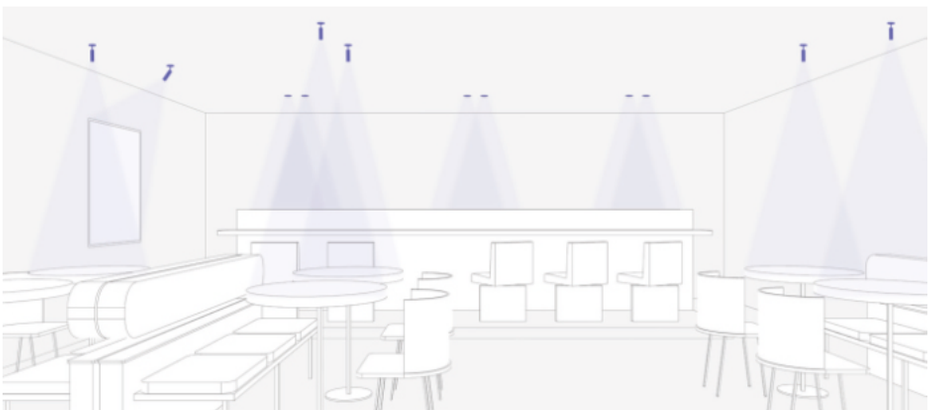

Restaurant



Residential

Beam Angle



11°



24°



37°

UNO DOWNLIGHT **8W**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C











Family		Color T°		Beam Angle		Finish		Ring		Control System	
0331	Uno Trim 8W	927	2700K CRI90	1	11°	1	White	1	White	D	DALI
0332	Uno Trimless 8W	930	3000K CRI90	2	24°	2	Black	2	Black		ON/OFF
				3	37°			4	Gold		

0331	927	1	1	1	D

Example **0331927111W** — Uno trim 8W 2700K CRI90 11° White, White Ring Dali



11°



24°



37°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	8W	347lm / 346lm / 331lm	11° / 24° / 37°
930	3000K	90	8W	358lm / 357lm / 341lm	11° / 24° / 37°

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

UNO **PULLDOWN PROJECTOR 8W**

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Ring	Control System
0333 Uno Pulldown 8W	**927** 2700K CRI90	**1** 11°	**1** White	**1** White	**D** DALI
	930 3000K CRI90	**2** 24°	**2** Black	**2** Black	ON/OFF
		3 37°		**4** Gold	



11°



24°



37°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	8W	347lm / 346lm / 331lm	11° / 24° / 37°
930	3000K	90	8W	358lm / 357lm / 341lm	11° / 24° / 37°

TEIDE is a modular system of recessed light fixtures which stands out for its great versatility, high visual comfort and the orientability of its modules.

Minimalist in design, it offers a broad integration with architecture, ideal for residential and retail use. Committed to lighting excellence with CRI97 and 2 MacAdam options.



Slight®
slightly different

TEIDE



Slight®
slightly different

MODULE

6 / 11W





DOWNLIGHT



ø77

FRAME

Trim



98x98



98x185



98x272

Trimless



78x78



78x165



78x252

FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90	**3000K CRI90**
2700K CRI97	**3000K CRI97**

BEAM ANGLE

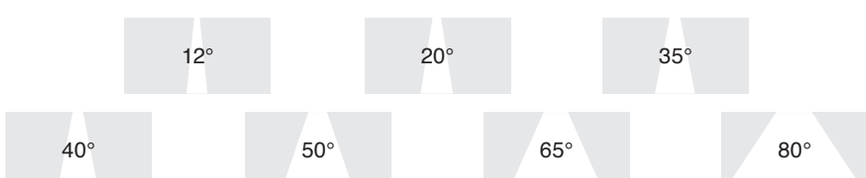

CONTROL SYSTEM

DALI

Highlights

Teide system





Module Downlight

Projector



Trim 1L | Trim 2L | Trim 3L | Trimless 1L | Trimless 2L | Trimless 3L

The system consists of a round downlight module and a spotlight module that can be combined in square/rectangular recessed frames with 1, 2 and 3 lights (also available in frameless version). The downlight module is also available in a round hole installation version, TEIDE Downlight.



Pulldown projector module

Teide downlight

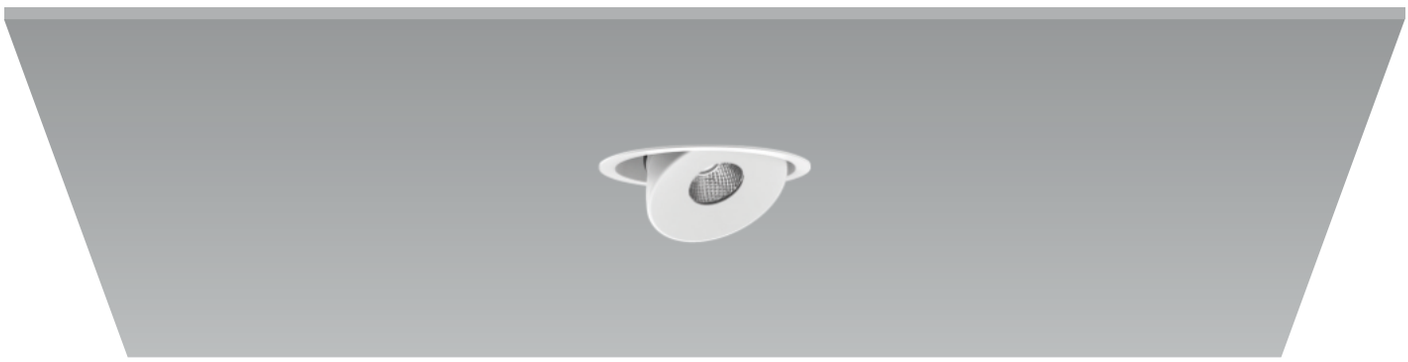



Orientation without light loss



Trim 1L





Trim 2L





Trim 3L





Trimless 1L





Trimless 2L





Trimless 3L



Frames

Trim 1L	Trim 2L	Trim 3L	Trimless 1L	Trimless 2L	Trimless 3L
● 034600011	● 034600021	● 034600031	● 034700011	● 034700021	● 034700031
● 034600012	● 034600022	● 034600032	● 034700012	● 034700022	● 034700032

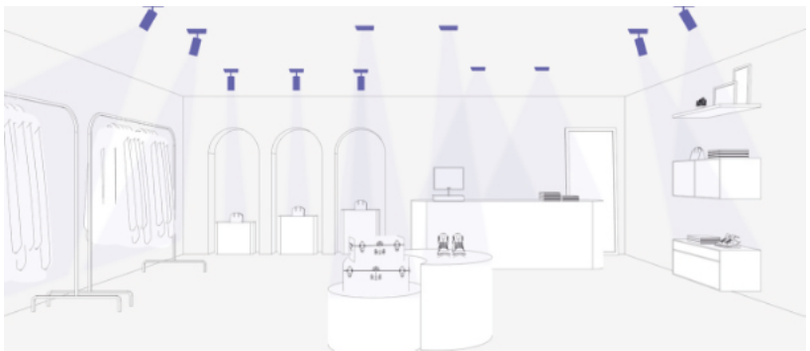

Retail



Restaurant



Residential

Beam Angle Downlight



40°



50°



65°



80°

Beam Angle Projector



12°



20°



35°

TEIDE **PROJECTOR MODULE**

incl. | DIM | 355° | 80° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0349 Teide Projector Module 9W	**927** 2700K CRI90 **930** 3000K CRI90 **X27** 2700K CRI97 **X30** 3000K CRI97	**1** 12° **2** 20° **3** 35°	**1** White **2** Black	**D** DALI ON/OFF

0349	**927**	**1**	**1**	**W**

Example **034992711D** — Teide Projector Module 9W 2700K CRI90 12° White Dali



12°



20°



35°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	9W	741lm / 754lm / 782lm	12° / 20° / 35°
X27		97	9W	667lm / 678lm / 703lm	12° / 20° / 35°
930	3000K	90	9W	764lm / 777lm / 806lm	12° / 20° / 35°
X30		97	9W	687lm / 699lm / 725lm	12° / 20° / 35°


Slight®
slightly different

TEIDE **DOWNLIGHT MODULE**

incl. | DIM | 355° | 45° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0352 Teide Downlight Module 10W	**927** 2700K CRI90 **930** 3000K CRI90 **X27** 2700K CRI97 **X30** 3000K CRI97	**4** 40° **5** 50° **6** 65° **8** 80°	**1** White **2** Black	**D** DALI ON/OFF



40°



50°



65°



80°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	10W	774lm / 769lm / 783lm / 812lm	40° / 50° / 65° / 80°
X27		97	10W	697lm / 692lm / 704lm / 731lm	40° / 50° / 65° / 80°
930	3000K	90	10W	798lm / 793lm / 807lm / 837lm	40° / 50° / 65° / 80°
X30		97	10W	718lm / 714lm / 726lm / 753lm	40° / 50° / 65° / 80°

TEIDE **DOWNLIGHT**

incl. | DIM | 355° | 45° | 50.000hs L70 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0348 Teide Downlight 10W	**927** 2700K CRI90	**4** 40°	**1** White	**D** DALI
	930 3000K CRI90	**5** 50°	**2** Black	ON/OFF
	X27 2700K CRI97	**6** 65°		
	X30 3000K CRI97	**8** 80°		



40°



50°



65°



80°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	10W	774lm / 769lm / 783lm / 812lm	40° / 50° / 65° / 80°
X27		97	10W	697lm / 692lm / 704lm / 731lm	40° / 50° / 65° / 80°
930	3000K	90	10W	798lm / 793lm / 807lm / 837lm	40° / 50° / 65° / 80°
X30		97	10W	718lm / 714lm / 726lm / 753lm	40° / 50° / 65° / 80°

TULIPA is the ideal solution when light quality and great visual comfort are needed.

Downlight with aluminium injection frame and high-quality finishes which, thanks to its cut-off and its integrated honeycomb, guarantees maximum visual comfort.







Slight®
slightly different

TULIPA





Slight®
slightly different

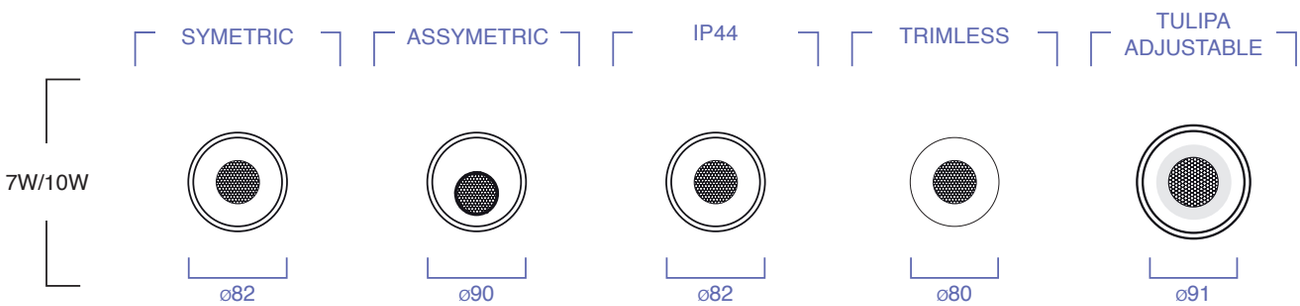

FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90 **3000K CRI90** **4000K CRI90**

BEAM ANGLE

15° 24° 36° 55°

ACCESSORIES

Supplementary White Ring

Supplementary Black Ring

CONTROL SYSTEM

DALI CASAMBI TRIAC

Highlights

Optical block formed by a secondary aluminium injection reflector which at the same time functions as a recess ring, integrated honeycomb, along with a high-purity PMMA lens.



Built-in Honeycomb



Symmetric / Asymmetric / Adjustable



Simple clipping system



Optional IP44



High CRI



Several color temperatures


Slight®
slightly different



Supplementary White Ring

ø96 supplementary ring



Supplementary Black Ring

ø96 supplementary ring

Accesories

Supplementary White Ring	Supplementary Black Ring
033500098	033500099



Residential



Office



Restaurant

Beam Angle



15°



24°



36°



55°

TULIPA

incl. DIM 50.000hs L80 / B10 MacAdam 3 220-240V 50 / 60Hz 650°C













Family		Power		Color T°		Beam Angle		Finish		Control System	
0335	Tulipa Trim	1	7W 350mA	927	2700K CRI90	1	15°	1	White	W	CASAMBI
0337	Tulipa Trim IP44	2	10W 500mA	930	3000K CRI90	2	24°	2	Black	D	DALI
0338	Tulipa Trimless			940	4000K CRI90	3	36°			C	TRIAC
						5	55°				ON/OFF

0335	1	927	1	1	W

Example **0335192711W** — Tulipa trim 7W 350mA 2700K CRI95 15° White Casambi



15°



24°



36°



55°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
0335 / 0337 / 0338	2700K	90	7W 350mA	355lm / 387lm / 406lm / 313lm	15° / 24° / 36° / 55°
		90	10W 500mA	504lm / 550lm / 577lm / 445lm	15° / 24° / 36° / 55°
0335 / 0337 / 0338	3000K	90	7W 350mA	366lm / 399lm / 419lm / 323lm	15° / 24° / 36° / 55°
		90	10W 500mA	520lm / 567lm / 595lm / 459lm	15° / 24° / 36° / 55°
0335 / 0337 / 0338	4000K	90	7W 350mA	377lm / 411lm / 432lm / 333lm	15° / 24° / 36° / 55°
		90	10W 500mA	535lm / 584lm / 613lm / 472lm	15° / 24° / 36° / 55°

TULIPA **ASYMMETRIC**

incl. DIM 50.000hs L80 / B10 MacAdam 3 220-240V 50 / 60Hz 650°C







Family	Power	Color T°	Beam Angle	Finish	Control System
0336 Tulipa Asymmetric	**1** 7W 350mA	**927** 2700K CRI90	**1** 15°	**1** White	**W** CASAMBI
	2 10W 500mA	**930** 3000K CRI90	**2** 24°	**2** Black	**D** DALI
		940 4000K CRI90	**3** 36°		**C** TRIAC
			5 55°		ON/OFF



*15°



*24°



*36°



*55°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
0336	2700K	90	7W 350mA	333lm / 377lm / 465lm / 320lm	15° / 24° / 36° / 55°
		90	10W 500mA	472lm / 536lm / 660lm / 455lm	15° / 24° / 36° / 55°
0336	3000K	90	7W 350mA	343lm / 389lm / 479lm / 330lm	15° / 24° / 36° / 55°
		90	10W 500mA	487lm / 552lm / 680lm / 469lm	15° / 24° / 36° / 55°
0336	4000K	90	7W 350mA	353lm / 401lm / 493lm / 340lm	15° / 24° / 36° / 55°
		90	10W 500mA	502lm / 569lm / 701lm / 483lm	15° / 24° / 36° / 55°

TULIPA ADJUSTABLE

NEW

incl. | DIM | 25° | 50.000hs L80 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Power	Color T°	Beam Angle	Finish	Control System
0339 Tulipa adjustable	**1** 7W 350mA	**927** 2700K CRI90	**1** 15°	**1** White	**W** CASAMBI
	2 10W 500mA	**930** 3000K CRI90	**2** 24°	**2** Black	**D** DALI
		940 4000K CRI90	**3** 36°		**C** TRIAC
			5 55°		ON/OFF



15°



24°



36°



55°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
0339	2700K	90	7W 350mA	355lm / 387lm / 406lm / 313lm	15° / 24° / 36° / 55°
		90	10W 500mA	504lm / 550lm / 577lm / 445lm	15° / 24° / 36° / 55°
0339	3000K	90	7W 350mA	366lm / 399lm / 419lm / 323lm	15° / 24° / 36° / 55°
		90	10W 500mA	520lm / 567lm / 595lm / 459lm	15° / 24° / 36° / 55°
0339	4000K	90	7W 350mA	377lm / 411lm / 432lm / 333lm	15° / 24° / 36° / 55°
		90	10W 500mA	535lm / 584lm / 613lm / 472lm	15° / 24° / 36° / 55°


Slight®
slightly different

PODIUM is a modular system of recessed and surface light fixtures which offers different light effects and configurations, enabling the creation of different climates with an integrated aesthetic. One product, one project, infinite possibilities.



Slight®
slightly different



PODIUM

Podium Collection

Surface
299



MODULE

DFG

13W



DFA

15W



DFB



DOA



PROJECTOR

8W



FRAME

Trim



115x115



115x206



115x297

Trimless



134x134



134x225



134x315

FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI97	**3000K CRI97**	**4000K CRI97**
2700K CRI90	**3000K CRI90**	**4000K CRI90**

BEAM ANGLE

15° | 24 / 25° | 35° / 38° | 60° | 90° | 110°

ACCESSORIES



Honeycomb



Striped glass



Diffusion sheet

CONTROL SYSTEM

DALI CASAMBI TRIAC

Highlights

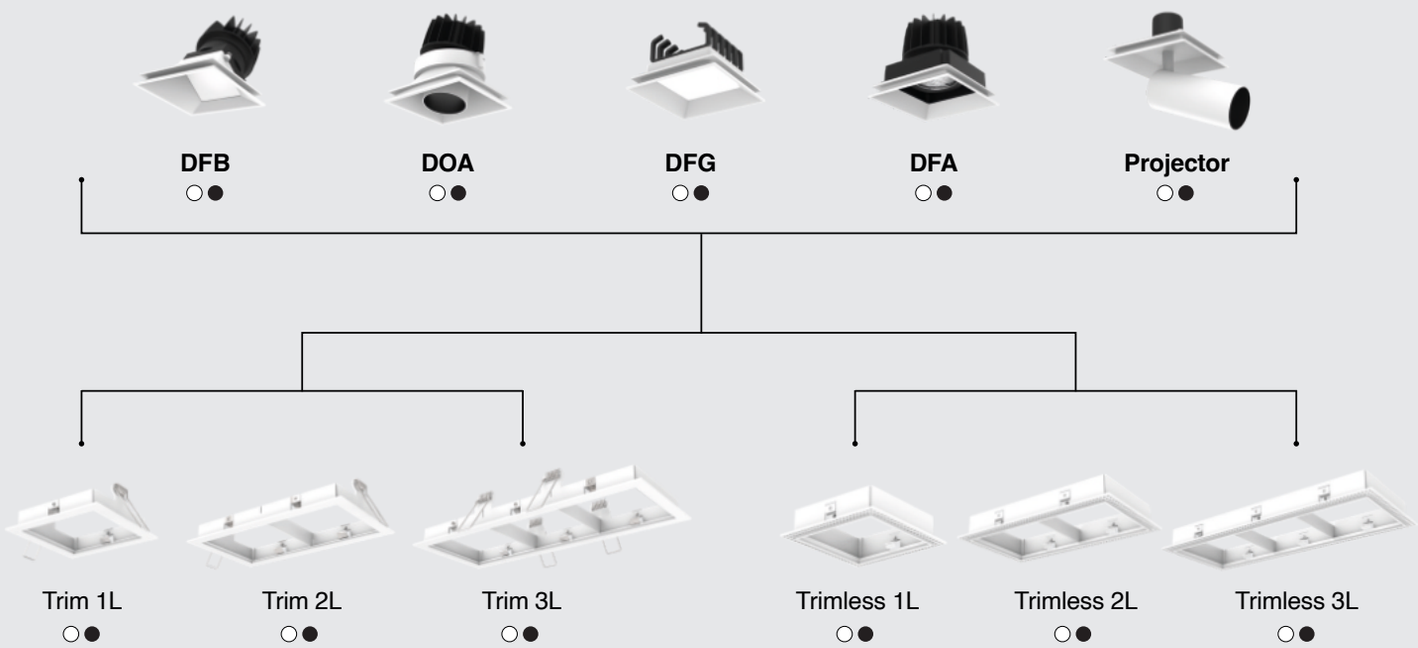

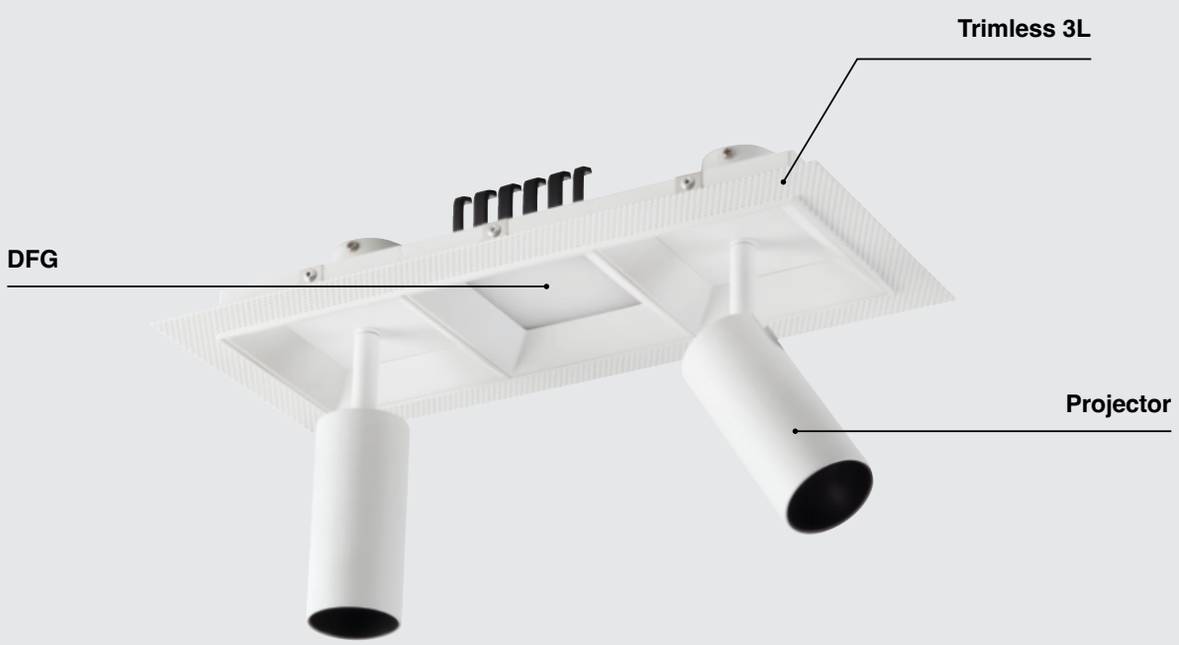

The recessed system has options with and without a frame of 1, 2 and 3 lights, making it possible to combine general, downlight, fixed and orientable accent and projector lighting optics into one product. The family is offered in 3 colour temperatures and high CRI.

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

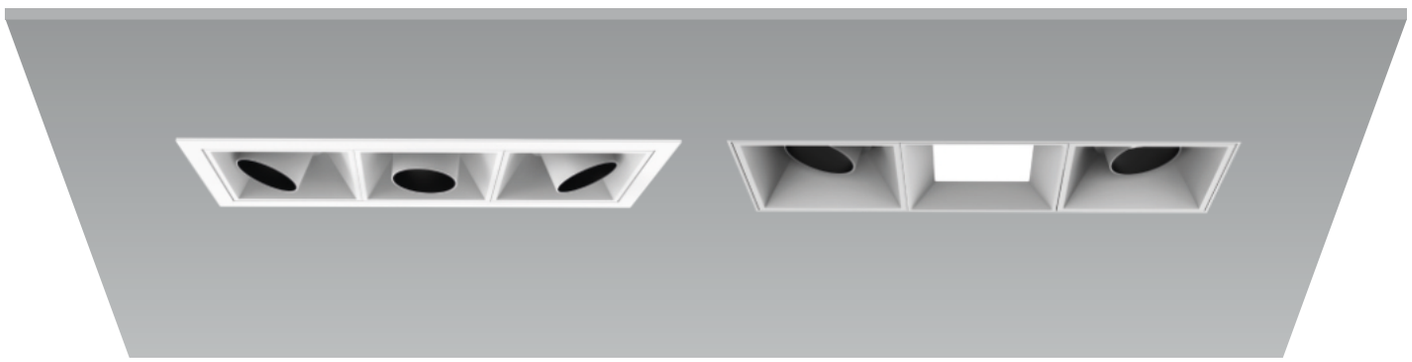





















Trim 1L





Trim 2L





Trim 3L





Trimless 1L





Trimless 2L





Trimless 3L





Honeycomb



Stripped Glass



Diffusion Sheet

Frames

Trim 1L	Trim 2L	Trim 3L	Trimless 1L	Trimless 2L	Trimless 3L
● 034100011	● 034100021	● 034100031	● 034200011	● 034200021	● 034200031
● 034100012	● 034100022	● 034100032	● 034200012	● 034200022	● 034200032

Accessories
for DFA&DOA

Honeycomb	Stripped Glass	Diffusion sheet
034100098	034100097	034100099



Residential



Restaurant

Beam Angle



15°



24/25°



35/38°



60°



90°



110°

PODIUM **DFA MODULE**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0341 Podium DFA Module 15W	**927** 2700K CRI97 **930** 3000K CRI97 **940** 4000K CRI97	**1** 15° **2** 24° **3** 38° **6** 60°	**1** White **2** Black	**W** CASAMBI **D** DALI **C** TRIAC ON/OFF

0341 **927** **1** **1** **W**

Example **034192711W** — Podium DFA 15W 2700K CRI97 15° White Casambi



15°



24°



38°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
X27	2700K	97	15W	1121lm / 1026lm / 1036lm / 1060lm	15° / 24° / 38° / 60°
X30	3000K	97	15W	1156lm / 1058lm / 1068lm / 1093lm	15° / 24° / 38° / 60°
X40	4000K	97	15W	1191lm / 1090lm / 1100lm / 1126lm	15° / 24° / 38° / 60°

PODIUM **DOA MODULE**

incl. | DIM | 355° | 20° | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0342 Podium DOA Module 15W	**927** 2700K CRI97	**1** 15°	**1** White	**W** CASAMBI
	930 3000K CRI97	**2** 24°	**2** Black	**D** DALI
	940 4000K CRI97	**3** 38°		**C** TRIAC
		6 60°		ON/OFF



15°



24°



38°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
X27	2700K	97	15W	435lm / 439lm / 448lm / 456lm	15° / 24° / 38° / 60°
X30	3000K	97	15W	448lm / 453lm / 462lm / 470lm	15° / 24° / 38° / 60°
X40	4000K	97	15W	461lm / 467lm / 476lm / 484lm	15° / 24° / 38° / 60°

PODIUM **DFB MODULE**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0344 Podium DFB Module 15W	**927** 2700K CRI97 **930** 3000K CRI97 **940** 4000K CRI97	**9** 90°	**1** White **2** Black	**W** CASAMBI **D** DALI **C** TRIAC ON/OFF



90°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
X27	2700K	97	15W	228lm	90°
X30	3000K	97	15W	235lm	90°
X40	4000K	97	15W	242lm	90°


Slight®
slightly different

PODIUM **PROJECTOR MODULE**

incl. | DIM | 355° | 90° | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0345 Podium Projector Module 8W	**927** 2700K CRI97 **930** 3000K CRI97 **940** 4000K CRI97	**1** 15° **2** 25°	**1** White **2** Black	**W** CASAMBI **D** DALI **C** TRIAC ON/OFF



15°



25°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
X27	2700K	97	8W	273lm / 273lm	15° / 25°
X30	3000K	97	8W	281lm/ 281lm	15° / 25°
X40	4000K	97	8W	289lm / 289lm	15° / 25°

PODIUM **DFG MODULE**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0343 Podium DFG Module 13W	**927** 2700K CRI90 **930** 3000K CRI90 **940** 4000K CRI90	**0** 110°	**1** White **2** Black	**W** CASAMBI **D** DALI **C** TRIAC **ON/OFF**



110°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	13W	648lm	110°
930	3000K	90	13W	668lm	110°
940	4000K	90	13W	688lm	110°

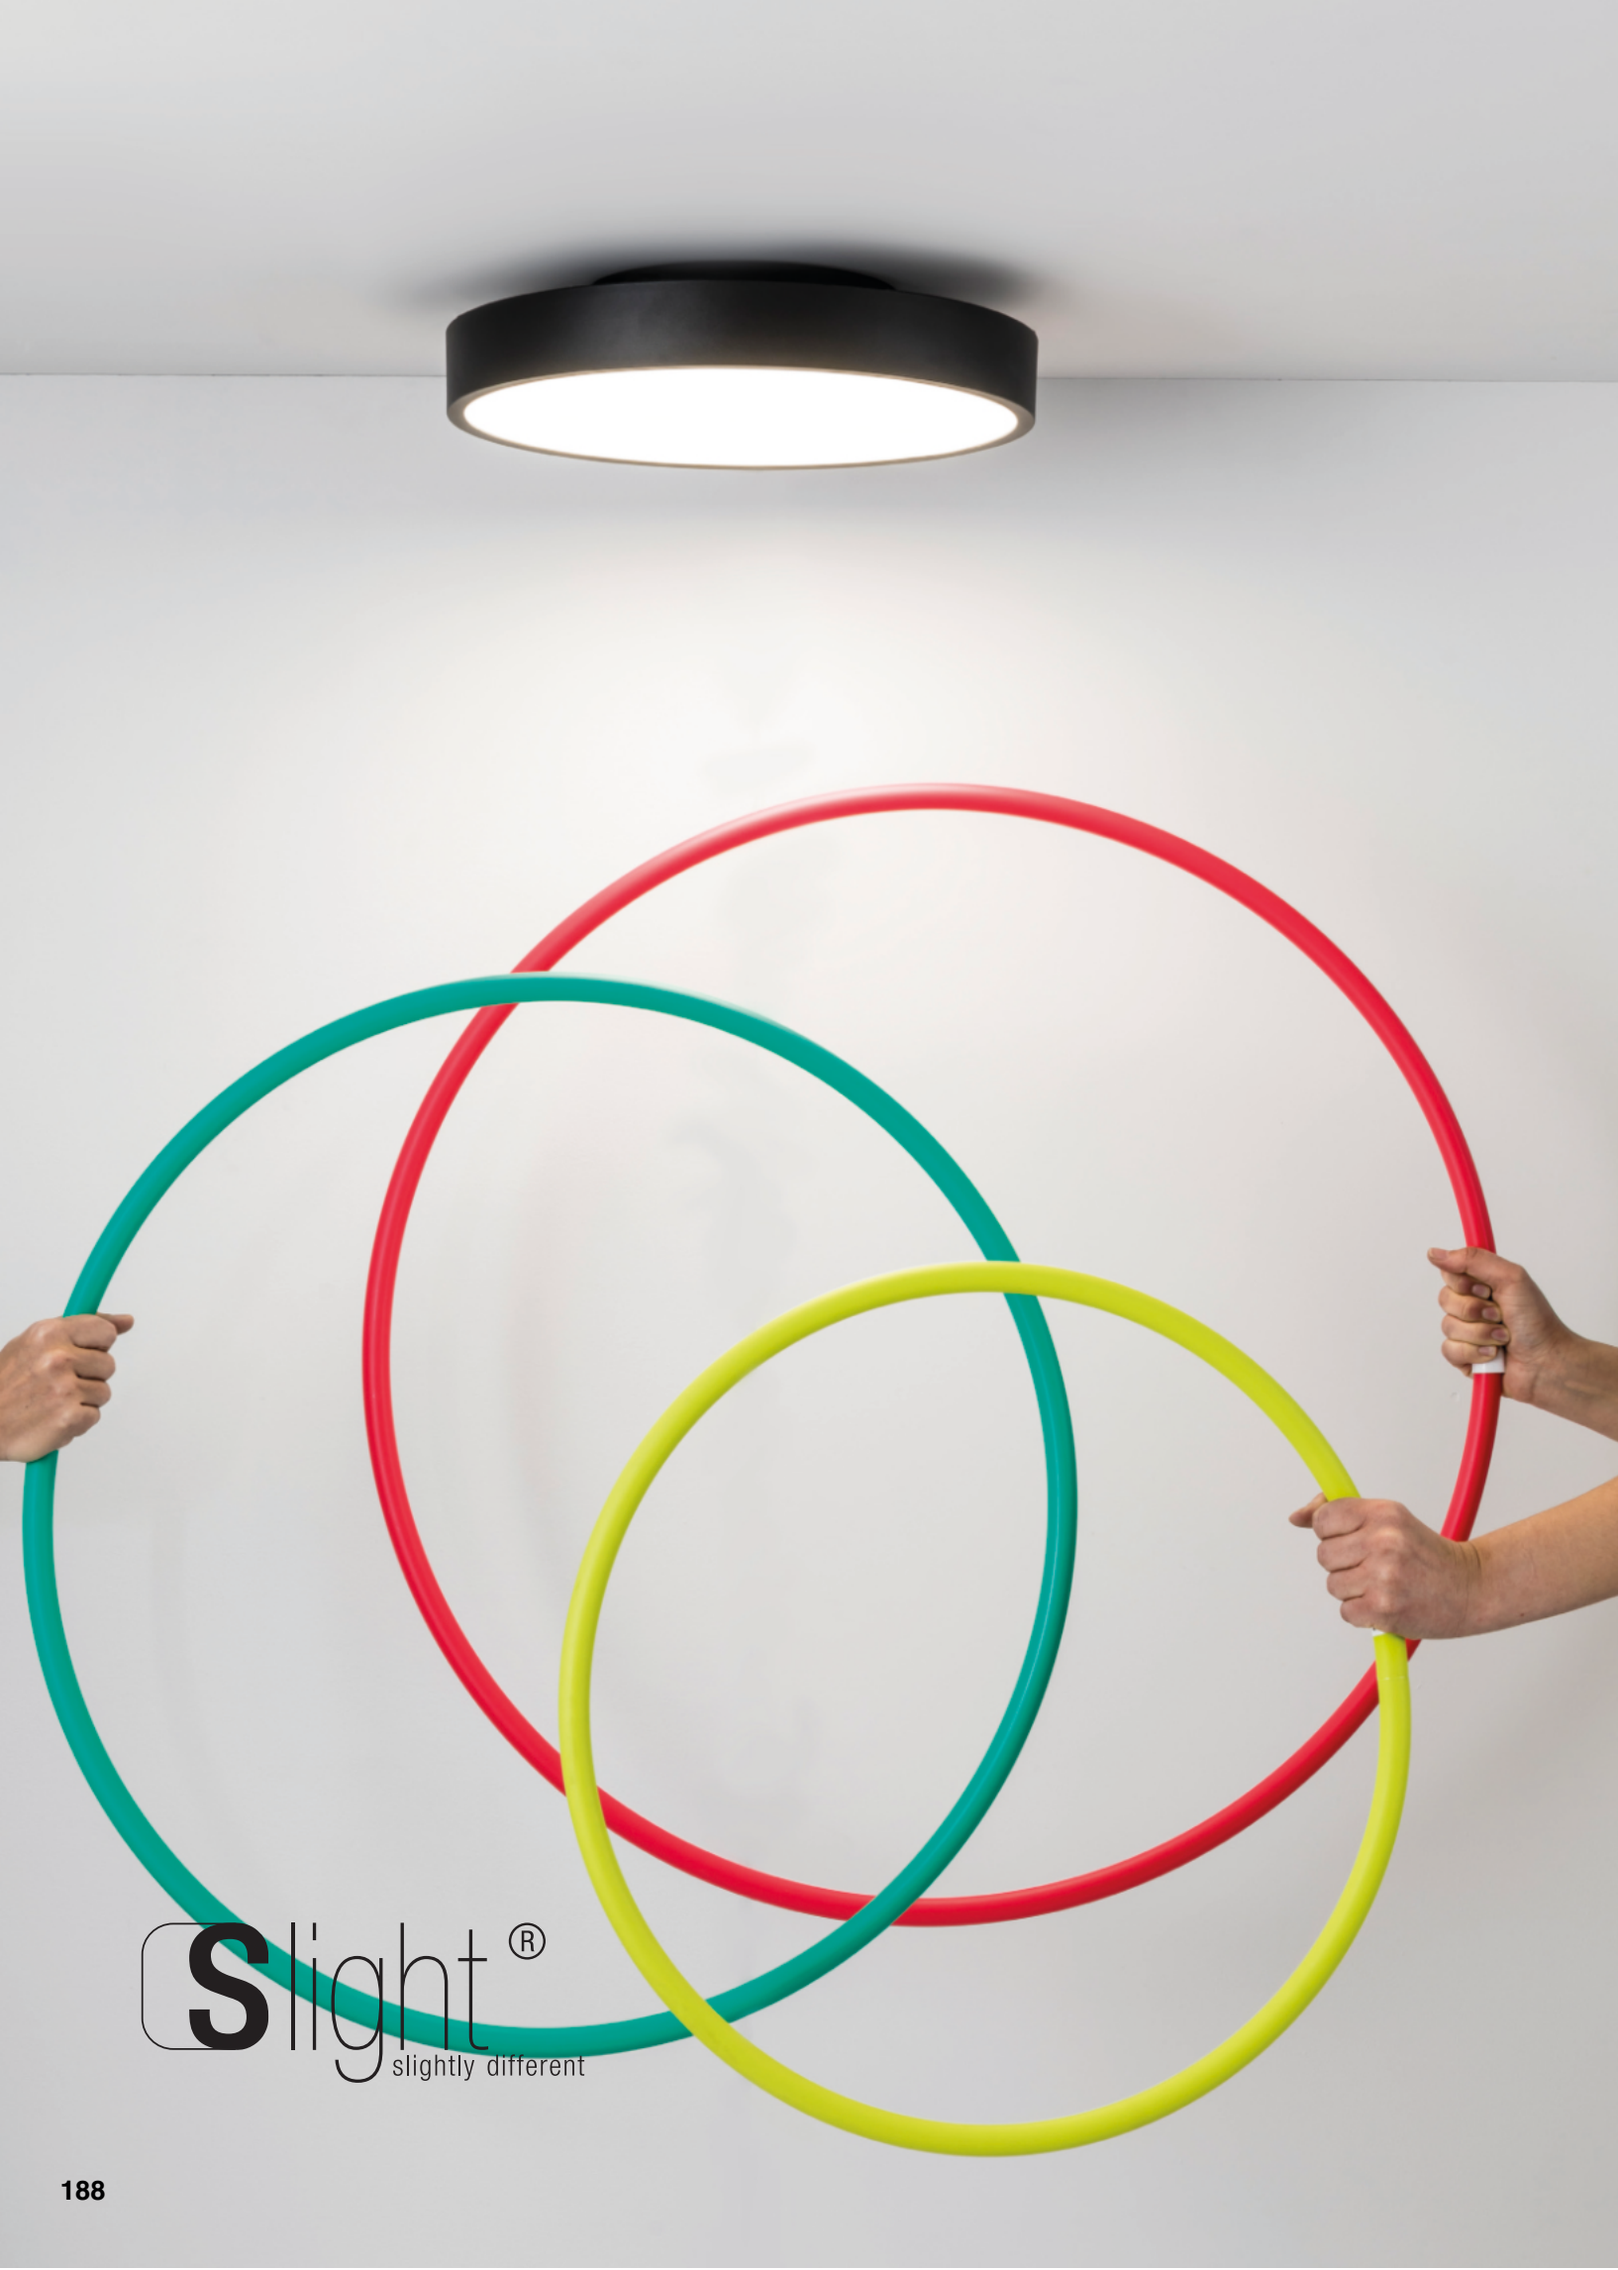
Slight®
slightly different

SURFACE

BLIT is a product with a minimalist design and a rectangular shape.

Designed for surface installation on ceilings and walls, it provides indirect general lighting.

Its elegant design seamlessly integrates into any environment, offering soft and ambient lighting that creates a cozy atmosphere.

BLIT is the ideal choice for achieving discreet and effective lighting that enhances the aesthetics of the space.



Slight®
slightly different



BLIT



Slight®
slightly different

Blit 210mm
20W



Blit 300mm
33W



FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90 **3000K CRI90** **4000K CRI90**

BEAM ANGLE



Asym

CONTROL SYSTEM

DALI CASAMBI

Highlights

Available in two power options and made entirely of aluminum and glass, BLIT provides general illumination through indirect light. Its minimalist design with straight lines allows the luminaire to integrate perfectly into a wide range of spaces, whether installed on the wall or ceiling.





Wall & ceiling



High CRI



Several color temperatures



Restaurant

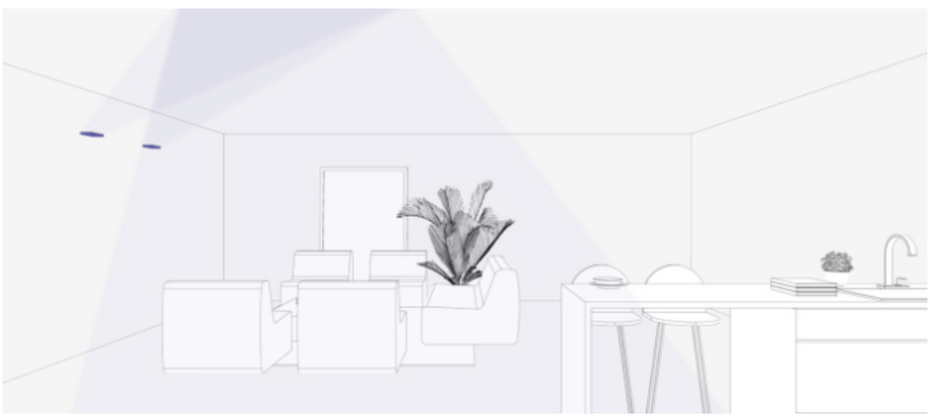

Home

Beam Angle



Asym°

BLIT NEW

incl. DIM 50.000hs L80 / B10 MacAdam 3 220-240V 50 / 60Hz 850°C













Family		Color T°		Beam Angle		Finish		Control System	
0125	Blit 210mm 20w	927	2700K CRI90	9	Asym	1	White	D	DALI
0126	Blit 300mm 33w	930	3000K CRI90			2	Black	W	CASAMBI
		940	4000K CRI90						ON/OFF

0125	927	9	1	D

Example **012592791D** — Blit 210mm 20W 2700K CRI90 White Dali



Asym

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	20W	1633lm	Asym
		90	33W	3412lm	Asym
930	3000K	90	20W	1684lm	Asym
		90	33W	3517lm	Asym
940	4000K	90	20W	1734lm	Asym
		90	33W	3623lm	Asym


Slight®
slightly different

The SCUBA UGR luminaire is a versatile and watertight solution suitable for surface or suspension installation.

It provides high-quality lighting with a Unified Glare Rating (UGR) of less than 19, making it perfect for office environments. Its industrial style adds a touch of modernity and uniqueness to any workspace while providing efficient and comfortable lighting.

It is the ideal choice for creating office environments with an industrial aesthetic and optimal lighting.





Slight®
slightly different

SCUBA







Slight®
slightly different

Scuba 1200mm
36W



FINISH

● **Black**

COLOR TEMPERATURE

3000K | **4000K**

ACCESSORIES



Suspended

CONTROL SYSTEM

DALI CASAMBI

Highlights



With a low UGR glare index, this linear luminaire becomes the ideal choice for both office environments and industrial spaces requiring a high IP rating. In addition, its remarkable impact resistance ensures reliable performance even in demanding work environments. With these features, the luminaire not only provides quality lighting but also ensures long-term durability and safety in various work settings.

IK10



UGR<19



Suspended option



IP65



High CRI


Slight®
slightly different



Suspended



Accesories

Suspended	Suspended DALI
● 042500099	● 042500099D



Office

Beam Angle



50°

SCUBA UGR **36W** NEW

incl. | DIM | 50.000hs L80 / B10 | MacAdam 3 | IP65 | 220-240V | 50 / 60Hz | 650°C





Family	Color T°	Beam Angle	Finish	Control System
0425 Scuba UGR 36W	**930** 3000K CRI90 **940** 4000K CRI90	**5** 50°	**2** Black	**W** CASAMBI **D** DALI ON/OFF

0425	**930**	**5**	**2**	**W**

Example **042593052W** — Scuba UGR 36W 3000K CRI90 50° Black Casambi



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
930	3000K	90	36W	2946lm	50°
940	4000K	90	36W	3034lm	50°



Slight®
slightly different

FOST SURFACE meets the need to accentuate what needs to be highlighted.

A minimalist design that is easy to integrate into any space, bringing the architecture to the forefront.

It can be installed on both the vertical and horizontal plane without the need for a track.



Slight®
slightly different

FOST



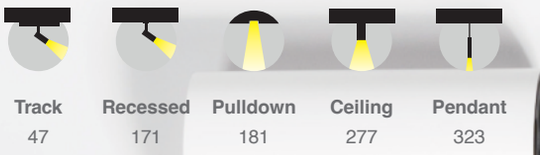

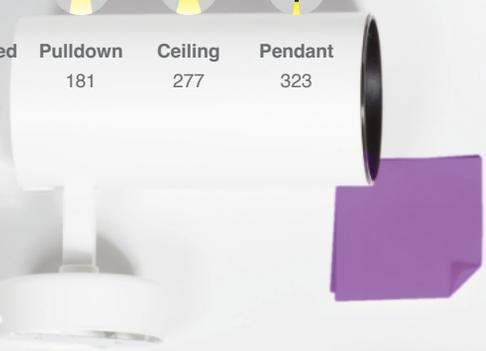











Slight®
slightly different

Fost ø64
14W



Fost ø70
28W



Fost ø90
42W



FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90	**3000K CRI90**	**4000K CRI90**
2700K CRI97	**3000K CRI97**	**4000K CRI97**
MEAT	**BREAD**	**FASHION**

BEAM ANGLE

17° / 18° | 23° / 25° | 35° / 36° / 38° | 60°

ACCESSORIES



Honeycomb



Long Snoot



Striped Glass



Spread Glass

White Ring



Copper Ring

CONTROL SYSTEM







White Ring



Copper Ring



Striped Glass



Long Snoot

Its multiple accessories and combinations facilitate the personalisation of the products, giving it certain architectural relevance and at the same time making it possible to modify the beam or reduce glare.



Spread Glass



Honeycomb



Without accessory



Spread Glass



Striped Glass

Accesories

	Honeycomb	White Ring	Copper Ring	Spread Glass	Long Snoot	Striped Glass
ø64	011700094	011700099	011700098	011700097	011700095	011700096
ø70	011800094	011800099	011800098	011800097	011800095	011800096
ø90	012100094	012100099	012100098	012100097	012100095	012100096

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

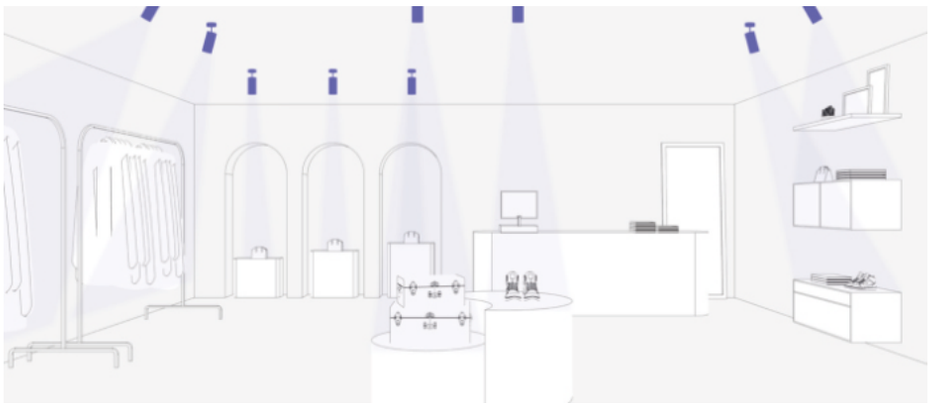

Retail



Restaurant

Beam Angle



17/18°



23/25°



35/36/38°



60°

FOST **SURFACE ø64**

incl. 355° 90° 50.000hs L80 / B10 MacAdam 2&3 220-240V 50 / 60Hz 650°C







Family	Color T°	Beam Angle	Finish
0119 Fost surface ø64 14W	**927** 2700K CRI90	**1** 17°	**1** White
	930 3000K CRI90	**2** 25°	**2** Black
	940 4000K CRI90	**3** 35°	
	X27 2700K CRI97	N **6** 60°	
	X30 3000K CRI97		
	X40 4000K CRI97		

0119 **927** **1** **1**

Example **011992711** — Fost Surface ø64 14W 2700K CRI90 17° White



17°



25°



35°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	14W	950lm / 1076lm / 1127lm / 1248lm	17° / 25° / 35° / 60°
X27		97	14W	855lm / 968lm / 1014lm/ 1123lm	17° / 25° / 35° / 60°
930	3000K	90	14W	979lm / 1109lm / 1162lm / 1287lm	17° / 25° / 35° / 60°
X30		97	14W	881lm / 998lm / 1046lm / 1159lm	17° / 25° / 35° / 60°
940	4000K	90	14W	1008lm / 1142lm / 1197lm / 1326lm	17° / 25° / 35° / 60°
X40		97	14W	908lm / 1028lm / 1077lm / 1193lm	17° / 25° / 35° / 60°

FOST **SURFACE ø70**

incl. | DIM | 355° | 90° | 50.000hs L80 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0120 Fost surface ø70 28W	**927** 2700K CRI90	**1** 18°	**1** White	**C** ON/OFF
	930 3000K CRI90	**2** 23°	**2** Black	
	940 4000K CRI90	**3** 36°		
	X27 2700K CRI97	N **6** 60°		
	X30 3000K CRI97			
	X40 4000K CRI97			



18°



23°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	28W	2982lm / 2987lm / 2732lm / 2436lm	18° / 23° / 36° / 60°
X27		97	28W	2684lm / 2688lm / 2459lm / 2193lm	18° / 23° / 36° / 60°
930	3000K	90	28W	3075lm / 3080lm / 2817lm / 2512lm	18° / 23° / 36° / 60°
X30		97	28W	2767lm / 2771lm / 2535lm / 2261lm	18° / 23° / 36° / 60°
940	4000K	90	28W	3167lm / 3172lm / 2902lm / 2588lm	18° / 23° / 36° / 60°
X40		97	28W	2850lm / 2855lm / 2611lm / 2328lm	18° / 23° / 36° / 60°

FOST **SURFACE ø90**

incl. | DIM | 355° | 90° | 50.000hs L80 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0121 Fost surface ø90 42W	**927** 2700K CRI90	**1** 18°	**1** White	**D** DALI
	930 3000K CRI90	**2** 23°	**2** Black	**C** TRIAC
	940 4000K CRI90	**3** 38°		ON/OFF
	X27 2700K CRI97			
	X30 3000K CRI97			
	X40 4000K CRI97			
	MT MEAT			
	BR BREAD			
	FS FASHION			



18°



23°



38°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	42W	3374lm / 3656lm / 3856lm	18° / 23° / 38°
X27		97	42W	3036lm / 3290lm / 3470lm	18° / 23° / 38°
930	3000K	90	42W	3478lm / 3769lm / 3975lm	18° / 23° / 38°
X30		97	42W	3130lm / 3392lm / 3577lm	18° / 23° / 38°
940	4000K	90	42W	3582lm / 3882lm / 4094lm	18° / 23° / 38°
X40		97	42W	3224lm / 3493lm / 3684lm	18° / 23° / 38°
MT	3100K	-	42W	2468lm / 2688lm / 2819lm	18° / 23° / 38°
BR	2500K	-	42W	3330lm / 3627lm / 3803lm	18° / 23° / 38°
FS	3100K	-	42W	3418lm / 3723lm / 3903lm	18° / 23° / 38°


Slight®
slightly different

Surface light fixture suitable for ceilings which do not offer recessed mounting.

The versatility of sizes and optics of FOST CEILING makes it a perfect fixed overhead application solution for commercial spaces, hotels, restaurants, retail and even domestic spaces due to its various colour temperature and CRI options.



Slight®
slightly different

FOST



FOST Collection



Track	Recessed	Pulldown	Surface	Pendant
47	171	181	267	323



Slight®
slightly different

Fost ø64
14W



Fost ø70
28W



Fost ø90
42W



FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI90	**3000K CRI90**	**4000K CRI90**
2700K CRI97	**3000K CRI97**	**4000K CRI97**
MEAT	**BREAD**	**FASHION**

BEAM ANGLE



ACCESSORIES



Honeycomb



Long Snoot



Striped Glass



Spread Glass

White Ring



Copper Ring

CONTROL SYSTEM







White Ring



Copper Ring



Striped Glass



Long Snoot

Its multiple accessories and combinations facilitate the product's personalisation, giving it certain architectural relevance and at the same time making it possible to modify the beam or reduce glare.



Spread Glass



Honeycomb



Without accessory



Spread Glass



Striped Glass

Accesories

	Honeycomb	White Ring	Copper Ring	Spread Glass	Long Snoot	Striped Glass
ø64	011700094	011700099	011700098	011700097	011700095	011700096
ø70	011800094	011800099	011800098	011800097	011800095	011800096
ø90	012100094	012100099	012100098	012100097	012100095	012100096

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

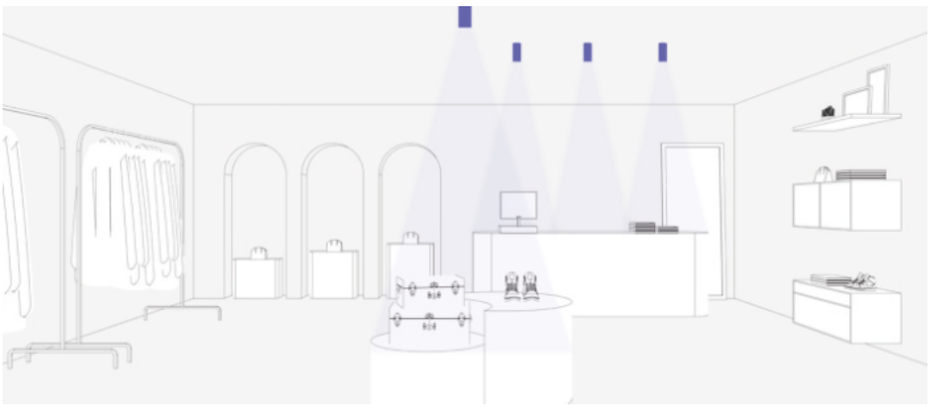

Retail



Restaurant

Beam Angle



17/18°



23/25°



35/36/38°



60°

FOST **CEILING ø64**

incl. | 50.000hs L80 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish
0510 Fost ceiling ø64 14W	**927** 2700K CRI90	**1** 17°	**1** White
	930 3000K CRI90	**2** 25°	**2** Black
	940 4000K CRI90	**3** 35°	
	X27 2700K CRI97	N **6** 60°	
	X30 3000K CRI97		
	X40 4000K CRI97		

0510	**927**	**1**	**1**

Example **051092711** — Fost Ceiling ø64 14W 2700K CRI90 17° White



17°



25°



35°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	14W	950lm / 1076lm / 1127lm / 1248lm	17° / 25° / 35° / 60°
X27		97	14W	855lm / 1968lm / 1014lm/ 1123lm	17° / 25° / 35° / 60°
930	3000K	90	14W	979lm / 1109lm / 1162lm / 1287lm	17° / 25° / 35° / 60°
X30		97	14W	881lm / 998lm / 1046lm / 1159lm	17° / 25° / 35° / 60°
940	4000K	90	14W	1008lm / 1142lm / 1197lm / 1326lm	17° / 25° / 35° / 60°
X40		97	14W	908lm / 1028lm / 1077lm / 1193lm	17° / 25° / 35° / 60°

FOST **CEILING ø70**

incl. | 50.000hs L80 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family		Color T°		Beam Angle		Finish		Control System	
0511	Fost ceiling ø70 28W	**927**	2700K CRI90		**1** 18°	**1**	White	**C**	TRIAC
		930	3000K CRI90		**2** 23°	**2**	Black		**ON/OFF**
		940	4000K CRI90		**3** 36°				
		X27	2700K CRI97	N	**6** 60°				
		X30	3000K CRI97						
		X40	4000K CRI97						



18°



23°



36°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	28W	2982lm / 2987lm / 2732lm / 2436lm	18° / 23° / 36° / 60°
X27		97	28W	2684lm / 2688lm / 2459lm / 2193lm	18° / 23° / 36° / 60°
930	3000K	90	28W	3075lm / 3080lm / 2817lm / 2512lm	18° / 23° / 36° / 60°
X30		97	28W	2767lm / 2771lm / 2535lm / 2261lm	18° / 23° / 36° / 60°
940	4000K	90	28W	3167lm / 3172lm / 2902lm / 2588lm	18° / 23° / 36° / 60°
X40		97	28W	2850lm / 2855lm / 2611lm / 2328lm	18° / 23° / 36° / 60°

FOST **CEILING ø90**

incl. | DIM | 50.000hs L80 / B10 | MacAdam 2&3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0512 Fost ceiling ø90 42W	**927** 2700K CRI90	**1** 18°	**1** White	**D** DALI
	930 3000K CRI90	**2** 23°	**2** Black	**C** TRIAC
	940 4000K CRI90	**3** 38°		ON/OFF
	X27 2700K CRI97			
	X30 3000K CRI97			
	X40 4000K CRI97			
	MT MEAT			
	BR BREAD			
	FS FASHION			



18°



23°



38°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	42W	3374lm / 3656lm / 3856lm	18° / 23° / 38°
X27		97	42W	3036lm / 3290lm / 3470lm	18° / 23° / 38°
930	3000K	90	42W	3478lm / 3769lm / 3975lm	18° / 23° / 38°
X30		97	42W	3130lm / 3392lm / 3577lm	18° / 23° / 38°
940	4000K	90	42W	3582lm / 3882lm / 4094lm	18° / 23° / 38°
X40		97	42W	3224lm / 3493lm / 3684lm	18° / 23° / 38°
MT	3100K	-	42W	2468lm / 2688lm / 2819lm	18° / 23° / 38°
BR	2500K	-	42W	3330lm / 3627lm / 3803lm	18° / 23° / 38°
FS	3100K	-	42W	3418lm / 3723lm / 3903lm	18° / 23° / 38°


Slight®
slightly different

DOMIO is a family of circular light fixtures with pure lines.

Its different sizes and installation options make it an ideal solution for the lighting of big spaces like lobbies, conference rooms and restaurants.

Its glare control options and tunable white make it a perfect option for work zones and spaces dedicated to healthcare.



Slight®
slightly different


DOMIO



Slight®
slightly different

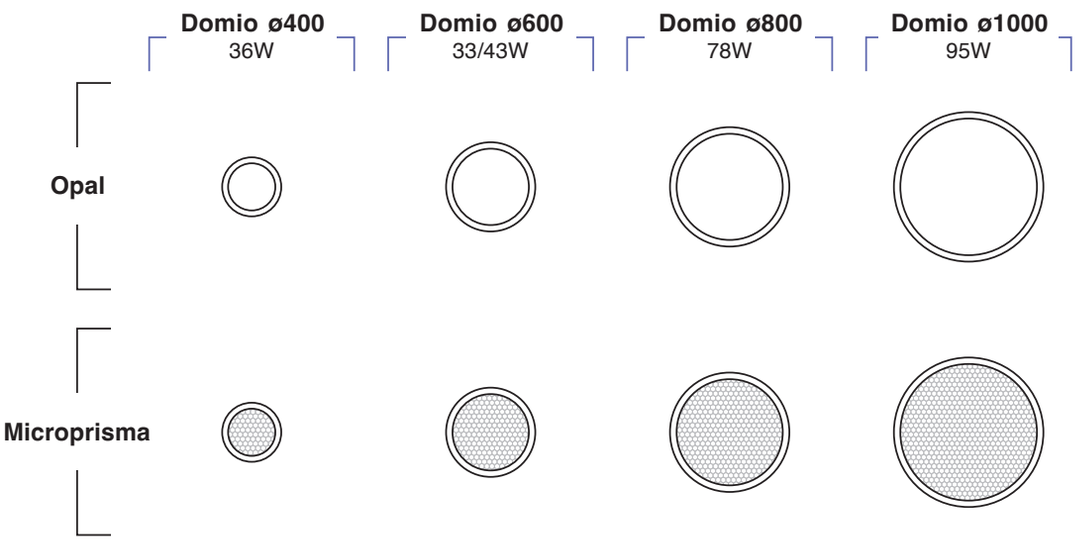

FINISH

● Black ○ White

COLOR TEMPERATURE

3000K | 4000K | 2700-6500K

ACCESSORIES



Suspended

CONTROL SYSTEM

DALI CASAMBI

Highlights

Available in 4 sizes of 400 mm, 600 mm, 800 mm and 1000 mm with two optics variants: opal high-transmittance PMMA to offer uniform and microprismatic general lighting for applications where glare control is required. Its UGR<19 make it an ideal option for office or continuous work applications.





UGR<19



Different sizes
Diversos tamaños



Tunable white



Semi Recessed option
Opción semi empotrado



Wall & ceiling
Aplique y plafón



Suspended option
Opción colgante


Slight®
slightly different



Suspended



Accesories

Suspended
● 050000097
● 050000098



Office

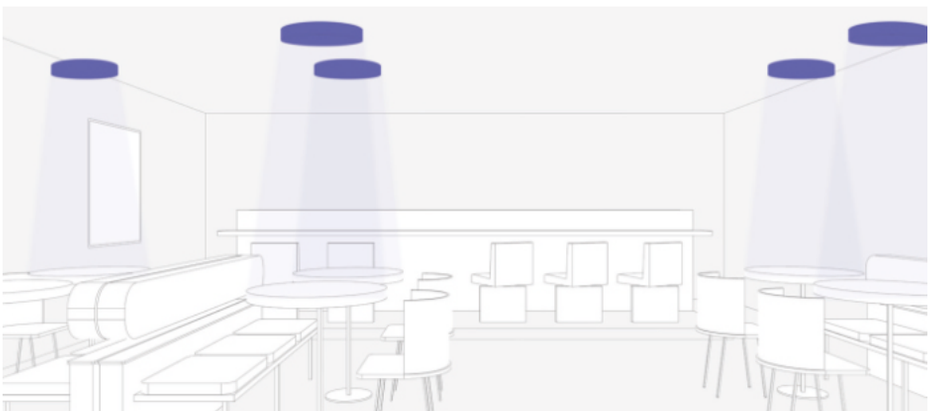

Restaurant



Retail

Beam Angle



90°



110°

DOMIO **ø400 36W**

incl. | DIM | 50.000hs L80 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C | UGR <19





Family	Color T°	Diffuser	Finish	Control System
0414 Domio ø400 36W	**830** 3000K CRI80	**1** Opal	**1** White	**W** CASAMBI
	840 4000K CRI80	**2** Microprisma	**2** Black	**D** DALI
				ON/OFF

0414	**830**	**1**	**1**	**W**

Example **041483011W** — Domio ø400 36W 3000K Opal Diffusor White Casambi



90°
microprisma



110°
opal

Option	Color T°	CRI	Power	Lumen Output	Diffuser
830	3000K	80	36W	3861lm	Opal
				3047lm	Microprisma
840	4000K	80	36W	3977lm	Opal
				3138lm	Microprisma

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

DOMIO **ø600 43W**

incl. DIM TW 50.000hs L80 / B10 MacAdam 3 220-240V 50 / 60Hz 650°C UGR <19





Family	Color T°	Diffuser	Finish	Control System
0415 Domio ø600 43W	**830** 3000K CRI80 **840** 4000K CRI80	**1** Opal **2** Microprisma	**1** White **2** Black	**W** CASAMBI **D** DALI ON/OFF
0419 Domio ø600 33W TW	**TW** 2700-6500K	**1** Opal **2** Microprisma	**1** White **2** Black	**W** CASAMBI **D** DALI



90°
microprisma



110°
opal

Option	Color T°	CRI	Power	Lumen Output	Diffuser
830	3000K	80	43W	4725lm	Opal
				4059lm	Microprisma
840	4000K	80	43W	4867lm	Opal
				4181lm	Microprisma

DOMIO ø600 TW					
TW	2700-6500K	-	33W	3528lm	Opal
TW	2700-6500K	-	33W	3031lm	Microprisma

DOMIO **ø800 78W**

incl. | DIM | 50.000hs L80 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C | UGR <19





Family	Color T°	Diffuser	Finish	Control System
0416 Domio ø800 78W	**830** 3000K CRI80 **840** 4000K CRI80	**1** Opal **2** Microprisma	**1** White **2** Black	**W** CASAMBI **D** DALI ON/OFF



90°
microprisma



110°
opal

Option	Color T°	CRI	Power	Lumen Output	Diffuser
830	3000K	80	78W	8174lm	Opal
				7022lm	Microprisma
840	4000K	80	78W	8419lm	Opal
				7232lm	Microprisma

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch

DOMIO **ø1000 95W**

incl. | DIM | 50.000hs L80 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C | UGR <19





Family	Color T°	Diffuser	Finish	Control System
0417 Domio ø1000 95W	**830** 3000K CRI80	**1** Opal	**1** White	**W** CASAMBI
	840 4000K CRI80	**2** Microprisma	**2** Black	**D** DALI
				ON/OFF



90°
microprisma



110°
opal

Option	Color T°	CRI	Power	Lumen Output	Diffuser
830	3000K	80	95W	10490lm	Opal
				9010lm	Microprisma
840	4000K	80	95W	10804lm	Opal
				9281lm	Microprisma

PODIUM is a modular system of recessed and surface light fixtures which offers different light effects and configurations, enabling the creation of different climates with an integrated aesthetic.

One product, one project, infinite possibilities.

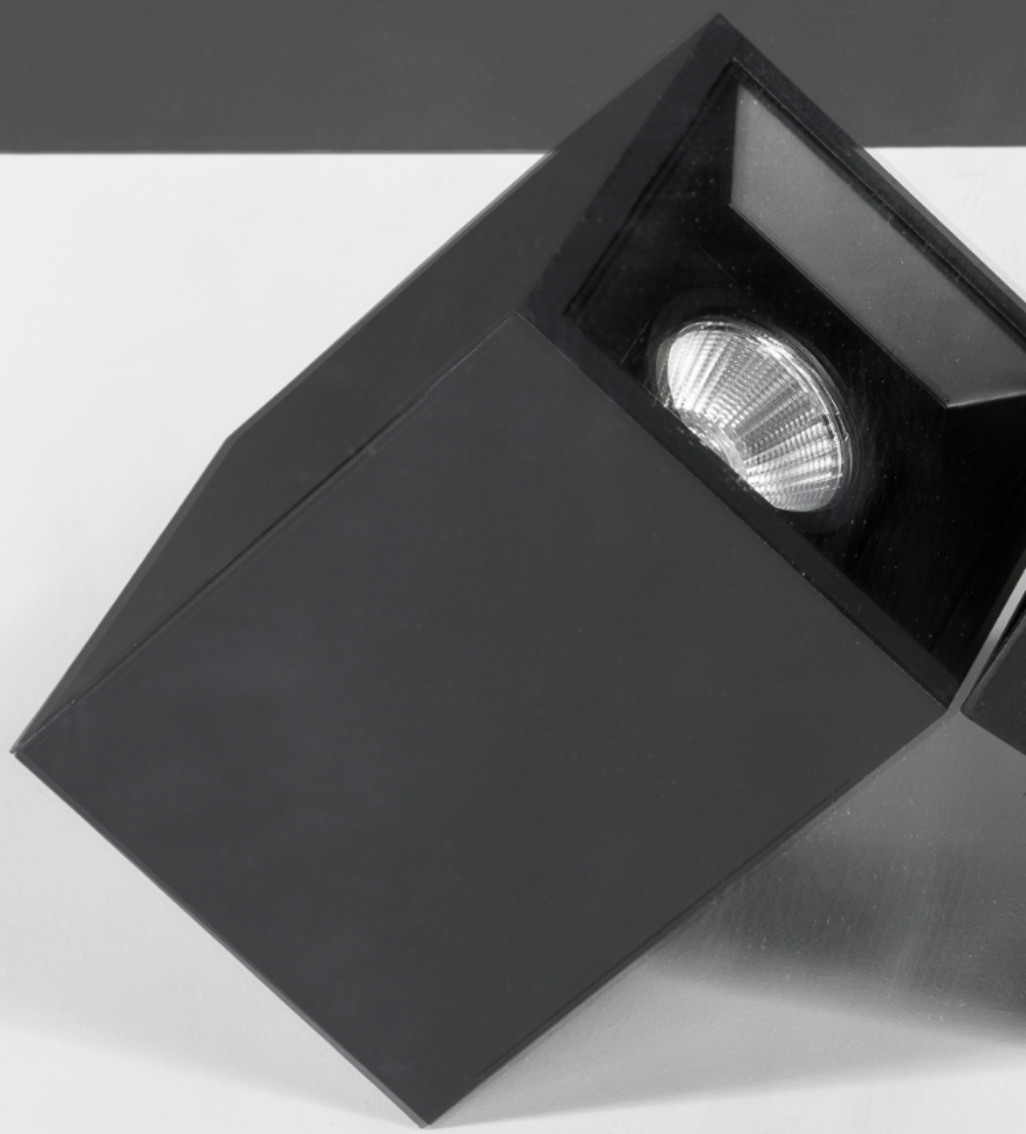

Slight®
slightly different



PODIUM

Downlight
225



Slight®
slightly different

MODULE

DFG

13W



DFA

14W



DOA



PROJECTOR

8W



SURFACE BOX



108x108



108x206



108x304

FINISH

● **Black** ○ **White**

COLOR TEMPERATURE

2700K CRI97	**3000K CRI97**	**4000K CRI97**
2700K CRI90	**3000K CRI90**	**4000K CRI90**

BEAM ANGLE



ACCESSORIES



Honeycomb



Striped glass



Diffusion sheet

CONTROL SYSTEM







Highlights



DOA



DFG



DFA



Projector



Surface 1L



Surface 2L



Surface 3L

















Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch



Slight®
slightly different









Surface box 1L



Surface box 2L



Surface box 3L









Honeycomb



Stripped Glass



Diffusion Sheet

Surface box

Surface box 1L	Surface box 2L	Surface box 3L
● 051300011	● 051400021	● 051500031
● 051300012	● 051400022	● 051500032

Accessories
for DFA&DOA

Honeycomb	Stripped Glass	Diffusion sheet
034100098	034100097	034100099

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch



Residential



Restaurant

Beam Angle



18°



24/25°



35/38°



60°



90°



110°

PODIUM **DFA MODULE**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0341 Podium DFA Module 15W	**927** 2700K CRI97 **930** 3000K CRI97 **940** 4000K CRI97	**1** 15° **2** 24° **3** 38° **6** 60°	**1** White **2** Black	**W** CASAMBI **D** DALI **C** TRIAC ON/OFF

0341	**927**	**1**	**1**	**W**

Example **034192711W** — Podium DFA Module 15W 2700K CRI97 15° White Casambi



15°



24°



38°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
X27	2700K	97	15W	1121lm / 1026lm / 1036lm / 1060lm	15° / 24° / 38° / 60°
X30	3000K	97	15W	1156lm / 1058lm / 1068lm / 1093lm	15° / 24° / 38° / 60°
X40	4000K	97	15W	1191lm / 1090lm / 1100lm / 1126lm	15° / 24° / 38° / 60°

PODIUM **DOA MODULE**

incl. | DIM | 355° | 20° | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0342 Podium DOA Module 15W	**927** 2700K CRI97	**1** 15°	**1** White	**W** CASAMBI
	930 3000K CRI97	**2** 24°	**2** Black	**D** DALI
	940 4000K CRI97	**3** 38°		**C** TRIAC
		6 60°		ON/OFF



15°



24°



38°



60°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
X27	2700K	97	15W	435lm / 439lm / 448lm / 456lm	15° / 24° / 38° / 60°
X30	3000K	97	15W	448lm / 453lm / 462lm / 470lm	15° / 24° / 38° / 60°
X40	4000K	97	15W	461lm / 467lm / 476lm / 484lm	15° / 24° / 38° / 60°

PODIUM **DFG MODULE**

incl. | DIM | 50.000hs L70 / B10 | MacAdam 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0343 Podium DFG Module 13W	**927** 2700K CRI90 **930** 3000K CRI90 **940** 4000K CRI90	**0** 110°	**1** White **2** Black	**W** CASAMBI **D** DALI **C** TRIAC ON/OFF



110°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	13W	648lm	110°
930	3000K	90	13W	668lm	110°
940	4000K	90	13W	688lm	110°

PODIUM **PROJECTOR MODULE**

incl. DIM 355° 90° 50.000hs L70 / B10 MacAdam 3 220-240V 50 / 60Hz 650°C







Family	Color T°	Beam Angle	Finish	Control System
0345 Podium Projector Module 8W	**927** 2700K CRI97 **930** 3000K CRI97 **940** 4000K CRI97	**1** 15° **2** 25°	**1** White **2** Black	**W** CASAMBI **D** DALI **C** TRIAC ON/OFF



15°



25°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
X27	2700K	97	8W	273lm / 273lm	15° / 25°
X30	3000K	97	8W	281lm/ 281lm	15° / 25°
X40	4000K	97	8W	289lm / 289lm	15° / 25°



Slight®
slightly different

SUSPENDED

FOST PENDANT is a tubular shaped suspended light fixture with a proportion designed to be part of the architecture by providing an aesthetic value and accentuating what needs to be highlighted.

Its technical and decorative character, and its multiple options of size, optics, colour temperatures and CRI make it an ideal option for architectural spaces like restaurants, hotels and other spaces where it is necessary to combine aesthetic values and technical lighting.



Slight®
slightly different

FOST



FOST Collection



Track	Recessed	Pulldown	Ceiling	Surface
47	171	181	277	267

Slight®
slightly different

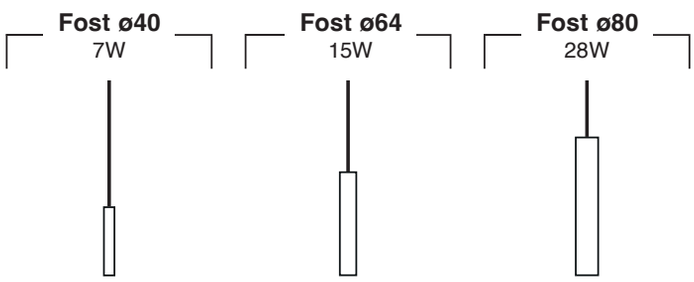

FINISH

● Black ○ White

COLOR TEMPERATURE

2700K CRI90	3000K CRI90	4000K CRI90
2700K CRI97	3000K CRI97	4000K CRI97
MEAT	BREAD	FASHION

BEAM ANGLE

17° / 18°	23° / 25°	35° / 38°

ACCESSORIES

Honeycomb	White Ring	Copper Ring

CONTROL SYSTEM

DALI TRIAC



White Ring



Copper Ring



Honeycomb

Its multiple accessories and combinations facilitate the product's personalisation, giving it certain architectural relevance and at the same time making it possible to modify the beam or reduce glare.

Accesories

	Honeycomb	White Ring	Copper Ring
ø40	-	011500099	011500098
ø64	011700094	011700099	011700098
ø80	011300097	011300099	011300098

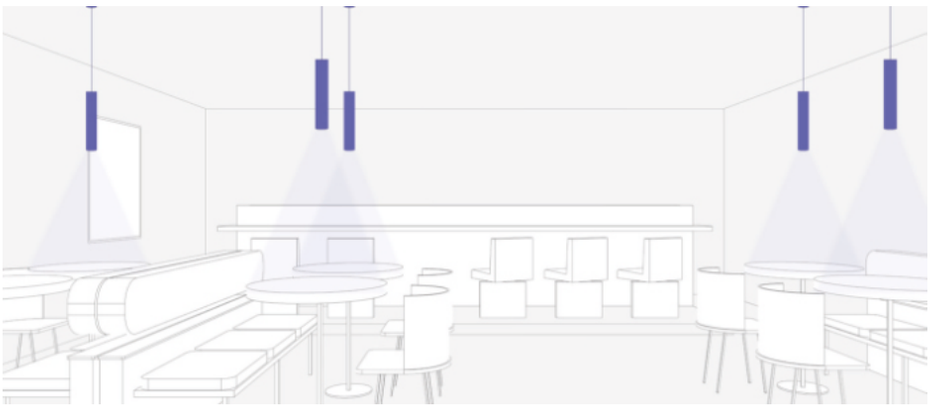

Restaurant

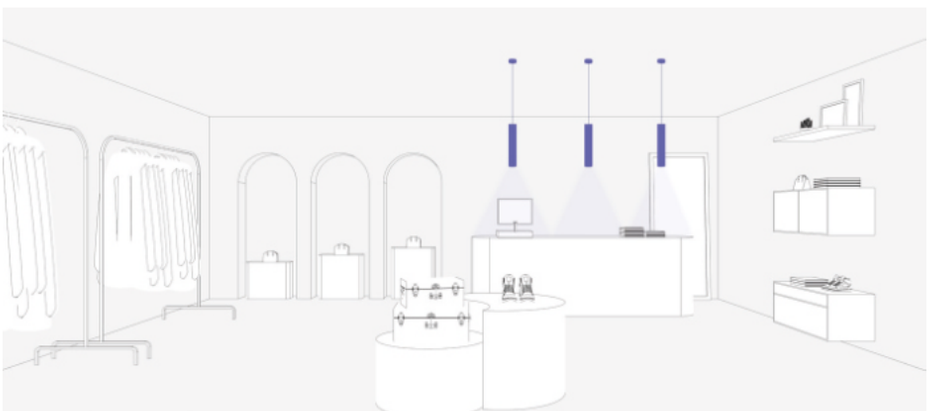

Retail

Beam Angle



17/18°



23/25°



35/38°

FOST **PENDANT ø40**

incl. 50.000hs L80 / B10 — MacAdam 2 & 3 — 220-240V — 50 / 60Hz — 650°C





Family	Color T°	Beam Angle	Finish	Control System
0411 Fost Pendant ø40 7W	**927** 2700K CRI90	**1** 18°	**1** White	ON/OFF
	930 3000K CRI90	**2** 23°	**2** Black	N **D** DALI
	940 4000K CRI90	**3** 35°		
	X27 2700K CRI97			
	X30 3000K CRI97			
	X40 4000K CRI97			

0411	**927**	**1**	**1**

Example **041192711** — Fost Pendant ø40 7W 2700K CRI90 18° White



18°



23°



35°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	7W	632lm / 553lm / 586lm	18° / 23° / 35°
X27		97	7W	569lm / 498lm / 527lm	18° / 23° / 35°
930	3000K	90	7W	652lm / 570lm / 604lm	18° / 23° / 35°
X30		97	7W	587lm / 513lm / 544lm	18° / 23° / 35°
940	4000K	90	7W	652lm / 587lm / 622lm	18° / 23° / 35°
X40		97	7W	587lm / 528lm / 560lm	18° / 23° / 35°

FOST **PENDANT ø64**

incl. | DIM | 50.000hs L80 / B10 | MacAdam 2 & 3 | 220-240V | 50 / 60Hz | 650°C







Family	Color T°	Beam Angle	Finish	Control System
0412 Fost Pendant ø64 14W	**927** 2700K CRI90	**1** 17°	**1** White	**C** TRIAC
	930 3000K CRI90	**2** 25°	**2** Black	ON/OFF
	940 4000K CRI90	**3** 35°		N **D** DALI
	X27 2700K CRI97			
	X30 3000K CRI97			
	X40 4000K CRI97			



17°



25°



35°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	14W	1372lm / 1553lm / 1503lm	17° / 25° / 35°
X27		97	14W	1235lm / 1398lm / 1352lm	17° / 25° / 35°
930	3000K	90	14W	1414lm / 1601lm / 1549lm	17° / 25° / 35°
X30		97	14W	1273lm / 1441lm / 1394lm	17° / 25° / 35°
940	4000K	90	14W	1457lm / 1650lm / 1596lm	17° / 25° / 35°
X40		97	14W	1311lm / 1484lm / 1436lm	17° / 25° / 35°

FOST **PENDANT ø80**

incl. | DIM | 50.000hs L80 / B10 | MacAdam 2 & 3 | 220-240V | 50 / 60Hz | 650°C







Family		Color T°		Beam Angle		Finish		Control System	
0413	Fost Pendant ø80 28W	927	2700K CRI90	1	18°	1	White	D	DALI
		930	3000K CRI90	2	23°	2	Black	C	TRIAC
		940	4000K CRI90	3	38°				ON/OFF
		X27	2700K CRI97						
		X30	3000K CRI97						
		X40	4000K CRI97						



18°



23°



38°

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700K	90	28W	1684lm / 1772lm / 1334lm	18° / 23° / 38°
X27		97	28W	1515lm / 1595lm / 1200lm	18° / 23° / 38°
930	3000K	90	28W	1736lm / 1827lm / 1375lm	18° / 23° / 38°
X30		97	28W	1562lm / 1644lm / 1237m	18° / 23° / 38°
940	4000K	90	28W	1788lm / 1882lm / 1416lm	18° / 23° / 38°
X40		97	28W	1609lm / 1693lm / 1274lm	18° / 23° / 38°

Slight® ■ ch. de la Veyre d'en Haut D2 ■ 1806 St-Légier - Switzerland ■ +41 21 925 38 88 ■ info@slight.ch ■ www.slight.ch


Slight®
slightly different


Slight®
slightly different

SYSTEMS

NESO, a magnetic track system, seamlessly integrates various luminaires,
ranging from general lights to striking accents.

Its modular and magnetic design not only provides flexibility but also transforms environments with its exceptional adaptability and design.

Ideal for commercial settings, NESO offers projectors with up to 20W, whereas NESO Slim, tailored for residential spaces, brings elegance and an endless array of options to craft truly unique atmospheres.



Slight®
slightly different

THE MAGNETIC TRACK SYSTEM

NESO





Highlights

Neso Slim



Super Slim design



Maximum integration of luminaires on rail

Neso Slim and Standard



Magnetic



Versatility



UGR<16 Option



Connectivity


Slight®
slightly different

NESO
SLIM







Slight®
slightly different

TRACKS

RECESSED



1000 I 2000

SURFACE



1000 I 2000

PENDANT



1000 I 2000

MODULES

Neso Slim
Point



305



388

Neso Slim
Unik



ø150



ø150

Neso Slim
Line



305



704

Neso Slim
Hole



ø35



ø50

Neso Slim
Top



ø35

FINISH

● **Black**

COLOR TEMPERATURE

2700K CRI>90 **3000K CRI>90**

CONTROL SYSTEM

DALI CASAMBI

TRACK **RECESSED**

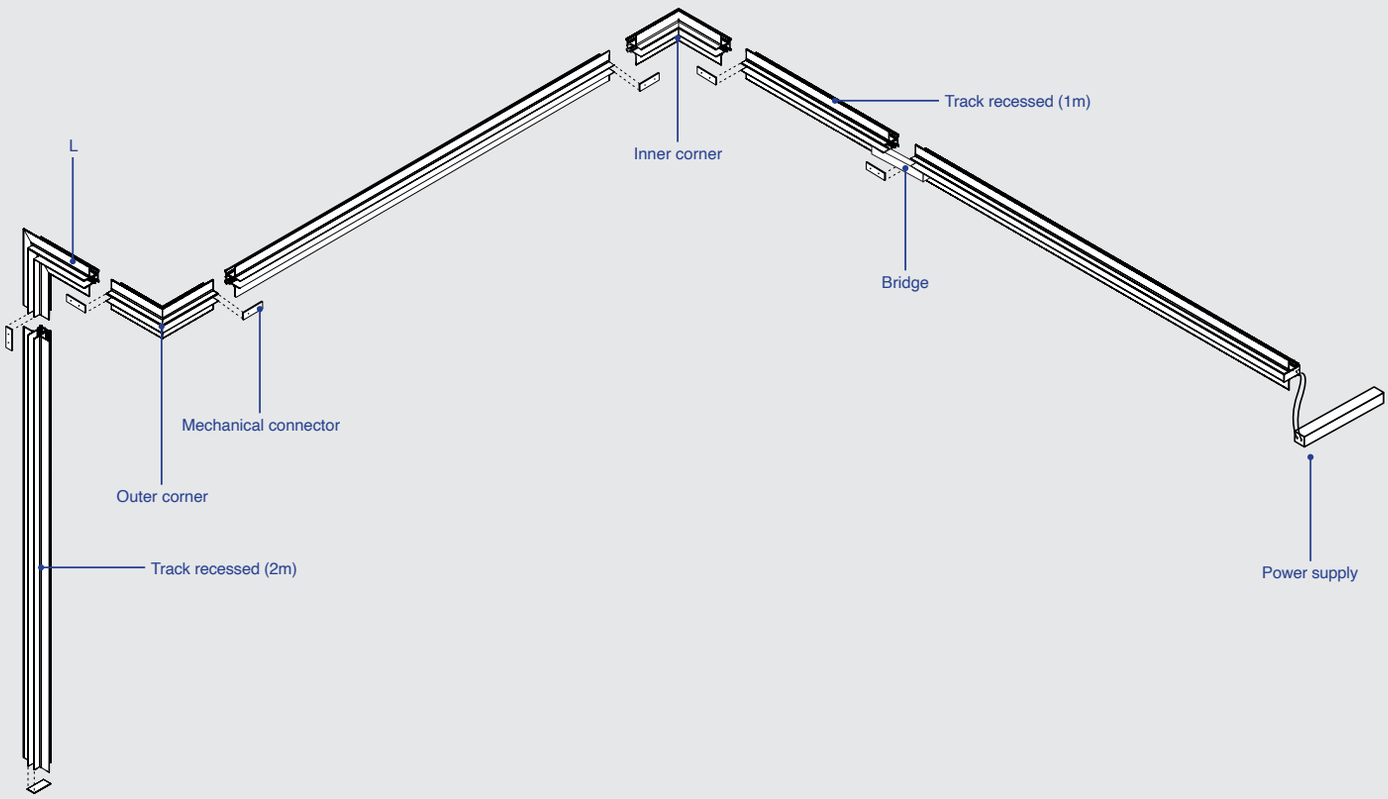





24V

Family		Track Length		Finish		Control System	
6020120	Neso Track Recessed	**10**	1m	**2**	Black	**D**	DALI
		20	2m				**ON/OFF**

ACCESSORIES



● **6020200102**	Mechanical connector
● **6020115102**	Bridge
● **6020115102D**	Bridge DALI
● **6020R120102**	Track cover

POWER SUPPLY

98324120	Power supply 120W
98324150	Power supply 150W
98324180	Power supply 180W
98324200	Power supply 200W



● **6020221002**	L
● **6020221002D**	L DALI



● **6020221102**	T
● **6020221102D**	T DALI



● **6020221202**	Inner corner
● **6020221202D**	Inner corner DALI



● **6020221302**	Outer corner
● **6020221302D**	Outer corner DALI

TRACK **SURFACE & SUSPENSION**

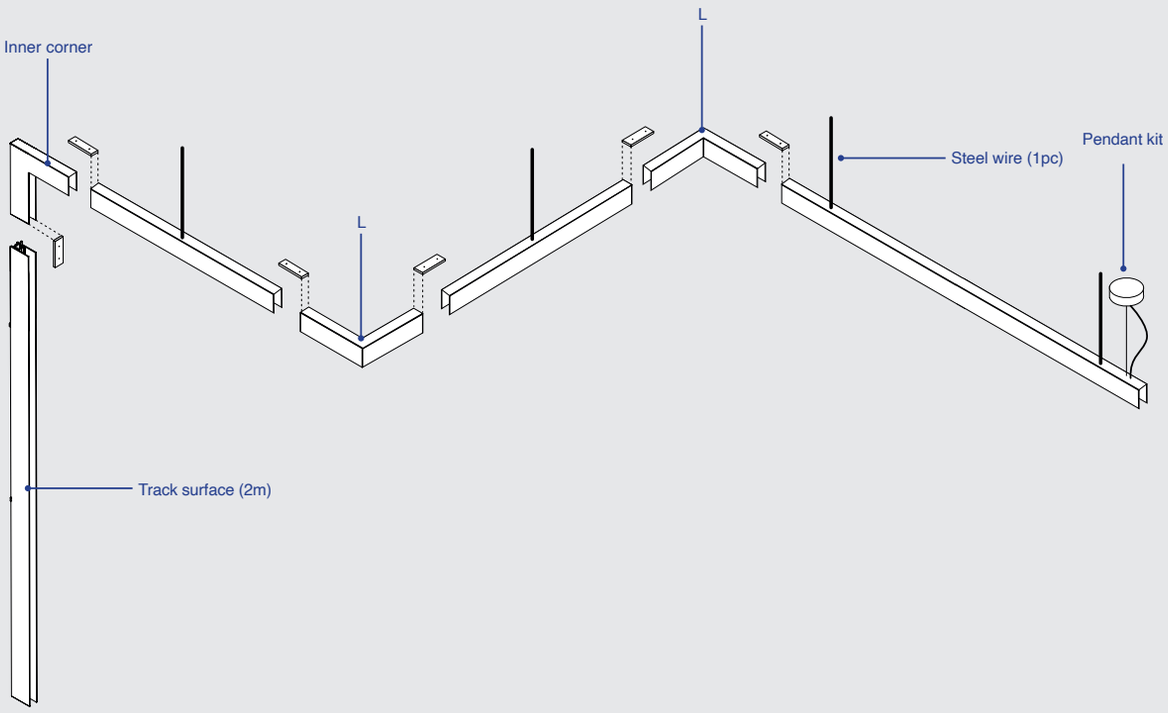



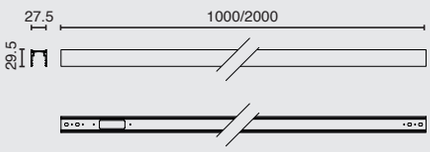

24V

Family		Track Length		Finish		Control System	
6020110	Neso Track Surface	**10**	1m	**2**	Black	**D**	DALI
		20	2m	2			**ON/OFF**

ACCESSORIES





● **6020200102**	Mechanical connector
● **6020200103**	Surface mounting Kit
● **6020210202**	Pendant Kit
● **6020210202D**	Pendant kit DALI
6020210102	Steel wire
6020R120102	Track cover
POWER SUPPLY	
98324120	Power supply 120W
98324150	Power supply 150W
98324180	Power supply 180W
98324200	Power supply 200W



● **6020115102**	Bridge
● **6020115102D**	Bridge DALI



● **6020211002**	L
● **6020211002D**	L DALI



● **6020211102**	T
● **6020211102D**	T DALI



● **6020211202**	Inner corner
● **6020211202D**	Inner corner DALI



● **6020211302**	Outer corner
● **6020211302D**	Outer corner DALI

NESO SLIM **POINT 12L** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C | UGR <16







25°

Family	Color T°	Beam Angle	Finish	Control System
60102 Point slim 12L 12W	**927** 2700K 816lm CRI>90 **930** 3000K 841lm CRI>90	**1** 25°	**2** Black	**W** CASAMBI **D** DALI ON/OFF

NESO SLIM **POINT 24L** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C | UGR <16







25°

Family	Color T°	Beam Angle	Finish	Control System
60103 Point slim 24L 24W	**927** 2700K 1674lm CRI>90 **930** 3000K 1726lm CRI>90	**1** 25°	**2** Black	**W** CASAMBI **D** DALI ON/OFF



Slight®
slightly different

NESO SLIM **LINE 30cm** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C







Family	Color T°	Finish	Control System
60104 Line slim 30cm 6W	**927** 2700K 322lm CRI>90 **930** 3000K 332lm CRI>90	**02** Black	**W** CASAMBI **D** DALI ON/OFF

NESO SLIM **LINE 70cm** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C







Family	Color T°	Finish	Control System
60105 Line slim 70cm 18W	**927** 2700K 875lm CRI>90 **930** 3000K 902lm CRI>90	**02** Black	**W** CASAMBI **D** DALI ON/OFF



Slight®
slightly different

NESO SLIM **HOLE ø3.5cm** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C





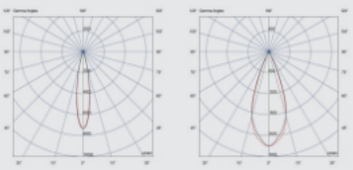

20° 40°

Family	Color T°	Beam Angle	Finish	Control System
60107 Hole slim ø3,5cm 5W	**927** 2700K 360lm CRI>90 **930** 3000K 444lm CRI>90	**1** 20° **2** 40°	**2** Black	**W** CASAMBI **D** DALI ON/OFF

NESO SLIM **HOLE ø5cm** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C





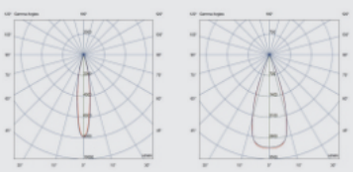

18° 36°

Family	Color T°	Beam Angle	Finish	Control System
60108 Hole slim ø5cm 10W	**027** 2700K 445lm CRI>90 **030** 3000K 592lm CRI>90	**1** 18° **2** 36°	**2** Black	**W** CASAMBI **D** DALI ON/OFF



Slight®
slightly different

NESO SLIM **UNIK** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C







325°

Family	Color T°	Finish	Control System
60108 Unik slim 5W	927 2700K 230lm CRI>90 930 3000K 237lm CRI>90	02 Black	W CASAMBI D DALI ON/OFF

NESO SLIM **UNIK PENDANT** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C







325°

Family	Color T°	Finish	Control System
60109 Unik slim pendant 5W	027 2700K 230lm CRI>90 030 3000K 237lm CRI>90	02 Black	W CASAMBI D DALI ON/OFF

NESO SLIM **TOP** NEW

no incl. | 50.000hs L70/B10 | MacAdam 3 | 24V | 650°C





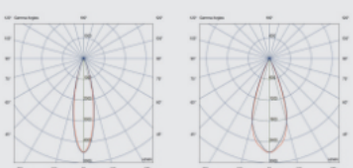

20° 40°

Family	Color T°	Beam Angle	Finish	Control System
60106 Top slim top 5W	927 2700K 308m CRI>90 930 3000K 320lm CRI>90	1 20° 2 40°	2 Black	W CASAMBI D DALI ON/OFF



Slight®
slightly different

NESO **POINT 3L**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	4W	217 / 221lm	12° / 34°
930	3000k	90	4W	292 / 298lm	12° / 34°

NESO **POINT 6L**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	8W	480 / 487lm	12° / 34°
930	3000k	90	8W	506 / 512lm	12° / 34°

NESO **POINT 12L**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	8W	1102 / 1109lm	12° / 34°
930	3000k	90	8W	1107 / 1112lm	12° / 34°

NESO **LINE 32cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	6W	892lm	100°
930	3000k	90	6W	920lm	100°

NESO **LINE 64cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	18W	1399lm	100°
930	3000k	90	18W	1442lm	100°

NESO **HOLE ø3.5cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	5W	360 / 372lm	20° / 40°
930	3000k	90	5W	592 / 602lm	20° / 40°

NESO **HOLE ø5cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	10W	825 / 932lm	18° / 36°
930	3000k	90	10W	954 / 961lm	18° / 36°

NESO **HOLE ø7cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	20W	925 / 931lm	18° / 36°
930	3000k	90	20W	954 / 961lm	18° / 36°

NESO **UNIK**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	5W	256lm	325°
930	3000k	90	5W	264lm	325°

NESO **TOP**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	5W	360 / 371lm	20° / 40°
930	3000k	90	5W	444 / 452lm	20° / 40°

NESO SLIM **POINT 12L**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	12W	816lm	25°
930	3000k	90	12W	841lm	25°

NESO SLIM **POINT 24L**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	24W	1674lm	25°
930	3000k	90	24W	1726lm	25°

NESO SLIM **LINE 30cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	6W	322lm	100°
930	3000k	90	6W	332lm	100°

NESO SLIM **LINE 70cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	18W	875lm	100°
930	3000k	90	18W	902lm	100°

NESO SLIM **HOLE ø3.5cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	5W	334 / 334lm	20° / 40°
930	3000k	90	5W	347 / 344lm	20° / 40°

NESO SLIM **HOLE ø5cm**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	10W	545 / 572lm	18° / 36°
930	3000k	90	10W	562 / 590lm	18° / 36°

NESO SLIM **UNIK**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	5W	230lm	325°
930	3000k	90	5W	237lm	325°

NESO SLIM **TOP**

Option	Color T°	CRI	Power	Lumen Output	Beam Angle
927	2700k	90	5W	308 / 310lm	20° / 40°
930	3000k	90	5W	318 / 320lm	20° / 40°

System designed for the general lighting of spaces.

VIA system allows the creation of continuous light lines. We can also build different formats using the corner accessory. It can be used in surface, suspension or recessed installations.



Slight®
slightly different

VIA







Slight®
slightly different

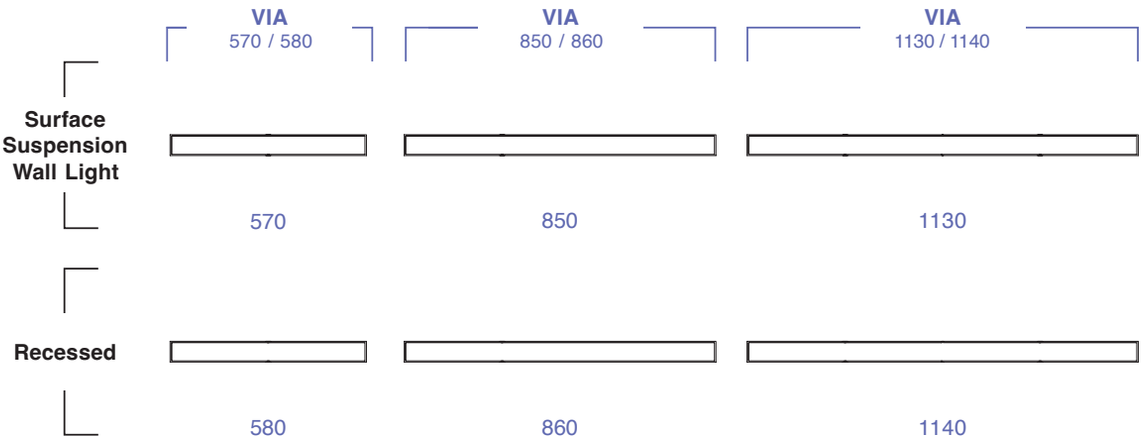

LIGHT DIRECTION

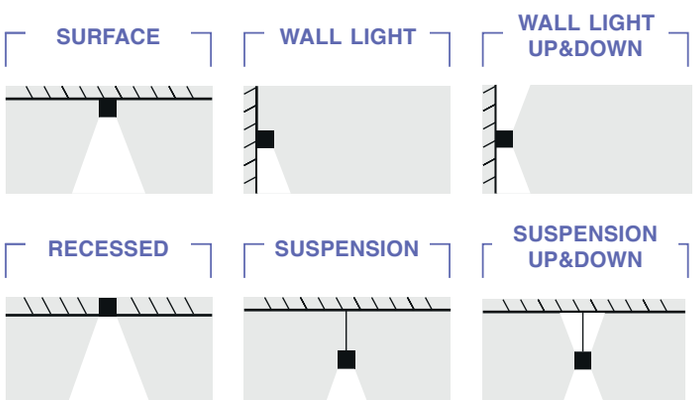

FINISH

● Black ○ White

COLOR TEMPERATURE

3000K CRI80 | 4000K CRI80 | 2700-3000K | LEAF *

DIFFUSER



Opal | Microprisma | UGR

CONTROL SYSTEM

DALI CASAMBI

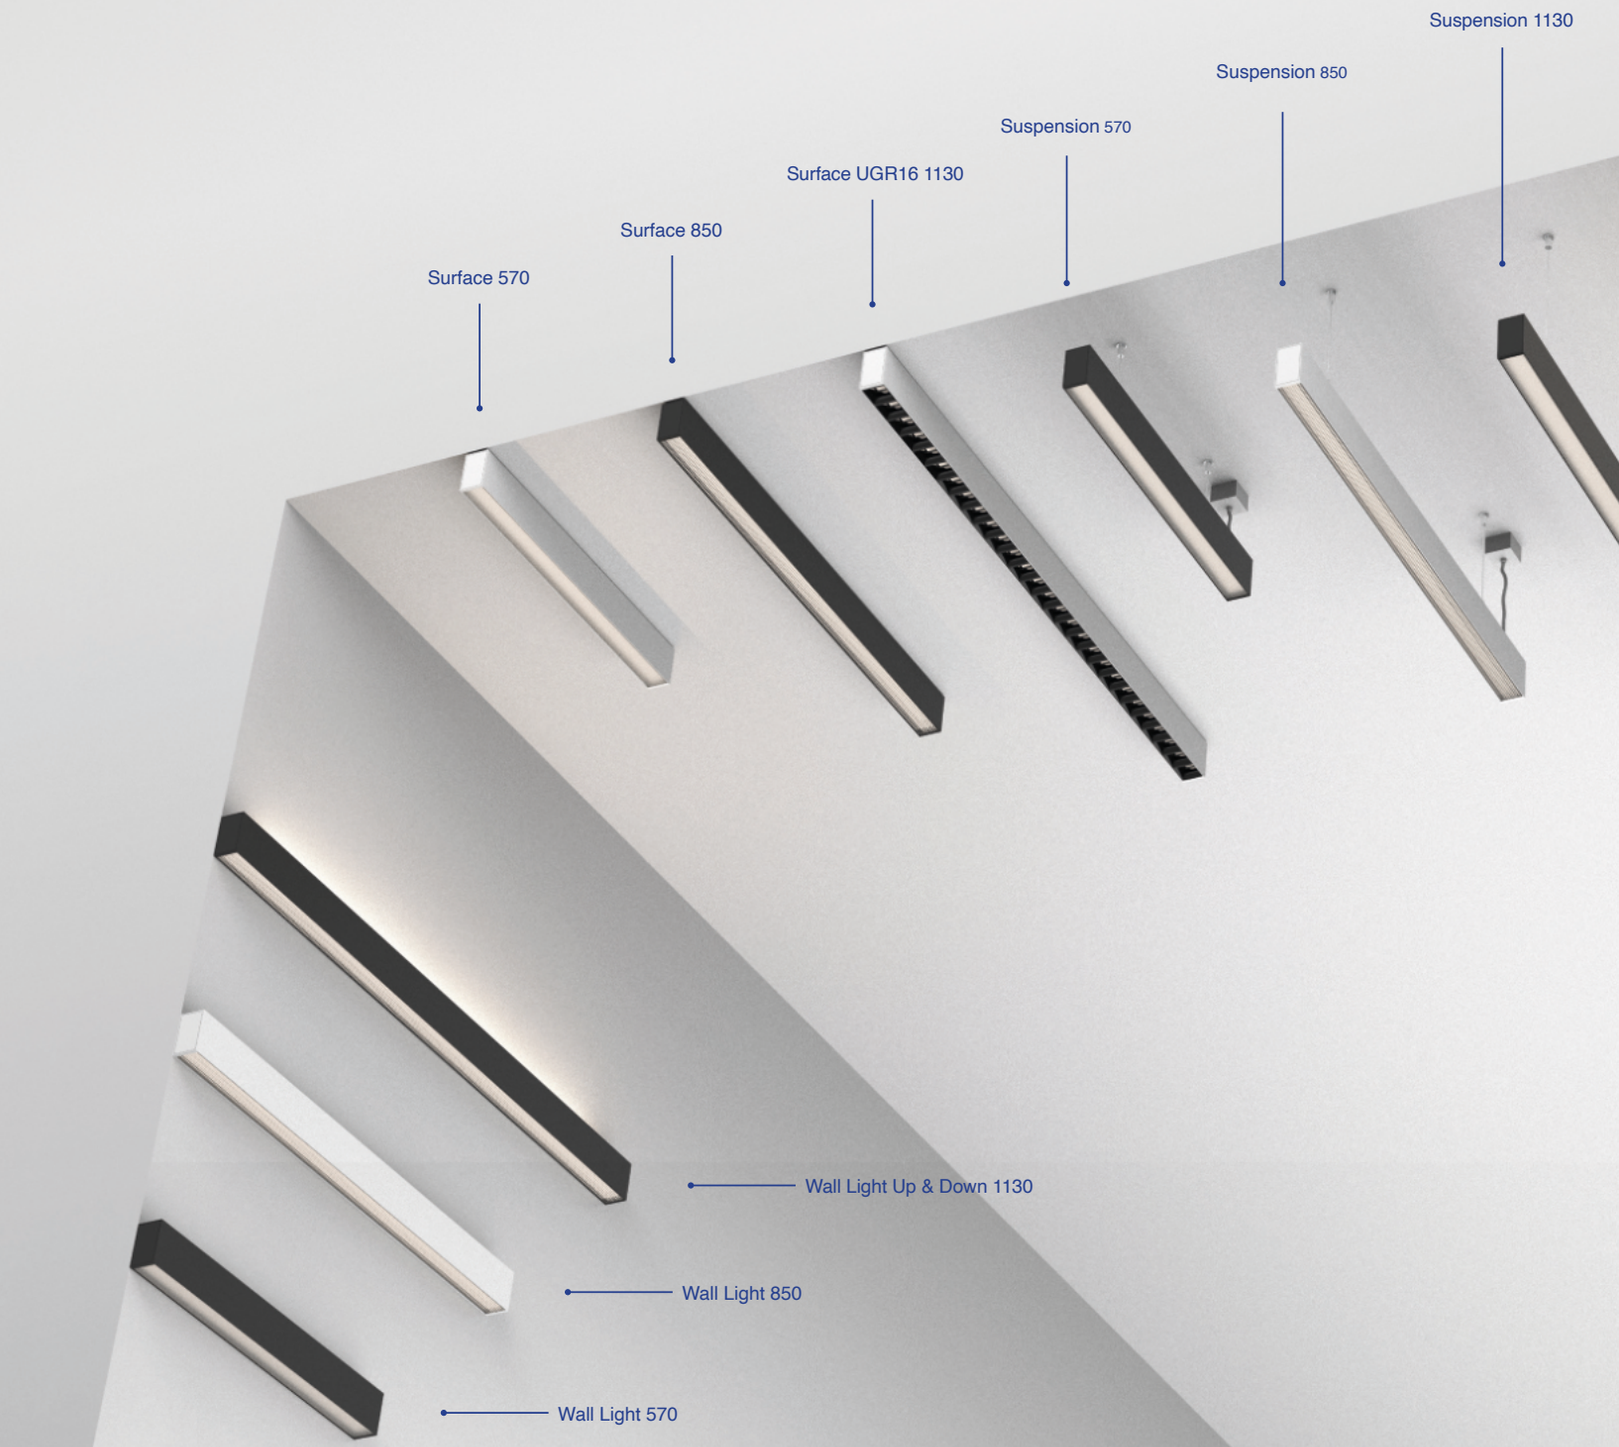
Suspension 1130
Suspension 850
Suspension 570
Surface UGR16 1130
Surface 850
Surface 570
Wall Light Up & Down 1130
Wall Light 850
Wall Light 570

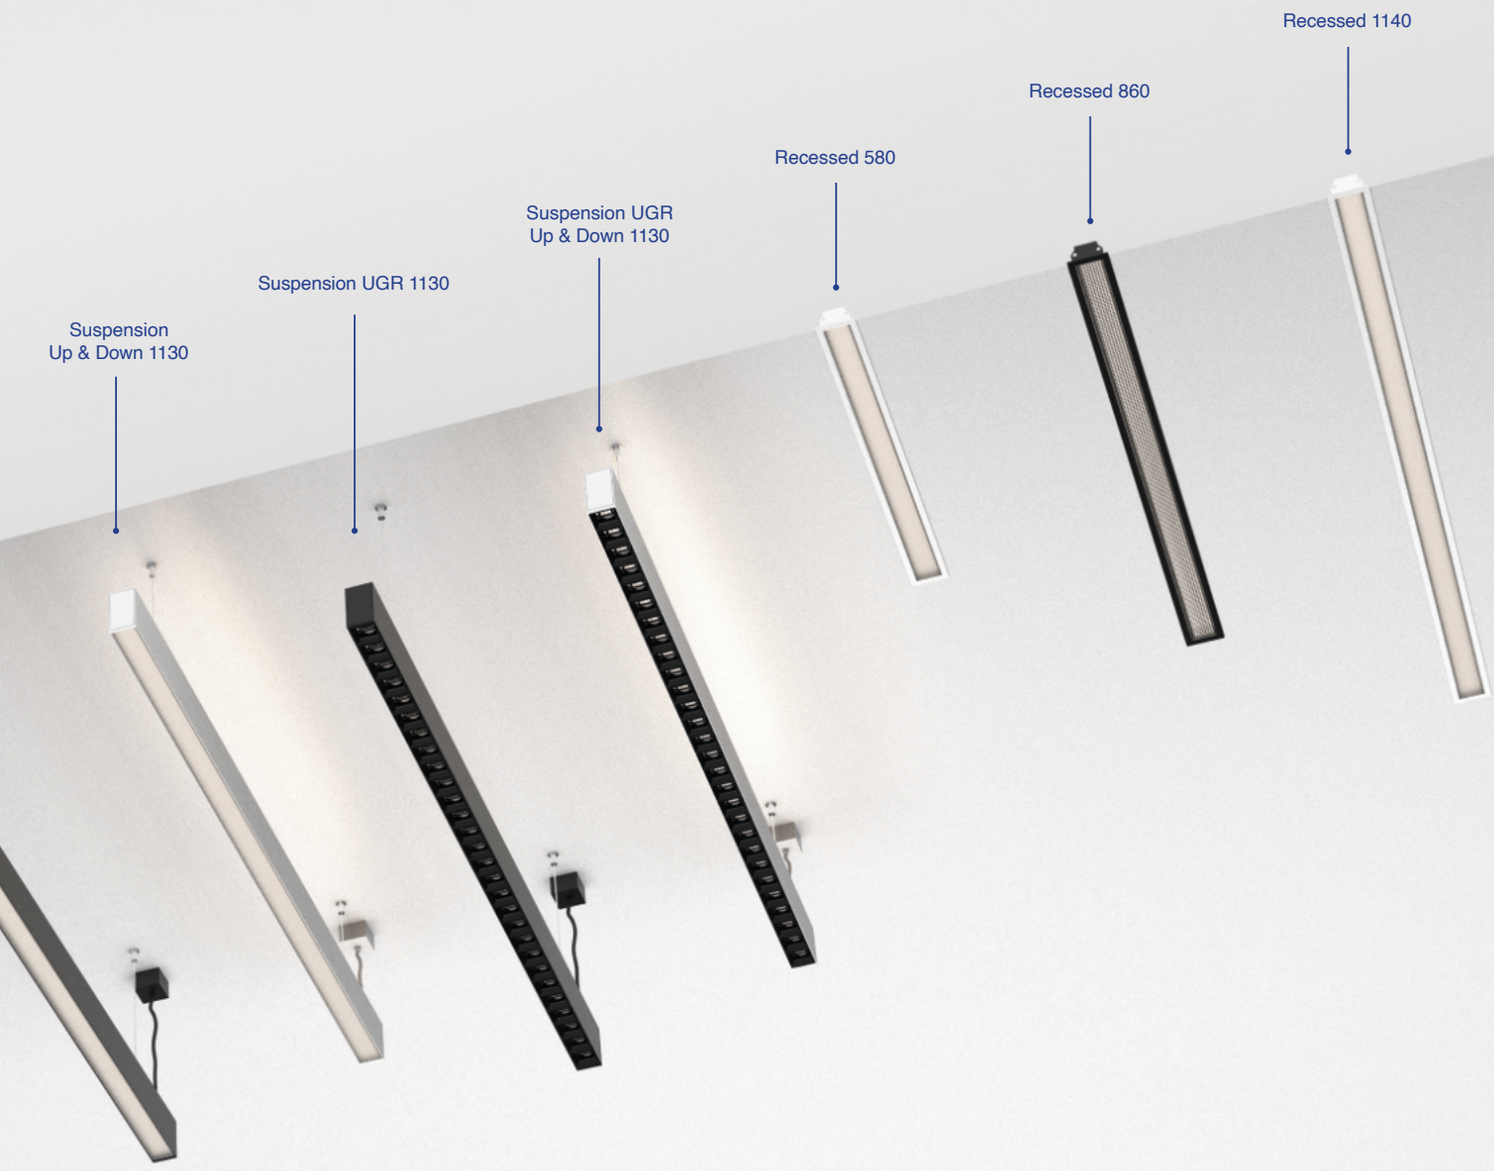

Slight®
slightly different

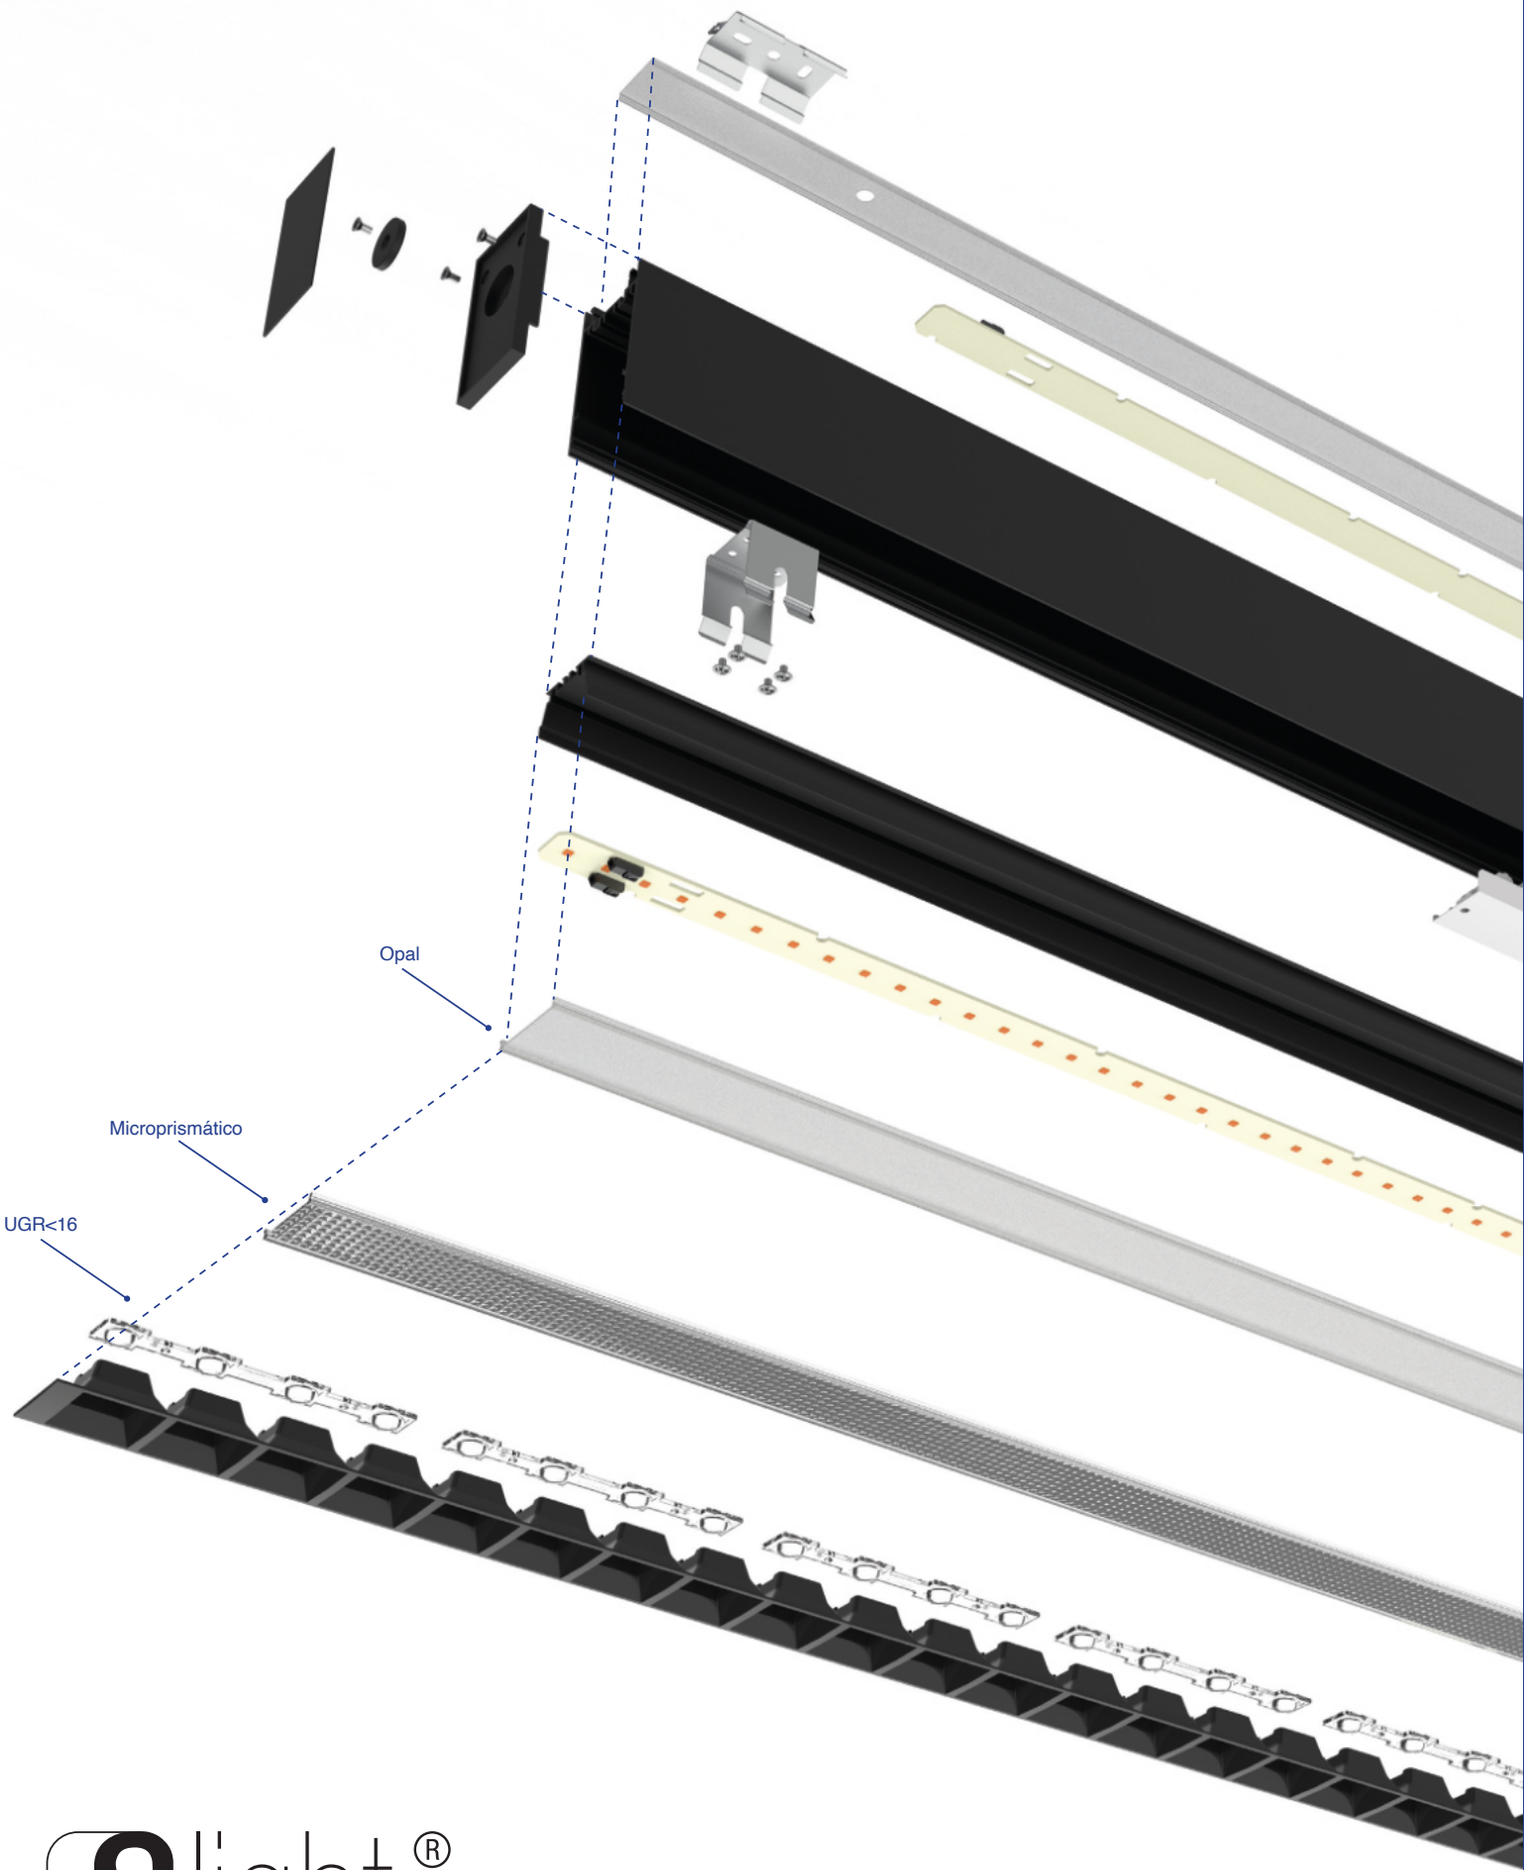

Slight®
slightly different

CONFIGURE YOUR

VIA

Also for your mobile phone

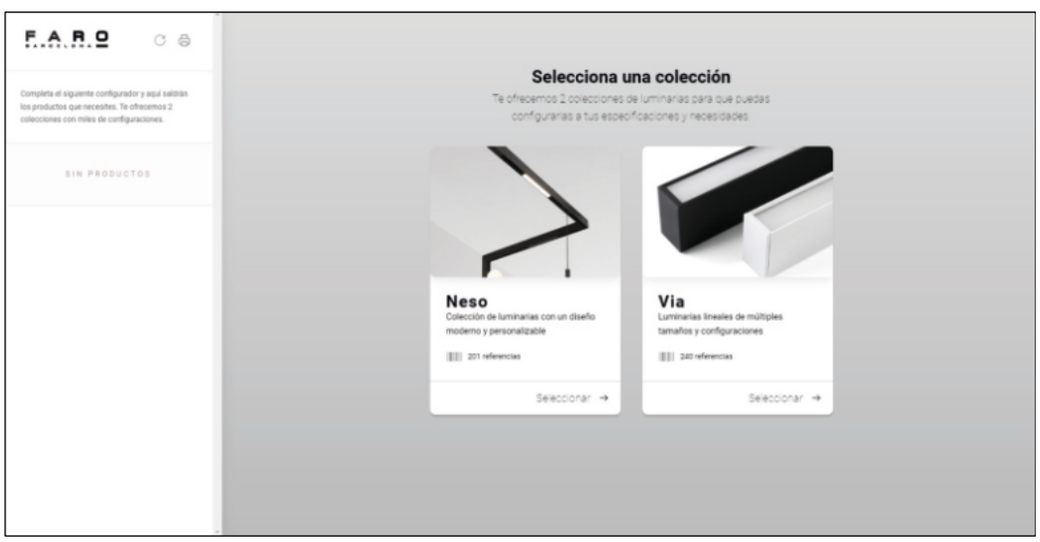




Slight®
slightly different





Pendant Accessory



Pendant Accessory Dali



Continuous Accesory Surface (1 pcs)



Suspension Wire (2 pcs)



L-Shape without light

NEW



End Line Sensor

NEW



Middle Line Sensor

Accesories

	Pendant Accessory	Pendant Accessory Dali	L-Shape Without Light	Continuous Accesory Surface	Suspension Wire	End Line Sensor	Middle Line Sensor
●	040000093	040000095	040000091	040000097	040000098	040000089	040000101
●	040000094	040000096	040000090			040000099	040000100



Residential

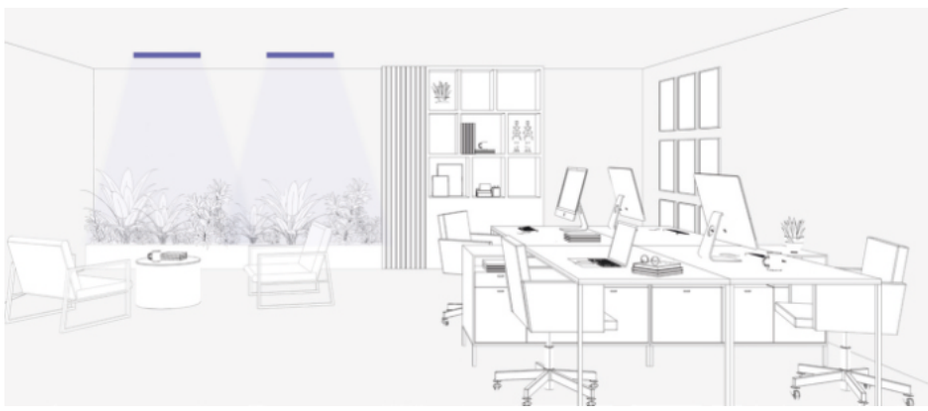

Office

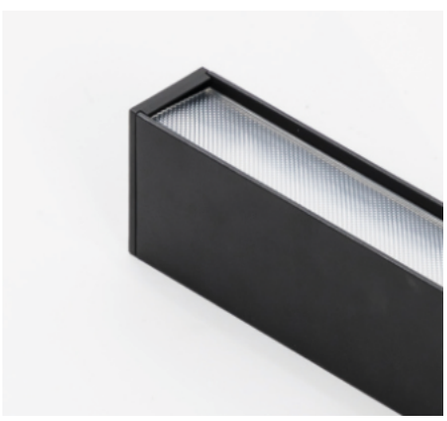

Microprisma



90°

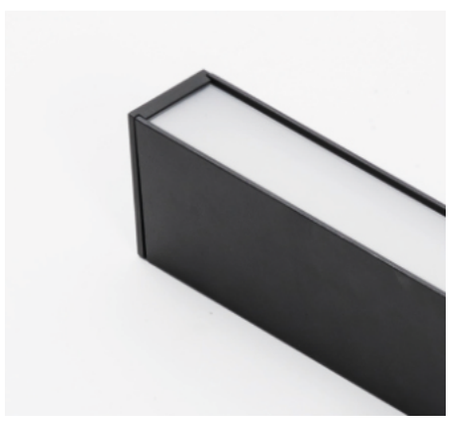

Opal



110°



UGR



50°



80°



Asym°

VIA **SURFACE & SUSPENSION 570**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650ºC





Family	Power		Finish	Control System	Diffuser
04100 Via Evo	**590**	Surface 15W 3000K CRI80	**1** White	**ON/OFF**	Opal
	570	Surface 25W 3000K CRI80	**2** Black	**W** CASAMBI	**U** Microprisma
	680	Surface 15W 4000K CRI80		**D** DALI	
	660	Surface 25W 4000K CRI80			
04101 Via Evo	**010**	Surface 27W 2700-6500K TW	**1** White	**W** CASAMBI	Opal
			2 Black	DALI	**U** Microprisma

04100	**570**	**1**	**W**

Example **041005701W** — Via Evo Surface 570 mm 25W 3000K Opal White

VIA **SURFACE & SUSPENSION 850**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 850ºC





Family	Power		Finish	Control System	Diffuser
04100 Via Evo	**560**	Surface 20W 3000K CRI80	**1** White	**ON/OFF**	Opal
	540	Surface 38W 3000K CRI80	**2** Black	**W** CASAMBI	**U** Microprisma
	650	Surface 20W 4000K CRI80		**D** DALI	
	630	Surface 38W 4000K CRI80			
04101 Via Evo	**030**	Surface 39W 2700-6500K TW	**1** White	**W** CASAMBI	Opal
			2 Black	DALI	**U** Microprisma

VIA **SURFACE & SUSPENSION 1130**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C | UGR 16







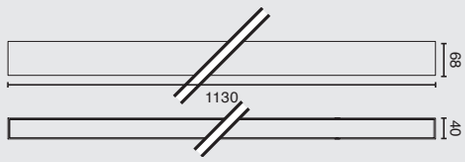

Family		Power		Finish		Control System		Diffuser	
04100	Via Evo	530	Surface 27W 3000K CRI80	1	White		ON/OFF		Opal
		510	Surface 51W 3000K CRI80	2	Black	W	CASAMBI	U	Microprisma
		620	Surface 27W 4000K CRI80			D	DALI		
		600	Surface 51W 4000K CRI80						
	N	LF	Surface Leaf 33W						
04101	Via Evo	050	Surface 48W 2700-6500K TW	1	White	W	CASAMBI		Opal
				2	Black		DALI	U	Microprisma
04102	Via Evo	110	Surface UGR 32W 3000K CRI80	1	White		ON/OFF	8	UGR<19 80°
		120	Surface UGR 32W 4000K CRI80	2	Black	W	CASAMBI	5	UGR<16 50°
		111	Surface UGR 17W 3000K CRI80			D	DALI	0	UGR<19 asim.
		121	Surface UGR 17W 4000K CRI80						
04103	Via Evo	010	Surface UGR 54W 2700-6500K TW	1	White	W	CASAMBI	8	UGR<19 80°
				2	Black		DALI	5	UGR<16 50°
								0	UGR<19 asim.

VIA **L-SHAPE**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 850°C







Accessory		Power		Finish		Control System		Diffuser	
04100	L-shape	961	3000K 15W	1	White		ON/OFF		Opal
		971	4000K 15W	2	Black	W	CASAMBI	U	Microprisma
		981	3000K 25W			D	DALI		
		991	4000K 25W						
04100	L-shape	951	TW 27W	1	White	W	CASAMBI		Opal
				2	Black		DALI	U	Microprisma

Combine different VIA models. See colours to check compatibility of models in "L"installations or continuous lines.



Systems

VIA **UP&DOWN 850**

***Always order Suspension Kit**

incl. DIM 50.000hs L80/B10 MacAdam 3 TW 220-240V 50 / 60Hz 650ºC





Family	Power			Finish		Control System		Diffuser	
04200 Via Evo	540	Up&down 14+38W 3000K CRI80		1	White		ON/OFF		Opal
	630	Up&down 14+38W 4000K CRI80		2	Black	W	CASAMBI	U	Microprisma
						D	DALI		

VIA **UP&DOWN 1130**

***Always order Suspension Kit**

incl. DIM 50.000hs L80/B10 MacAdam 3 TW 220-240V 50 / 60Hz 650ºC





Family	Power			Finish		Control System		Diffuser	
04200 Via Evo	510	Up&down 21+51W 3000K CRI80		1	White		ON/OFF		Opal
	600	Up&down 21+51W 4000K CRI80		2	Black	W	CASAMBI	U	Microprisma
						D	DALI		

VIA **UP&DOWN UGR 1130**

incl. DIM 50.000hs L80/B10 MacAdam 3 TW 220-240V 50 / 60Hz 650°C UGR 16

***Always order Suspension Kit**







Family		Power		Finish		Control System		Diffuser	
04202	Via Evo	**110**	Up&down UGR 24+32W 3000K CRI80	**1**	White		**ON/OFF**	**8**	UGR<19 80°
		120	Up&down UGR 24+32W 4000K CRI80	**2**	Black	**W**	CASAMBI	**5**	UGR<16 50°
						D	DALI	**0**	UGR<19 asim.

VIA **RECESSED 580**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650ºC





Family	Power		Finish	Control System	Diffuser
04100 Via Evo	**770**	Recessed 15W 3000K CRI80	**1** White	(blank) ON/OFF	(blank) Opal
	750	Recessed 25W 3000K CRI80	**2** Black	**W** CASAMBI	**U** Microprisma
	800	Recessed 15W 4000K CRI80		**D** DALI	
	780	Recessed 25W 4000K CRI80			
04101 Via Evo	**020**	Recessed 27W 2700-6500K TW	**1** White	**W** CASAMBI	(blank) Opal
			2 Black	(blank) DALI	**U** Microprisma

VIA **RECESSED 860**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650ºC



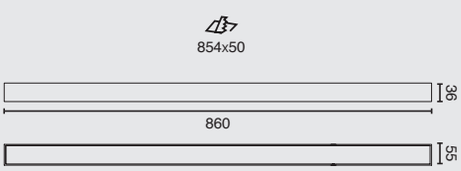

Family	Power		Finish	Control System	Diffuser
04100 Via Evo	**0830**	Recessed 20W 3000K CRI80	**1** White	(blank) ON/OFF	(blank) Opal
	0810	Recessed 38W 3000K CRI80	**2** Black	**W** CASAMBI	**U** Microprisma
	0860	Recessed 20W 4000K CRI80		**D** DALI	
	0840	Recessed 38W 4000K CRI80			
04101 Via Evo	**040**	Recessed 39W 2700-6500K TW	**1** White	**W** CASAMBI	(blank) Opal
			2 Black	(blank) DALI	**U** Microprisma

VIA **RECESSED 1140**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C



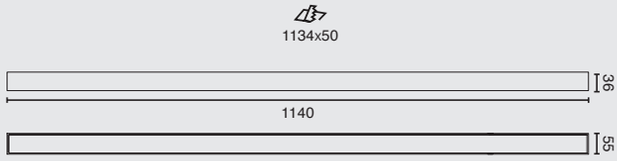

Family	Power		Finish	Control System	Diffuser
04100 Via Evo	**0890**	Recessed 27W 3000K CRI80	**1** White	**ON/OFF**	Opal
	0870	Recessed 51W 3000K CRI80	**2** Black	**W** CASAMBI	**U** Microprisma
	0920	Recessed 27W 4000K CRI80		**D** DALI	
	0900	Recessed 51W 4000K CRI80			
04101 Via Evo	**060**	Recessed 48W 2700-6500K TW	**1** White	**W** CASAMBI	Opal
			2 Black	DALI	**U** Microprisma

VIA **WALL LIGHT 570**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C





Family	Power		Finish	Control System	Diffuser
04100 Via Evo	**595**	Wall Light 15W 3000K CRI80	**1** White	ON/OFF	Opal
	575	Wall Light 25W 3000K CRI80	**2** Black	**W** CASAMBI	
	685	Wall Light 15W 4000K CRI80		**D** DALI	
	665	Wall Light 25W 4000K CRI80			
04101 Via Evo	**015**	Wall Light 27W 2700-6500K TW	**1** White	**W** CASAMBI	Opal
			2 Black	DALI	

VIA **WALL LIGHT 850**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C





Family	Power		Finish	Control System	Diffuser
04100 Via Evo	**565**	Wall Light 20W 3000K CRI80	**1** White	ON/OFF	Opal
	545	Wall Light 38W 3000K CRI80	**2** Black	**W** CASAMBI	
	655	Wall Light 20W 4000K CRI80		**D** DALI	
	635	Wall Light 38W 4000K CRI80			
04101 Via Evo	**035**	Wall Light 39W 2700-6500K TW	**1** White	**W** CASAMBI	Opal
			2 Black	DALI	

VIA **WALL LIGHT 1130**

incl. DIM 50.000hs L80/B10 MacAdam 3 TW 220-240V 50 / 60Hz 650°C





Family	Power		Finish	Control System	Diffuser
04100 Via Evo	**535**	Wall Light 27W 3000K CRI80	**1** White	ON/OFF	Opal
	515	Wall Light 51W 3000K CRI80	**2** Black	**W** CASAMBI	
	625	Wall Light 27W 4000K CRI80		**D** DALI	
	605	Wall Light 51W 4000K CRI80			
04101 Via Evo	**055**	Wall Light 48W 2700-6500K TW	**1** White	**W** CASAMBI	Opal
			2 Black	DALI	
04104 Via Evo (N)	**LF**	Wall Leaf 33W	**1** White	ON/OFF	Opal
			2 Black	**W** CASAMBI	**U** Microprisma
				D DALI	

VIA **WALL LIGHT UP&DOWN 850**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C





Family	Power		Finish		Control System		Diffuser
04200 Via Evo	545	Wall Light Up&Down 14+38W 3000K CRI80	1	White		ON/OFF	Opal
	635	Wall Light Up&Down 14+38W 4000K CRI80	2	Black	W	CASAMBI	
					D	DALI	

VIA **WALL LIGHT UP&DOWN 1130**

incl. | DIM | 50.000hs L80/B10 | MacAdam 3 | TW | 220-240V | 50 / 60Hz | 650°C





Family	Power		Finish		Control System		Diffuser
04200 Via Evo	515	Wall Light Up&Down 21+51W 3000K CRI80	1	White		ON/OFF	Opal
	605	Wall Light Up&Down 21+51W 4000K CRI80	2	Black	W	CASAMBI	
					D	DALI	

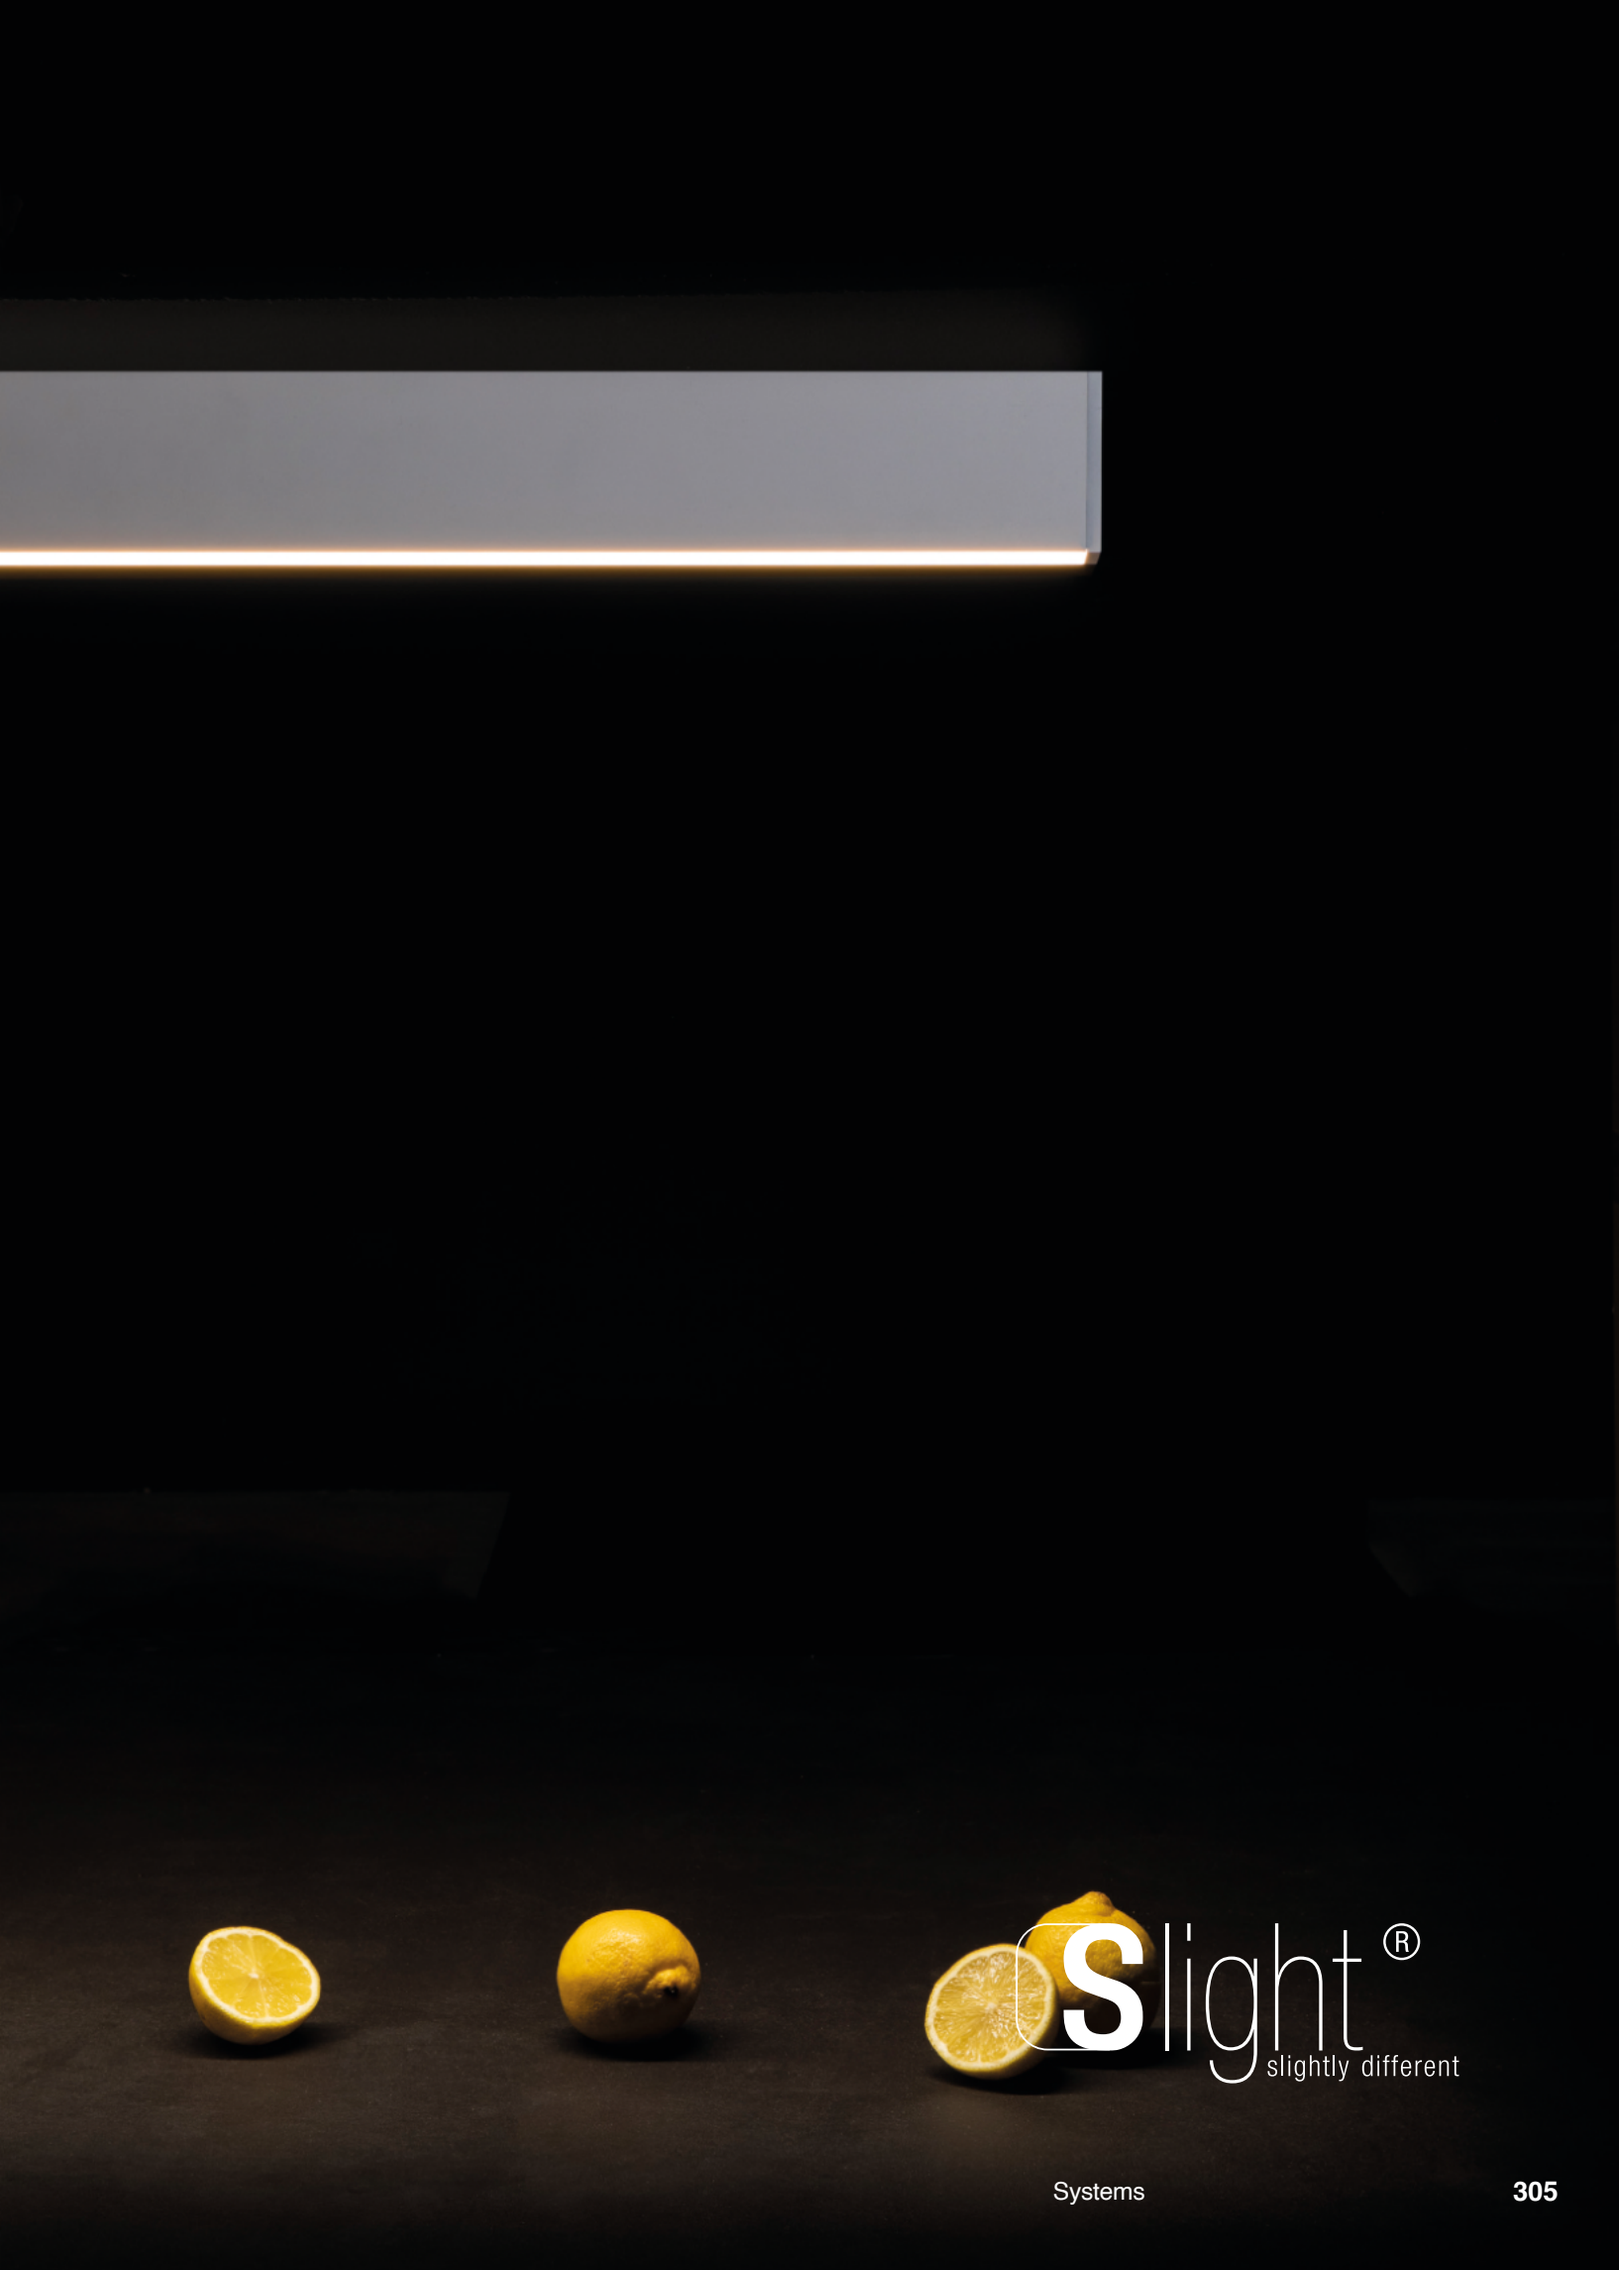
Slight®
slightly different

VIA **SURFACE & SUSPENSION**

570mm

Option	Color T°	CRI	Difusor	Power	Lumen Output	Beam Angle
590	3000K	80	Opal / Microprisma	15W	1392lm / 1133lm	110° / 90°
570		80	Opal / Microprisma	25W	2506m / 2039m	110° / 90°
680	4000K	80	Opal / Microprisma	15W	1434lm / 1167lm	110° / 90°
660		80	Opal / Microprisma	25W	2581lm / 2100lm	110° / 90°
010	2700-6500K	TW	Opal / Microprisma	27W	1964lm / 1598lm	110° / 90°

850mm

560	3000K	80	Opal / Microprisma	20W	2131lm / 1735lm	110° / 90°
540		80	Opal / Microprisma	38W	3809lm/ 3121lm	110° / 90°
650	4000K	80	Opal / Microprisma	20W	2195lm / 1787lm	110° / 90°
630		80	Opal / Microprisma	39W	3923lm / 3214lm	110° / 90°
010	2700-6500K	TW	Opal / Microprisma	39W	2985lm / 2429lm	110° / 90°

1130mm

530	3000K	80	Opal / Microprisma	27W	2842lm / 2313lm	110° / 90°
510		80	Opal / Microprisma	51W	5112lm / 4161lm	110° / 90°
620	4000K	80	Opal / Microprisma	27W	2927lm / 2382lm	110° / 90°
600		80	Opal / Microprisma	51W	5265lm / 4286lm	110° / 90°
050	2700-6500K	TW	Opal / Microprisma	48W	4006lm / 3261lm	110° / 90°
110	3000K	80	UGR<16 / UGR<19	32W	3989lm / 4104lm / 3739lm	50° / 80° / Asym
120	4000K	80	UGR<16 / UGR<19	32W	4109lm / 4227lm / 3851lm	50° / 80° / Asym
010	2700-6500K	TW	UGR<16 / UGR<19	54W	4830lm / 4881lm / 4467lm	50° / 80° / Asym

VIA **UP&DOWN**

850mm

Option	Color T°	CRI	Difusor	Power	Lumen Output	Beam Angle
540	3000K	80	Opal / Microprisma	14 + 38W	1240 + 3809lm / 1323 + 3121lm	110° / 90°
630	4000K	80	Opal / Microprisma	14 + 38W	1278 + 3923lm / 1363 + 3214lm	110° / 90°
030	2700-6500K	TW	Opal / Microprisma	9 + 39W	720 + 2985lm / 738 + 2429lm	110° / 90°

1130mm

510	3000K	80	Opal / Microprisma	21 + 51W	2794 + 5112lm / 2794 + 4161lm	110° / 90°
600	4000K	80	Opal / Microprisma	21 + 51W	2878 + 5265lm / 2878 + 4286lm	110° / 90°
050	2700-6500K	TW	Opal / Microprisma	18 + 48W	2395 + 4006lm / 2395 + 3261lm	110° / 90°

1130mm

110	3000K	80	UGR<16 / UGR<19	24 + 32W	2794 + 3989lm / 2794 + 4104lm / 2794 + 3739lm	50° / 80° / Asym
120	4000K	80	UGR<16 / UGR<19	24 + 32W	2878 + 4109lm / 2878 + 4227lm / 2878 + 3851lm	50° / 80° / Asym
010	2700-6500K	TW	UGR<16 / UGR<19	18 + 54W	2395 + 4830lm / 2395 + 4881lm / 2395 + 4467lm	50° / 80° / Asym

VIA **WALL LIGHT UP&DOWN**

850mm

Option	Color T°	CRI	Difusor	Power	Lumen Output	Beam Angle
545	3000K	80	Opal	14+38W	1240 + 3809lm	110°
635	4000K	80	Opal	14+38W	1278 + 3923lm	110°
035	2700-6500K	TW	Opal	9+39W	720 + 2985lm	110°

1130mm

515	3000K	80	Opal	21+51W	2794 + 5112lm	110°
605	4000K	80	Opal	21+51W	2878 + 5265lm	110°
055	2700-6500K	TW	Opal	18+48W	2395 + 4006lm	110°

VIA **RECESSED**

580mm

Option	Color T°	CRI	Difusor	Power	Lumen Output	Beam Angle
770	3000K	80	Opal / Microprisma	15W	1392lm / 1133lm	110° / 90°
750		80	Opal / Microprisma	25W	2506m / 2039m	110° / 90°
800	4000K	80	Opal / Microprisma	15W	1434lm / 1167lm	110° / 90°
780		80	Opal / Microprisma	25W	2581lm / 2100lm	110° / 90°
020	2700-6500K	TW	Opal / Microprisma	27W	1964lm / 1598lm	110° / 90°

860mm

0830	3000K	80	Opal / Microprisma	20W	2131lm / 1735lm	110° / 90°
0810		80	Opal / Microprisma	38W	3809lm/ 3121lm	110° / 90°
0860	4000K	80	Opal / Microprisma	20W	2195lm / 1787lm	110° / 90°
0840		80	Opal / Microprisma	38W	3923lm / 3214lm	110° / 90°
040	2700-6500K	TW	Opal / Microprisma	39W	2985lm / 2429m	110° / 90°

1140mm

0890	3000K	80	Opal / Microprisma	27W	2842lm / 2313lm	110° / 90°
0870		80	Opal / Microprisma	51W	5112lm / 4161lm	110° / 90°
0920	4000K	80	Opal / Microprisma	27W	2927lm / 2382lm	110° / 90°
0900		80	Opal / Microprisma	51W	5265lm / 4286lm	110° / 90°
060	2700-6500K	TW	Opal / Microprisma	48W	4006lm / 3261lm	110° / 90°

VIA **WALL LIGHT**

570mm

Option	Color T°	CRI	Difusor	Power	Lumen Output	Beam Angle
595	3000K	80	Opal	15W	1392lm	110°
575		80	Opal	25W	2506m	110°
685	4000K	80	Opal	15W	1434lm	110°
665		80	Opal	25W	2581lm	110°
015	2700-6500K	TW	Opal	27W	1964lm	110°

850mm

565	3000K	80	Opal	20W	2131lm	110°
545		80	Opal	38W	3809lm	110°
655	4000K	80	Opal	20W	2195lm	110°
635		80	Opal	38W	3923lm	110°
035	2700-6500K	TW	Opal	39W	2985lm	110°

1130mm

535	3000K	80	Opal	27W	2842lm	110°
515		80	Opal	51W	5112lm	110°
625	4000K	80	Opal	27W	2927lm	110°
605		80	Opal	51W	5265lm	110°
055	2700-6500K	TW	Opal	48W	4006lm	110°



110°



90°



50°



80°



Asym°

NOTES

Slight®
slightly different

Projet

Date

Référence

Projet

Date

Référence

Projet

Date

Référence

Projet

Date

Référence

Projet

Date

Référence

Projet

Date

Référence

Projet

Date

Référence

Projet

Date

Référence





SLIGHT®
Chemin de la Veyre d'en haut D2
1806 St-Légier — Switzerland
+41 21 925 38 88
www.slight.ch
info@slight.ch

FARO