

SLIGHT

FLOW M15 CATALOG

2025

slightly different



Slight[®]
slightly different



Delicate surface treatment process

Lamps/tracks/electrical appliances are all made of metal using anodized surface treatment process, which is more delicate and beautiful

Ultra-thin and slim Easy to hide

The slim exterior has a sophisticated structure,
simple design, exquisite craftsmanship,
and make the interior space more elegant



4 types of tracks

5 installation methods


A wide range of installation options are equipped with a variety of corner connectors to bring more creativity to the interior space




Orbital standard specifications




TLS-MS15Exposed tracks




TLS-MR15AEmbedded tracks








TLS-MR15BEmbed tracks



TLS-MSR15Lifting rails



Schematic diagram of rail installation

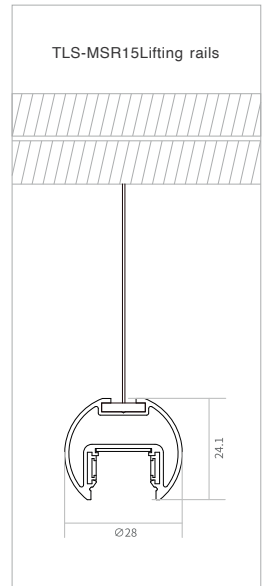



Slight®
slightly different



A
Point light
Model: M15D



D
Adjustable grille light
Model: M15G(A)



G
Bulb light
Model: M15IB



B
Linear floodlights
Model: M15FD



E
Grille lights
Model: M15G



H
Double-headed
spotlights
Model: M15S(D)



C
Anti-glare point light
Model: M15D(P)




F
Chandelier lights
Model: M15I



I
Spotlights
Model: M15S


Lamps can be equipped with DIY at will


With the modular concept,
it can be matched with different luminaires to
meet the lighting needs of different spaces

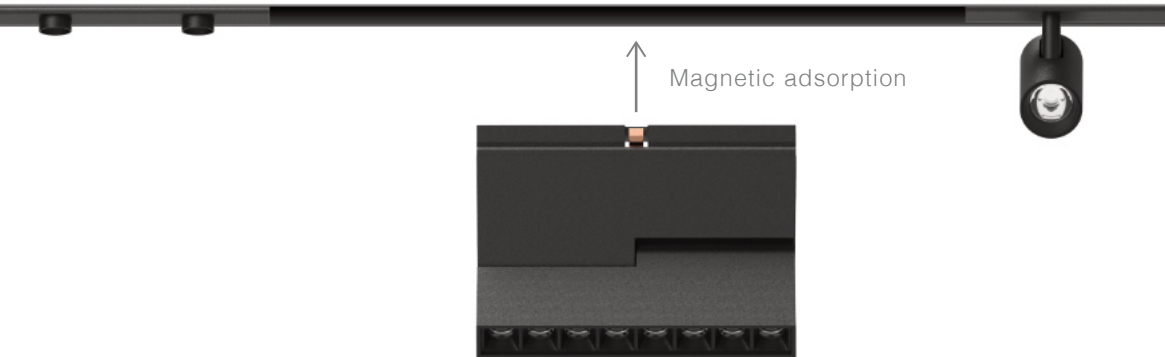

Stable and reliable

The use of strong magnetism imported from Germany ensures the safety and reliability of the lamp after installation. The lifting and unloading force of the lamp is uniform and convenient.

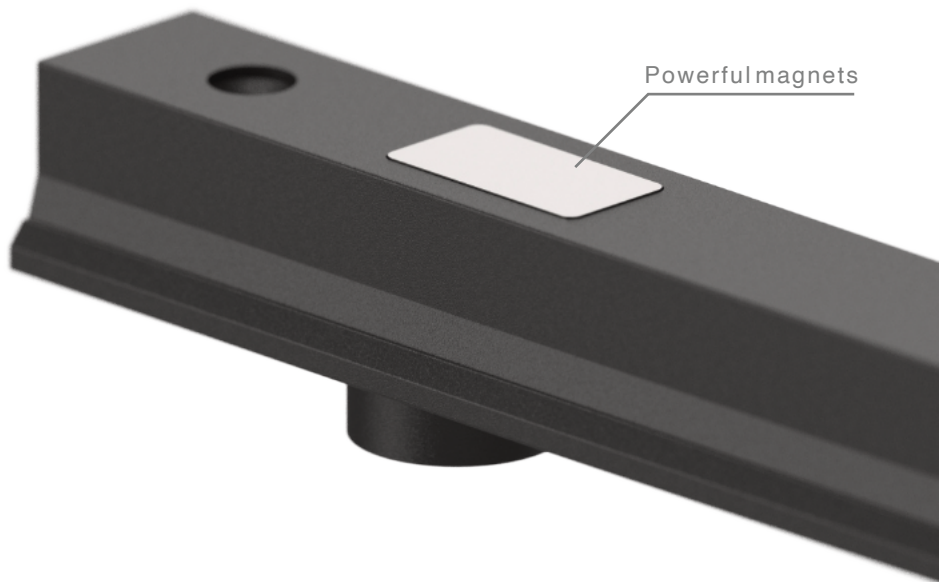

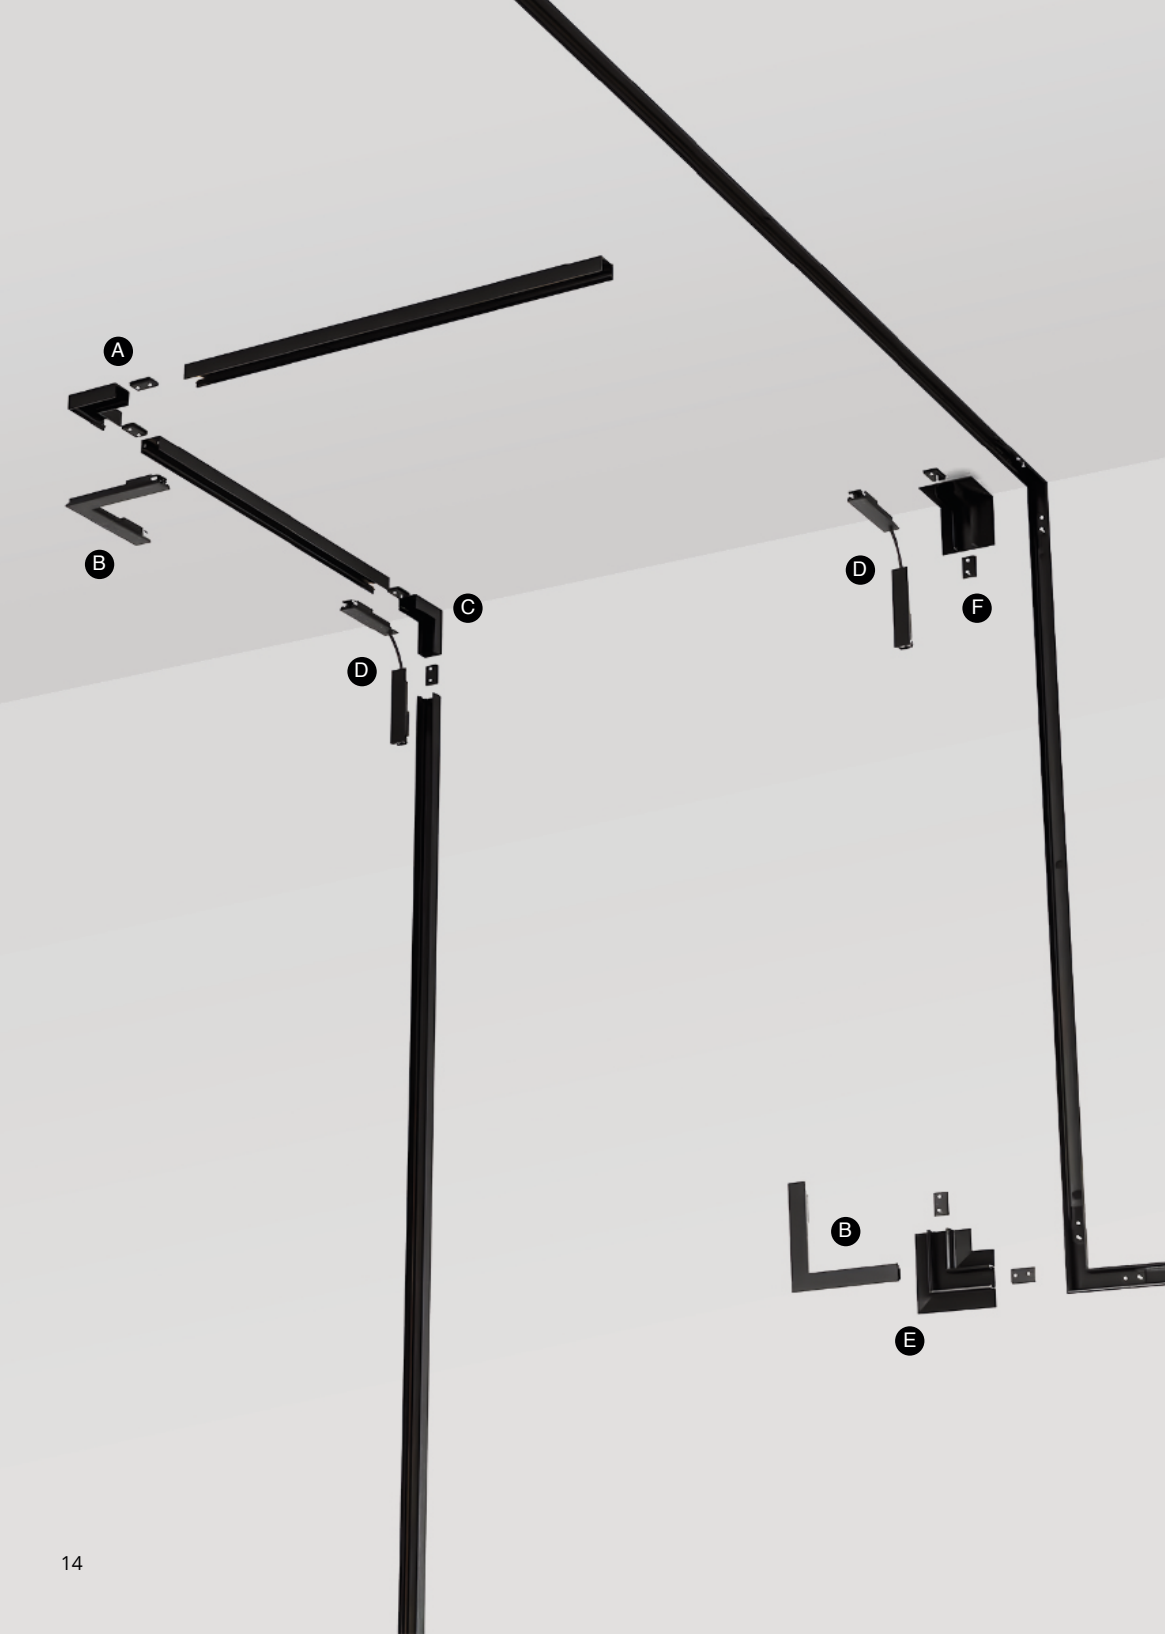

A

B

C

D

D

F

B

E



Exposed tracks

Model: TLS-MS15



A
Horizontal corners
of exposed tracks

Model: L90-MS15



B
Horizontal corner
power-on connectors

Model: TLS-M1504




C
Corner inside
exposed track

Model: L90N-MS15



D
Flexible energized
connectors

Model: TLS-M1503



Embedded tracks

Model: TLS-MR15A



E
Horizontal corners
of embedded tracks

Model: L90-MR15A



B
Horizontal corner
power-on connectors

Model: TLS-M1504



F
Corners inside
embedded tracks


Model: L90N-MR15A



D
Flexible energized
connectors

Model: TLS-M1503

*The embedded track and embedded track splicing methods are the same



Embed tracks

Model: TLS-MR15B



E
Embedded track
horizontal corner

Model: L90-MR15B



B
Horizontal corner
power-on connectors

Model: TLS-M1504




















F
Embedded in the
corner of the track

Model: L90N-MR15B




D
Flexible energized
connectors

Model: TLS-M1503

TLS-M15	Model	Size	Light source	CCT	CRI	Beam angle	Input voltage	Power	Luminous flux	Light efficiency			
	M15FD-300	300*15*11.5mm	SMD	3000K 4000K	90 RA	110°	48V	6W	168lm (3000K)	28LM/W			
	M15FD-600	600*15*11.5mm						12W	336lm (3000K)	28LM/W			
	M15D-300	300*15*11.5mm				SMD		38° 65°	6W	450lm (3000K)	75LM/W		
	M15D-600	600*15*11.5mm							12W	900lm (3000K)	75LM/W		
	M15D(P)-300	300*15*16.5mm							SMD	24° 36°	6W	390lm (3000K)	65LM/W
	M15D(P)-600	600*15*16.5mm									12W	780lm (3000K)	65LM/W
	M15S-22	φ22*50mm	SMD			30° 36°		24° 36°	3W	135lm (3000K)	45LM/W		
	M15S-22(D)	φ22*50mm							2*3W	2*135lm (3000K)	45LM/W		
	M15S-32	φ32*58mm	COB					30° 36°	24° 36°	5W	300lm (3000K)	60LM/W	
	M15SS-32(D)	φ32*58mm								2*5W	2*300lm (3000K)	60LM/W	
	M15S-42	φ42*58mm								7W	420lm (3000K)	60LM/W	
	M15G-110	110*16*35mm	SMD					30°	30°	8W	560lm (3000K)	70LM/W	
	M15G-220	220*16*35mm								16W	1120lm (3000K)	70LM/W	
	M15G(A)-110	112*16*87mm								8W	560lm (3000K)	70LM/W	
	M15G(A)-220	220*16*87mm								16W	1120lm (3000K)	70LM/W	
	M15I-90	1200*φ90*95mm	COB					30°	30°	5W	275lm (3000K)	55LM/W	
	M15IB-80	1200*φ80mm								3W	210lm (3000K)	70LM/W	

M15FD



Basic Parameters

Material	ADC12
Surface Processing	Sandblasting
Size	300x15x11.5mm 600x15x11.5mm

Photo-electric Parameters

Model	M15FD
Light source	SMD
Input voltage	48V
Power	6W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	110°
Light efficiency*	28LM/W
Luminous flux*	168LM

*Light efficiency & Luminous flux parameters based on 3000K Light source
4000K Light efficiency & Luminous flux = 3000K * 1.08






Photo-electric Parameters

Model	M15FD
Light source	SMD
Input voltage	48V
Power	12W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	110°
Light efficiency*	28LM/W
Luminous flux*	336LM

*Light efficiency & Luminous flux parameters based on 3000K Light source
4000K Light efficiency & Luminous flux = 3000K * 1.08



M15D



Basic Parameters

Material	ADC12
Surface Processing	Sandblasting
Size	300x15x11.5mm 600x15x11.5mm

Photo-electric Parameters

Model	M15D
Light source	SMD
Input voltage	48V
Power	6W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	38°/65°
Light efficiency*	75LM/W
Luminous flux*	450LM

* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux = 3000K * 1.08








Photo-electric Parameters

Model	M15D
Light source	SMD
Input voltage	48V
Power	12W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	38°/65°
Light efficiency*	75LM/W
Luminous flux*	900LM

* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux = 3000K * 1.08



M15D(P)

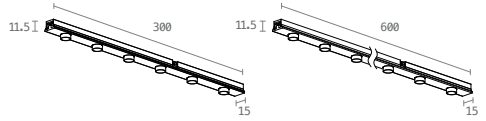

Basic Parameters

Material	ADC12
Surface Processing	Sandblasting
Size	300x15x11.5mm 600x15x11.5mm

Photo-electric Parameters

Model	M15D(P)
Light source	SMD
Input voltage	48V
Power	6W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	38°/65°
Light efficiency*	65LM/W
Luminous flux*	390LM

*Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux=3000K*1.08








Photo-electric Parameters

Model	M15D(P)
Light source	SMD
Input voltage	48V
Power	12W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	38°/65°
Light efficiency*	65LM/W
Luminous flux*	780LM

*Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux=3000K*1.08



M15G



Basic Parameters

Material	ADC12
Surface Processing	Sandblasting
Size	110x16x35mm 220x16x35mm

Photo-electric Parameters

Model	M15G
Light source	SMD
Input voltage	48V
Power	8W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	30°
Light efficiency*	70LM/W
Luminous flux*	560LM

* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux = 3000K * 1.08






Photo-electric Parameters

Model	M15G
Light source	SMD
Input voltage	48V
Power	16W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	30°
Light efficiency*	70LM/W
Luminous flux*	1120LM

* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux = 3000K * 1.08



M15G(A)

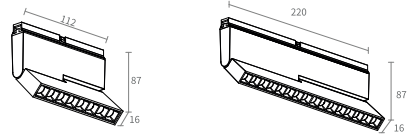

Basic Parameters

Material	ADC12
Surface Processing	Sandblasting
Adjustable angle	90°
Size	112x16x87mm 220x16x87mm

Photo-electric Parameters

Model	M15G(A)
Light source	SMD
Input voltage	48V
Power	8W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	30°
Light efficiency*	70LM/W
Luminous flux*	560LM

*Light efficiency & Luminous flux parameters based on 3000K Light source
4000K Light efficiency & Luminous flux = 3000K * 1.08






Photo-electric Parameters

Model	M15G(A)
Light source	SMD
Input voltage	48V
Power	16W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	30°
Light efficiency*	70LM/W
Luminous flux*	1120LM

*Light efficiency & Luminous flux parameters based on 3000K Light source
4000K Light efficiency & Luminous flux = 3000K * 1.08



M15S

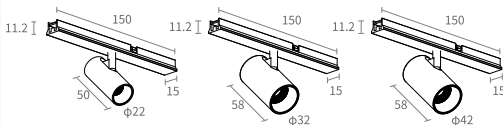

Basic Parameters

Material	ADC12
Surface Processing	Sandblasting
Adjustable angle	Vertical 90°/ horizontal 350°
Size	φ22x50mm φ32x58mm φ42x58mm

Photo-electric Parameters

Model	M15S-22
Light source	SMD
Input voltage	48V
Power	3W
CRI	Ra>90
CCT	3000K/4000K

Beam angle 24°/36°

Light efficiency*45LM/W

Luminous flux* 135LM

* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux=3000K*1.08





Photo-electric Parameters

Model	M15S-32
Light source	COB
Input voltage	48V
Power	5W
CRI	Ra>90
CCT	3000K/4000K

Beam angle 30°/36°

Light efficiency*60LM/W

Luminous flux* 300LM

* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux=3000K*1.08





Photo-electric Parameters



Model	M15S-40
Light source	COB
Input voltage	48V
Power	7W
CRI	Ra>90
CCT	3000K/4000K

Beam angle 24°/36°

Light efficiency*60LM/W

Luminous flux* 420LM

* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux=3000K*1.08



M15S(D)



Basic Parameters

Material	ADC12
Surface Processing	Sandblasting
Adjustable angle	Vertical 90°/ horizontal 350°
Size	φ22x50mm*2 φ32x58mm*2

Photo-electric Parameters

Model	M15S-22(D)
Light source	SMD
Input voltage	48V
Power	2*3W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	24°/36°
Light efficiency*	45LM/W
Luminous flux*	270LM

*Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux=3000K*1.08








Photo-electric Parameters

Model	M15S-32(D)
Light source	COB
Input voltage	48V
Power	2*5W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	30°/36°
Light efficiency*	60LM/W
Luminous flux*	600LM

*Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux=3000K*1.08



M15IB

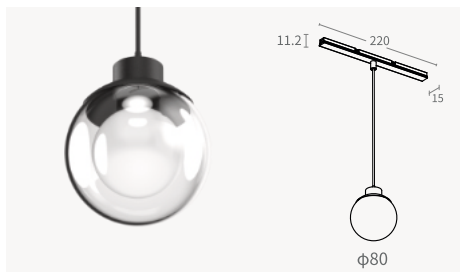

Basic Parameters

Material	ADC12
Surface Processing	Sandblasting
Size	φ80 mm
Hanging wire length	1200mm

Photo-electric Parameters

Model	M15IB
Light source	COB
Input voltage	48V
Power	3W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	360°
Light efficiency*	70LM/W
Luminous flux*	210LM

* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux = 3000K * 1.08

M15I




Basic Parameters


Material	ADC12
Surface Processing	Sandblasting
Size	φ90x95mm
Hanging wire length	1200mm


Photo-electric Parameters


Model	M15I
Light source	COB
Input voltage	48V
Power	5W
CRI	Ra>90
CCT	3000K/4000K
Beam angle	30°
Light efficiency*	55LM/W
Luminous flux*	275LM


* Light efficiency & Luminous flux parameters based on 3000K Light source
400K Light efficiency & Luminous flux = 3000K * 1.08

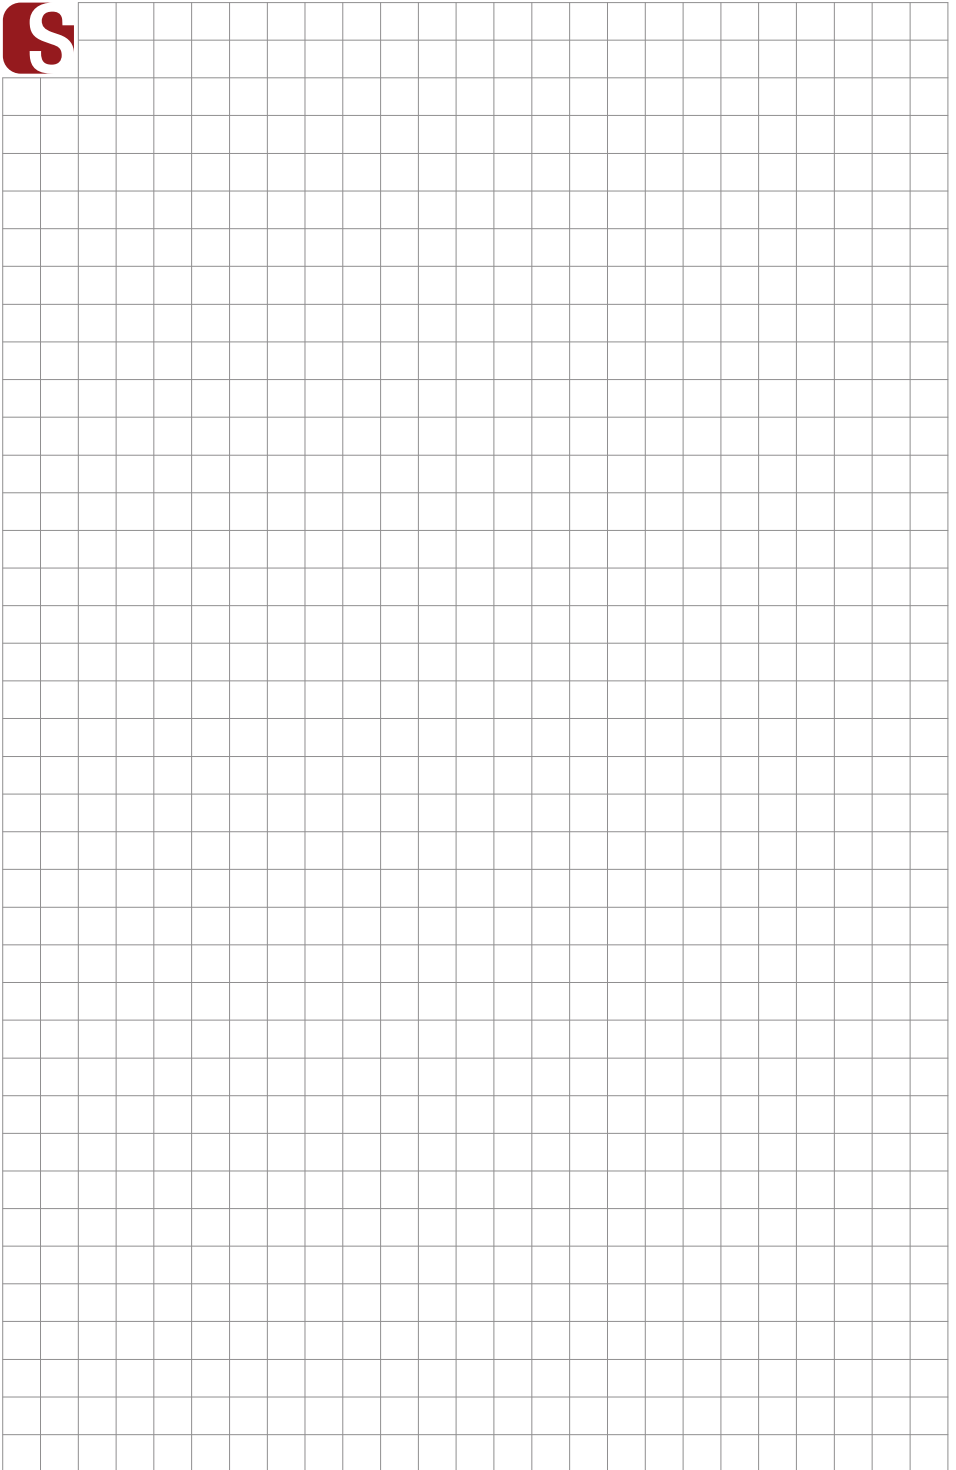


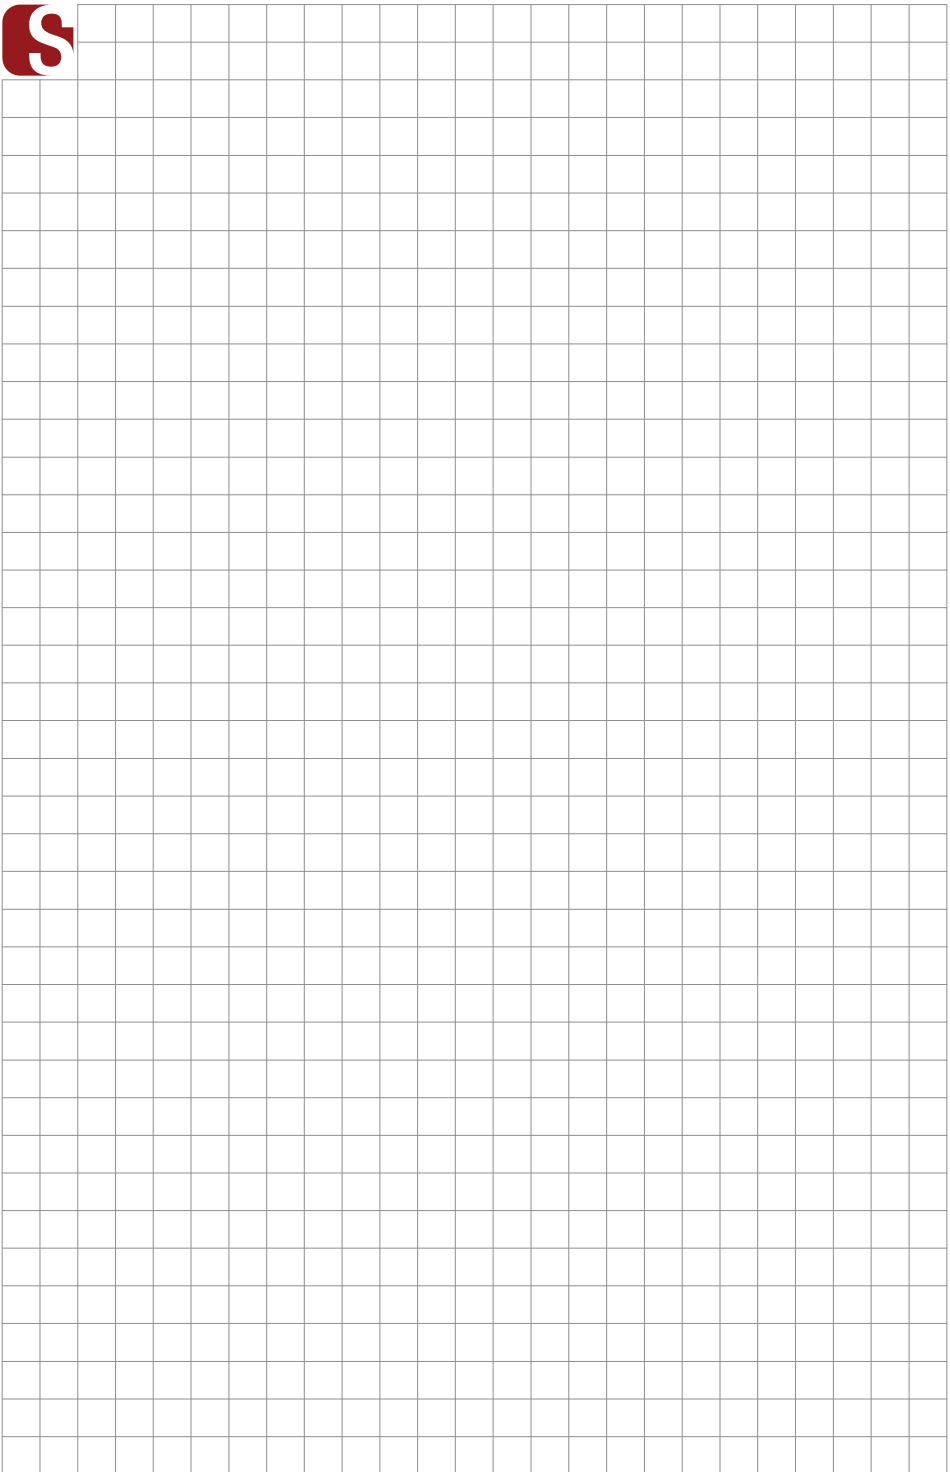


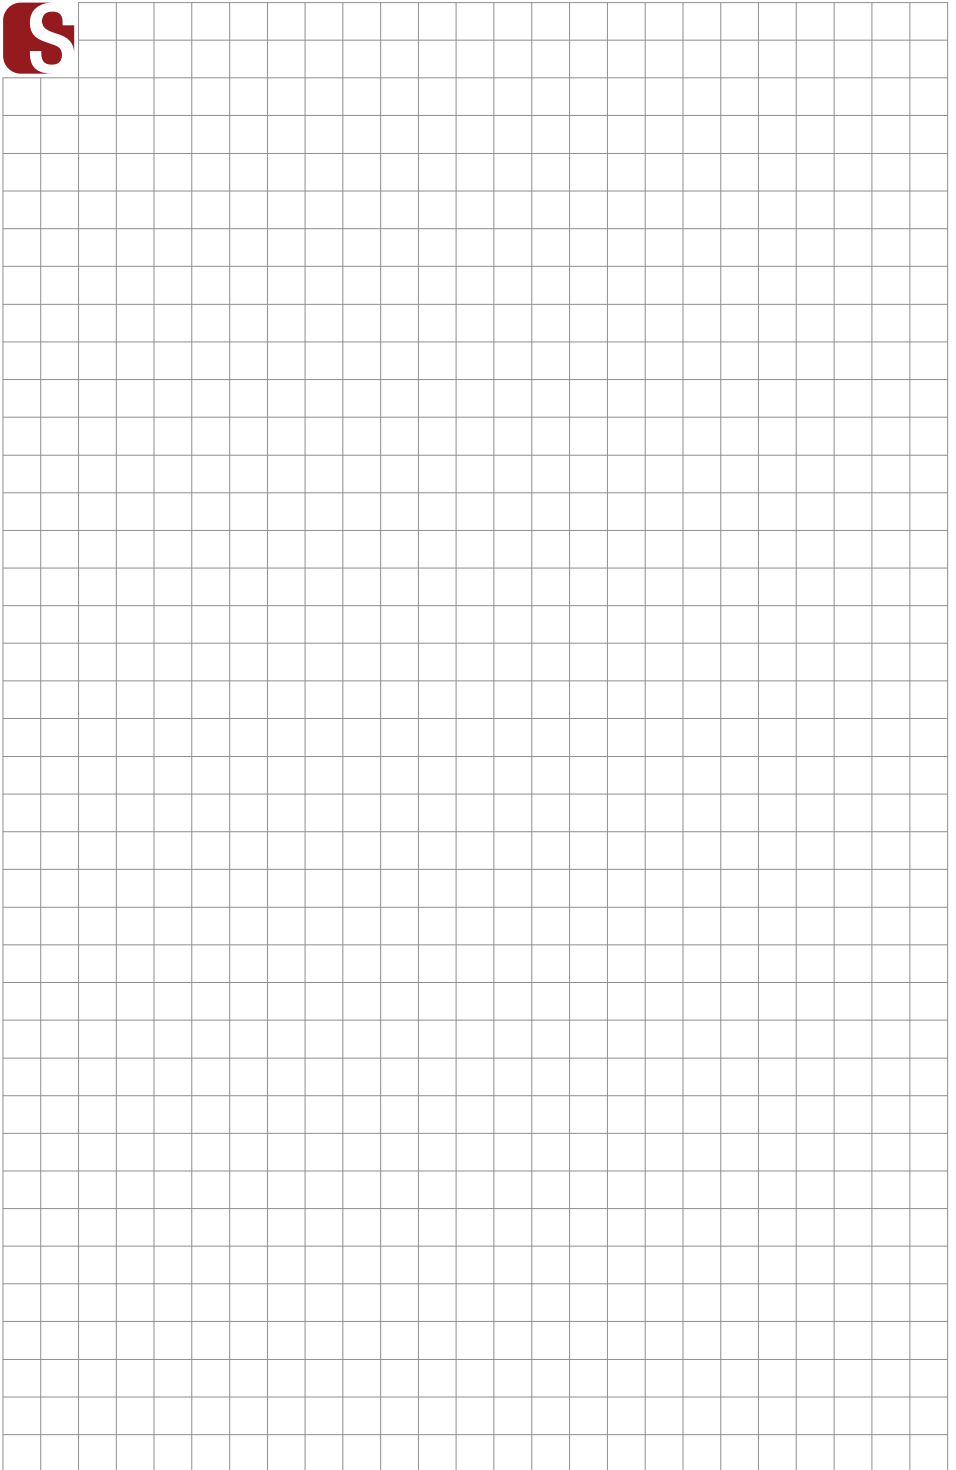


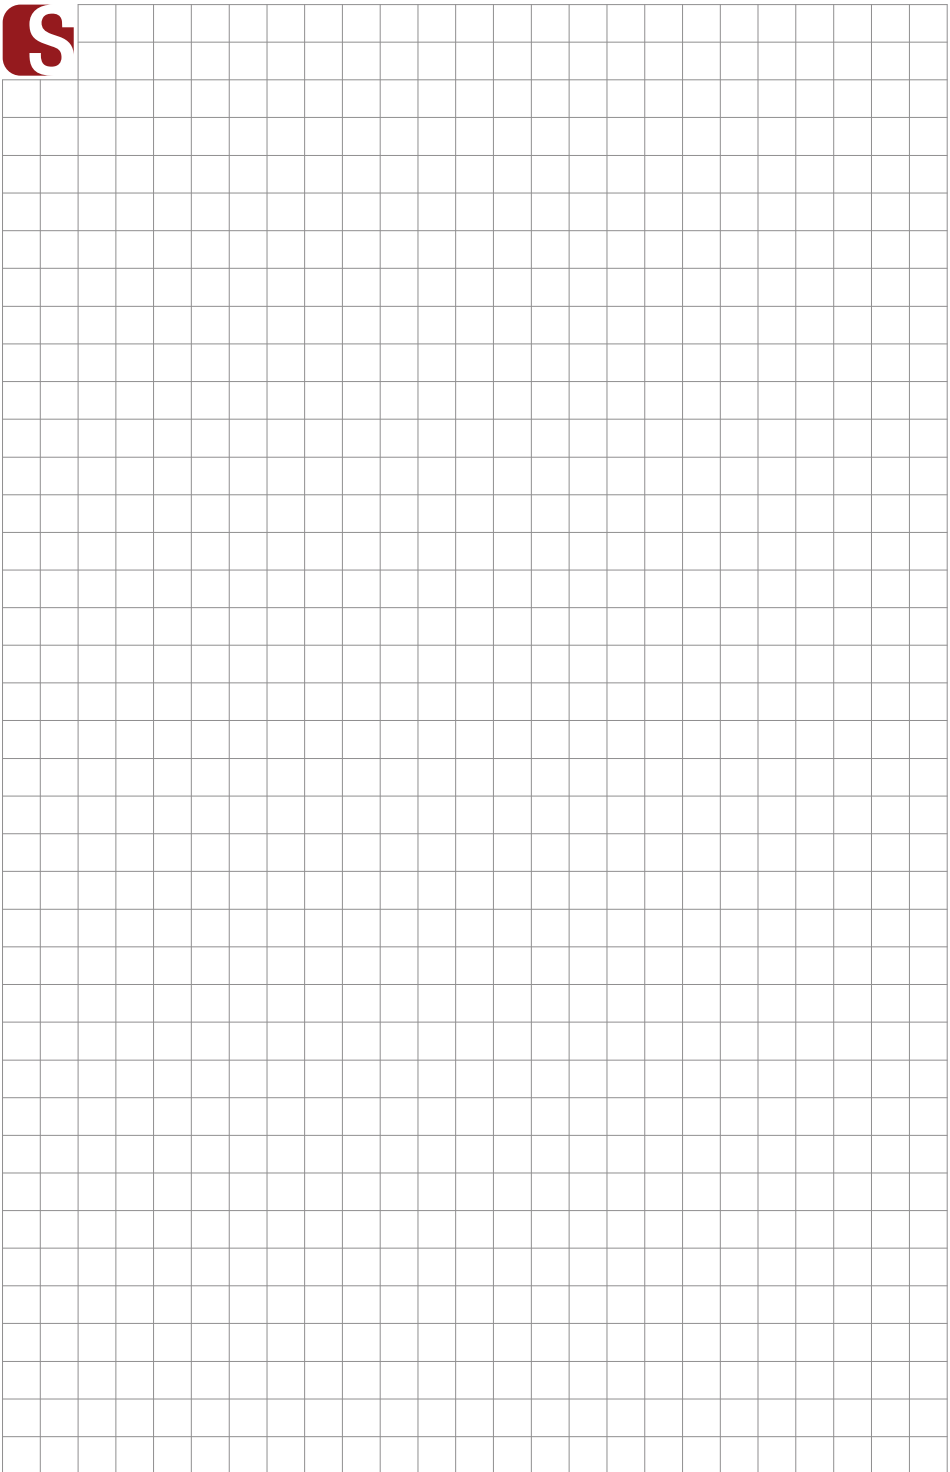

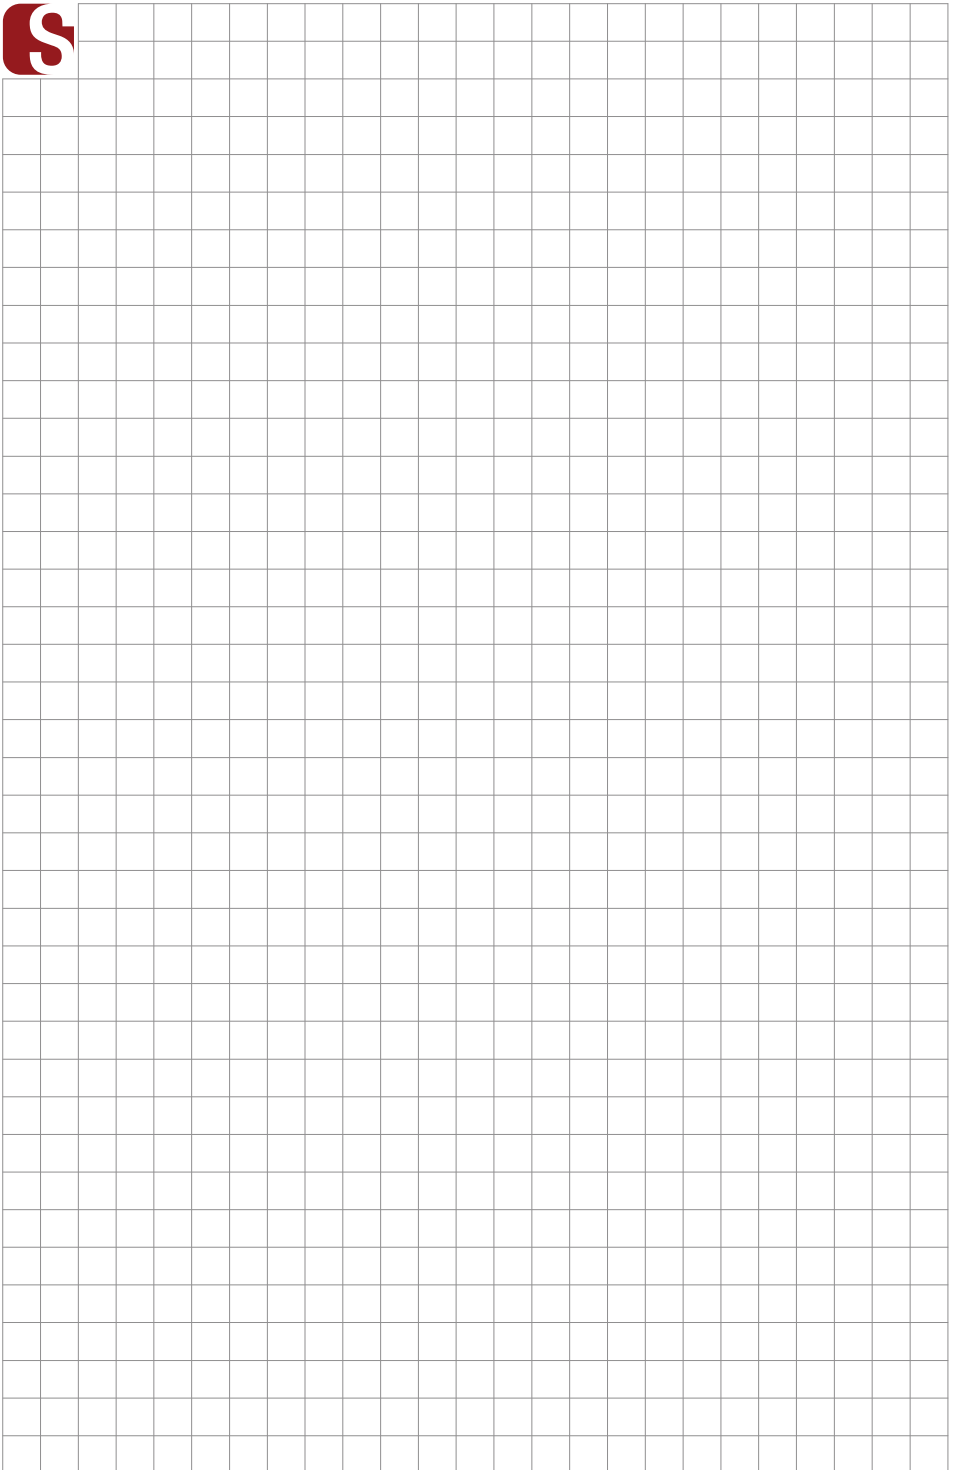

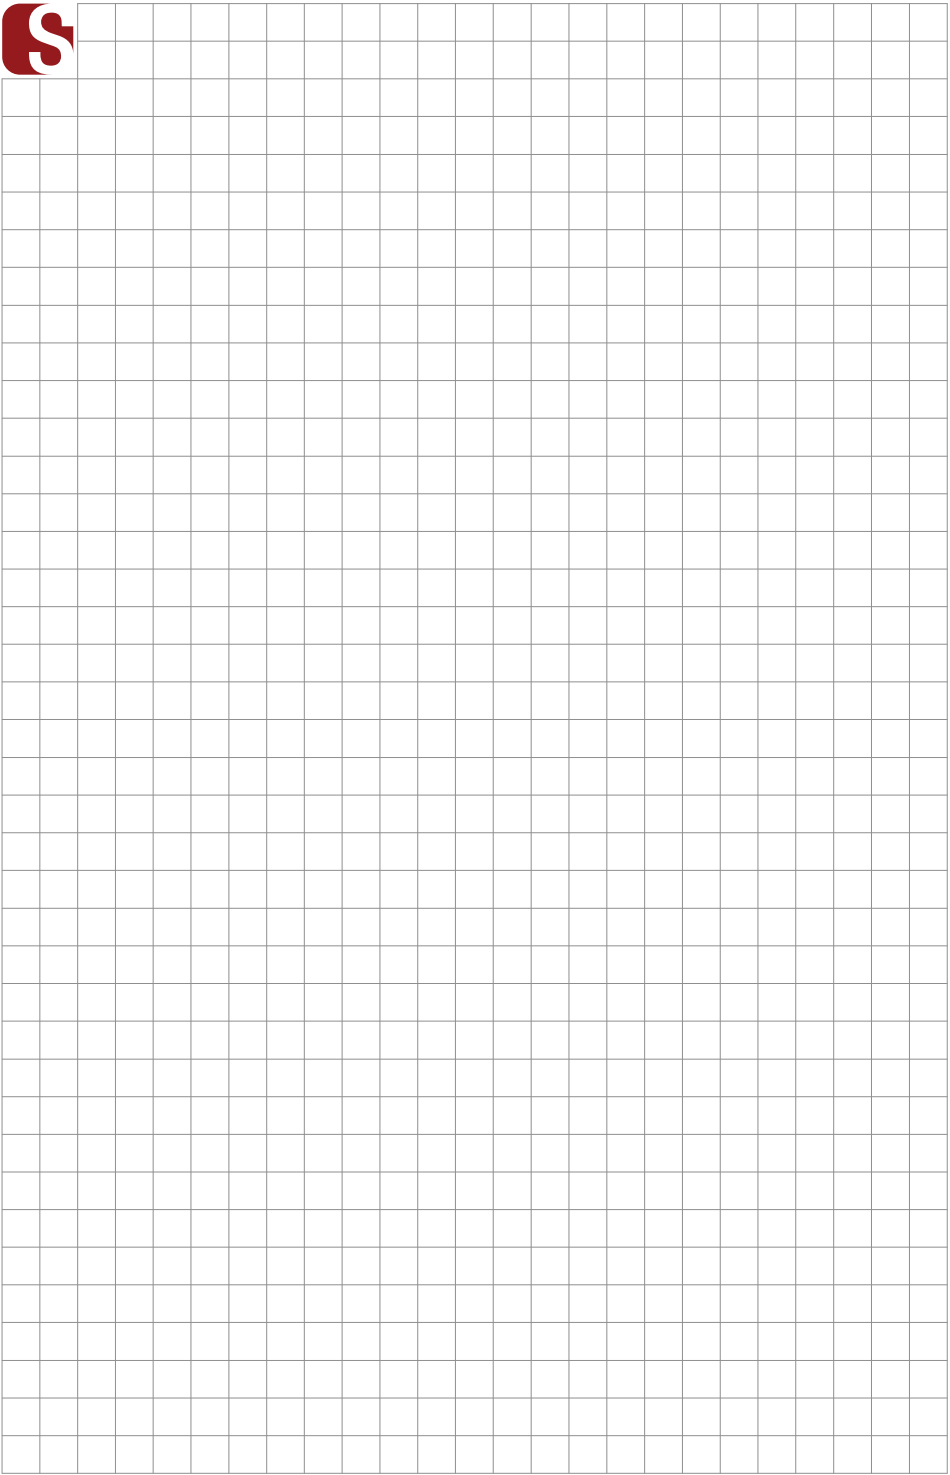

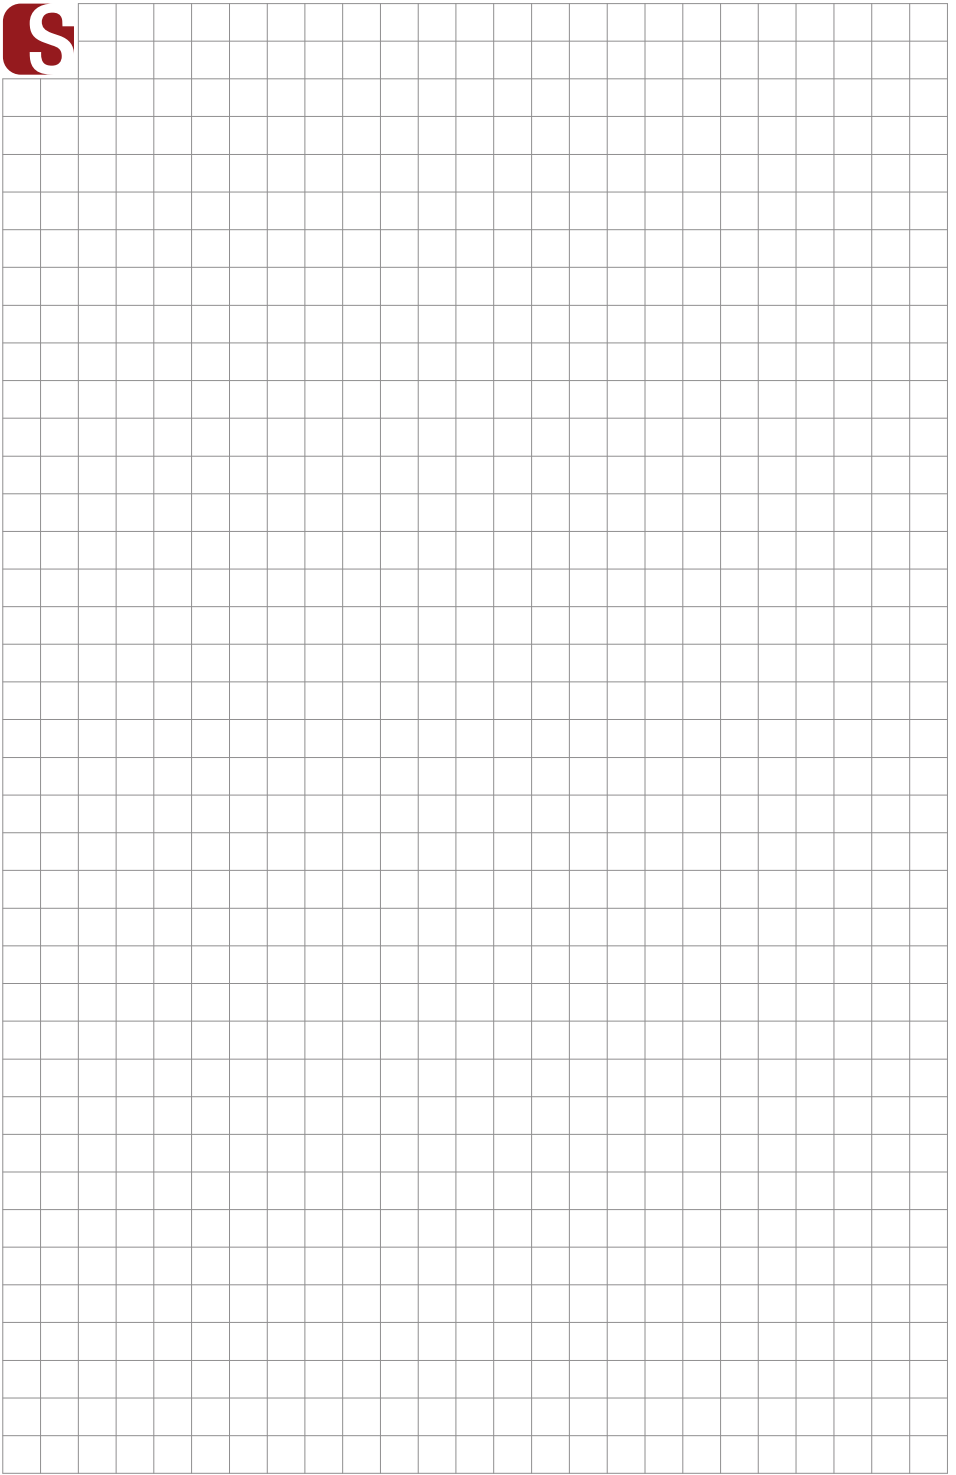

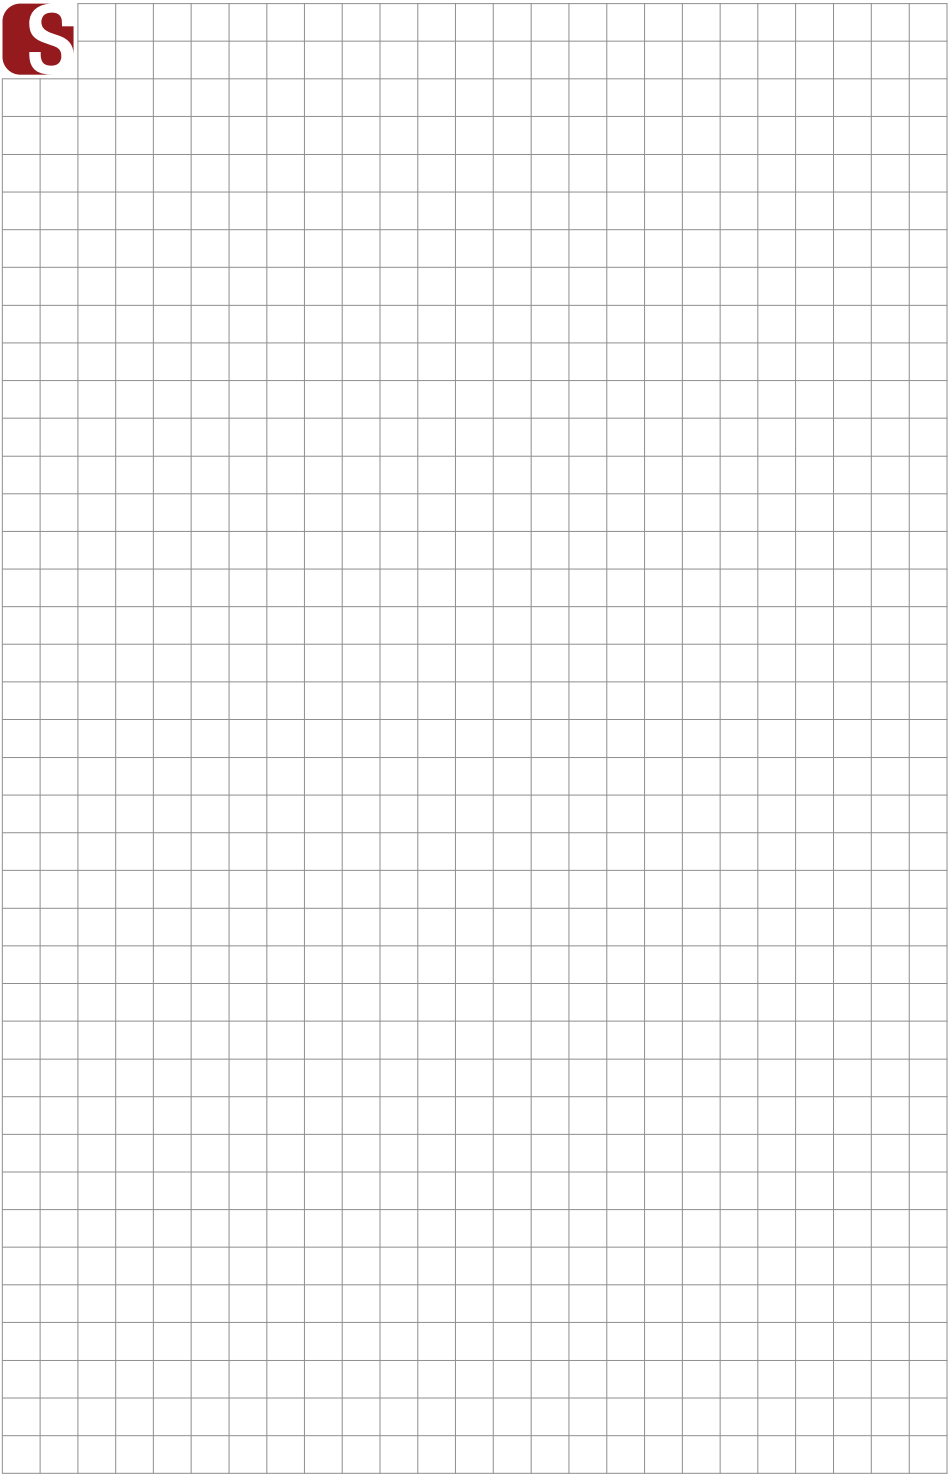



SLIGHT®

Chemin de la Veyre d'en haut D2

1806 St-Légier — Switzerland

+41 21 925 38 88

www.slight.ch

info@slight.ch