

# SLIGHT

## ILLUXTRON CATALOGUE

2025

slightly different



**S**light®  
slightly different





# Our product families



## Pointer family page 48



Pointer 40  
56



Pointer 68  
58



Pointer Spot 68 adj  
60



Pointer Spot  
Pendant SM  
64



Pointer Spot  
Pendant 3F  
64



Pointer Spot  
Pendant 48V  
64



Pointer  
Spot 75  
62



Pointer  
Spot SM 1L  
62



Pointer  
Spot SM 2L  
62



Pointer  
Spot  
Track WL  
62



Pointer Spot  
Track 3F  
64



Pointer Spot  
Track 48V  
64



Track  
system 48V  
68

## Fido family page 70



Fido 98  
74



SensorFido 98  
76



Fido 108  
78



Fido CL 105  
80



SensorFido CL 105  
82



Fido WL 105  
84



## Architectural family – Strada / Vector

page  
86



Strada 35  
92



Strada 50  
94



Strada 68  
96



Strada 75  
98



SensorStrada 75  
100



Strada 90  
102



Strada 100  
104



Strada 150  
106



Vector CL 100  
108



SensorVector 100  
110



Vector CL 145  
112



Strada 185  
114



Vector CL 235  
116



## Pure family - Fluxe / Cylinder

page  
118



Fluxe 35  
120



Fluxe 50  
122



Fluxe 75  
124



Fluxe 90  
126



Cylinder CL 100  
128



Fluxe 185  
130



Cylinder CL 235  
132



## Design family – Linea

page  
134



Linea 75  
136



SensorLinea 75  
138



Linea 120  
140



Linea 185  
142



Linea DS-FS 120  
144



Linea DS-F 150  
146



Linea DS-FX 185  
148



Linea DS-A 195  
150



## Trackspots

page  
152



Linea AS-XS  
154



Odion XS  
156



Track system 230V  
158



## Recessed for modular ceilings

page  
160



Linea  
164



Cortina  
166



Linea Air  
168



## Accessories

page  
170



Emergency  
pack  
170



Correction  
rings  
172



Central PSU for Mini  
Downlights (mA)  
174



Plug & play  
cables  
175

# Downlights (mini)



Strada 35  
92



Strada 50  
94



Fluxe 35  
120



Fluxe 50  
122



Pointer 40  
56



Pointer 68  
58



Pointer Spot 68 adj  
60



# Bartenbach 'Dark Light' technology

## TECHNICAL PARTNERSHIP BETWEEN BARTENBACH AND ILLUXTRON INTERNATIONAL

Illuxtron International and Austrian company Bartenbach started a technical partnership in the field of reflector technology in 2015. Prior to developing the new products, our R&D team set out some quality requirements that the products had to meet in terms of lighting technology. Both R&D teams worked on developing "Dark Light" reflectors for our mini downlights, Linessa and the Aviora Panel.

## REFLECTOR

The reflectors developed in collaboration with Bartenbach feature high-reflection facets that allow us to guarantee high light output. In addition, the reflector's usual facets have extra microfacets that direct the maximum amount of light in the right direction. This enables us to project as much light as possible onto the work surface. All reflectors are fitted with a protective glass that prevents loss of light output due to deposits on the mirror surface.

## Features of Bartenbach's Dark Light Technology

- Low UGR levels combined with high light output
- Excellent homogeneity of the light beam, even in combination with various LED colours
- Protection glass to prevent tarnish on the on front glass

## LOW UGR (UNIFIED GLARE RATING)

Beam width is usually determined at 50% of the highest lux value in the beam (full width half maximum). However, there is often still a lot of scattered light outside of this beam width that causes annoying glare. For this reason Bartenbach also uses beam angles at 10% value (full width tenth maximum). The Fabio 35 reflector, for example, is  $2 \times 18.9^\circ$  at 50% value (FWHM) and only  $2 \times 32.7^\circ$  at 10% value (FWTM). When we compare this with a standard GU10 halogen bulb of  $2 \times 12^\circ$ , the beam angle at 10% is actually wider than the  $2 \times 32.7^\circ$ . This means that in practice a standard GU10 bulb will cause a lot more glare than the Fabio 35 reflector.



## PERFECT LIGHT COLOUR

In addition to the above, the light of all four LEDs contained in the reflector cup is mixed to the limit, creating a light beam without any yellow spots. This is particularly important for versions that use two warm-white and two neutral-white LEDs.

## 4W LED ENGINE EQUIVALENT OF 50W GU10


By using 4 high power LEDs of the newest generation these tiny downlights emit more light than a traditional 50W GU10 halogen lamp.



## BEAM 24°



## BEAM 40°

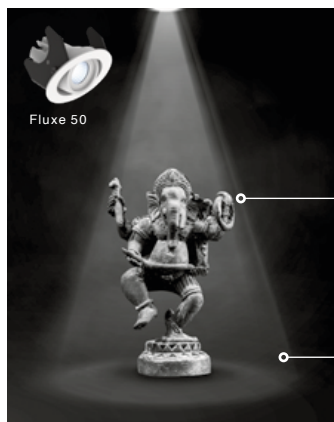

**FWHM**  
(Fullwidth half maximum)  
Beam width at 50% of the highest light level is  $45^\circ$ .

**FWTM**  
(Fullwidth tenth maximum)  
Beam width at 10% of the highest light level is  $65^\circ$ .

The beam is initially narrow, but there is a lot of scattered light at the bottom, causing annoying glare.

The beam is a bit wider, but there is virtually no scattered light at the bottom.



#### POINTER SPOT TRACK 48V

To reduce glare, the Pointer Spot's small light hole is recessed as far into the long tube as possible. Ideal for situations when multiple rail spots are used to illuminate the entire room.

# Pointer series



#### THE NEW SIGNATURE IN ARCHITECTURAL LIGHTING


Let's say you walk into a room that is perfectly lit, but you don't see any light points. That is the new signature in architectural lighting, and it starts with the Illuxtron Pointer Series. 3 new downlights that have unique lenses with zero glare. The light emitting surface is only 8mm in diameter, but still produces between 350 and 650 lumens. This allows for a nearly invisible light experience that gives architects and lighting designers a possibility to present a room like they have never been able before. All the attention goes to the room, not to the glare.

#### ZERO GLARE LENS


The Pointer series is all about a revolutionary new lens that collimates the beam angle. This means that the beam will be reflected into an hourglass shape. The neck of the hourglass beam angle falls precisely through the opening of the downlight. The beam angle is here at its narrowest and therefore the light emitting surface of the Pointer downlights are only 8mm in diameter.

The lens also gives the possibility for an internal anti-glare ring. This makes for a cleaner design and ultra low UGR values. There is virtually no glare from Pointer downlights, and this gives an almost invisible light experience. The room is perfectly illuminated, but you can't see the light points. This gives a clean and relaxed effect in rooms that are equipped with Pointer downlights.

# Pointer Spot

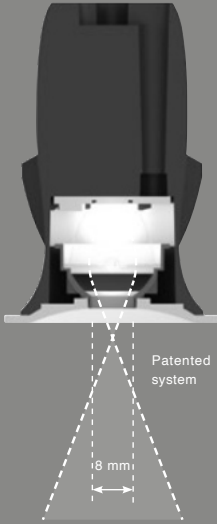

1. High end aluminum heatsink with a unique elegant design
2. New spring for concrete ceilings
3. PCB with a high power Lumileds Powerleds in 2700, 3000K and 4000K
4. Illuxtron patented optical lens system that makes pin-hole light possible
5. Anti glare cap that ensures no stray light. The total light opening is only 8mm!
6. Sleekfront ring in various colours

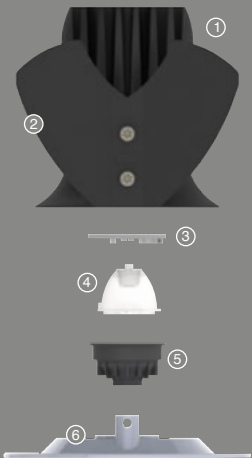


Adjustment option Pointer Spot 68 adj



Plug and play system for 500 and 700 mA drivers. The Pointer series is dimmable.

Adjustment option Pointer Spot 68 adj





**S**light<sup>®</sup>  
slightly different



Pointer 40, 375 Lm, 35°  
Sharp beam angle developed by  
Bartenbach where practically all of  
the light is within the beam.



Fluxe75 800Lm 80°  
Standard downlight where  
a lot of the light spread all  
over the room.

# Downlights (small)



Strada 75  
98



Strada 90  
102



Fluxe 75  
124



Fluxe 90  
126



Fido CL 105  
80



Vector CL 100  
108



Cylinder CL 100  
128



Fido 98  
74



Fido 108  
78



Linea 75  
136



Fido WL 105  
84



# High Voltage Flickerfree Dimming technology (HV-FD)

## FLICKER-FREE; NO STROBOSCOPIC (FLICKER) EFFECTS

Surveys have linked light flicker to health problems. Even though flicker at these frequencies may not be visible to the naked eye, there is evidence to suggest that the human brain can detect light flicker at frequencies of up to 200Hz. Potential problems can include headaches, eye strain, impaired visual performance, or in extreme cases, epileptic seizures. While the best quality power supplies for low voltage luminaires have a flicker percentage of 1-3%, our High Voltage technology has a flicker percentage of only 0.4%.

## FLICKERFREE PATENTED DIMMING TO 0.1%

The minimum and maximum dimming levels are dependent on the quality of the dimmer. With a good quality dimmer, it is possible to achieve/attain a dimming range of 0.1–100% (see our dimmer list on pages 188-189). Even at the lowest levels of dimming, our technology is still lower than 2.4% flicker with a negligible flicker index.



The HV-FD technology is perfectly suited to replace Dali cabling with wireless controls, as well as being coupled to a building management system.

Dimming power	100%	75%	50%	25%	10%
Flicker percent	0.4%	2.4%	1.2%	1.4%	1.4%
Flicker index	<0.01	<0.01	<0.01	<0.01	<0.01

## LOW INRUSH CURRENTS

While most power supplies have a high inrush current (e.g. >5 Amps), our high voltage solution has a maximum of 100 mA (incl. soft-start). With this low (almost negligible) inrush current, the number of luminaires per group, or per dimmer, is no longer determined by the inrush current but rather by the VA rating of that group or dimmer. E.g. a group protected by a B16 circuit breaker has an acceptable VA value of 3600VA. So this group can handle  $3600 / 10 = 360$  luminaires.

## 4KV SURGE PROTECTION

It is often necessary to protect the electronic components against high voltage spikes (surges) from the mains. These can be caused by switching inductive loads near the luminaire or by atmospheric discharges such as lightning strikes.

## EASY INSTALLATION


Each downlight is supplied with a 3-Pole connection box for screw-less looping of H03 or H05 cabling.



Example: looping of "low smoke" cable for public buildings

220-240V

**LOOPING**

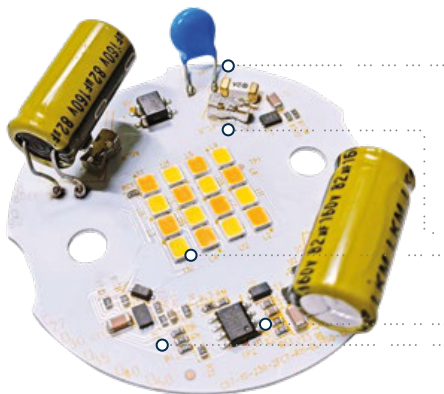

### HV-FD 800 LM (2200-3000K)

- Protection circuit against voltage peaks (4000V)
- 220-240V input
- Multi junction LEDs
- Highly reliable because there are mainly active electronic parts in the circuit
- Flicker control circuit
- IC to reduce flicker

## FLICKERFREE PERFECT FOR VIDEO SHOTS

It's important to have little to no flicker effects when recording video, where the images are cut with several black lines and it is not possible to shoot the video properly.



## FLICKERFREE RCS PROOF

Our past experience has shown us that ripple control signals (RCS) sent over the electricity grid (e.g. for load switching or tariff switching), can cause an annoying flickering of the HV downlights. Our new patented Flicker-free dimmable (FD) technology is not affected by this kind of signal.

## WARM DIM VERSION AVAILABLE


- 100% brightness 3000K
- 50% brightness 2900K
- 25% brightness 2700K
- 10% brightness 2200K



When dimming the light down, the light becomes warmer just like an incandescent lamp.




# Low Voltage technology (LV)

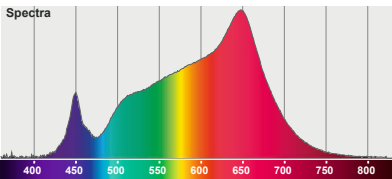

## HIGH EFFICIENT CRI 97\*

The new CRI standard is comparable to Sunlikeand Xicato but with greater efficiency. The colourpoints of the LEDs stay on the black body line and are optimized according to the new TM30 standard where saturation, red value (R9) and skin tone colours are taken into account.

CRI: 97.0 (R1-R8)

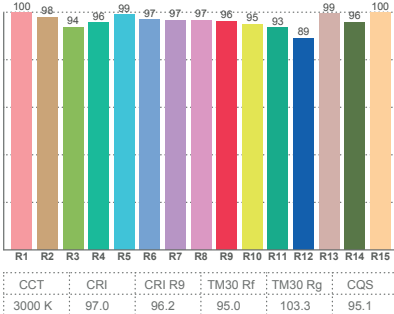

\*Also available in CRI82for highLM/W applications



LV 1250 LM

○ ... COB module

Wide variety of LEDs available, see page 32.


### DIM TO WARM 1800-3000K

Create the ideal ambiance for restaurants and other hospitality venues by dimming the LEDs with any kind of control.

100%	brightness	3000K	
50%	brightness	2650K	
25%	brightness	2200K	
10%	brightness	1800K	




### CRI VERSUS CURRENT

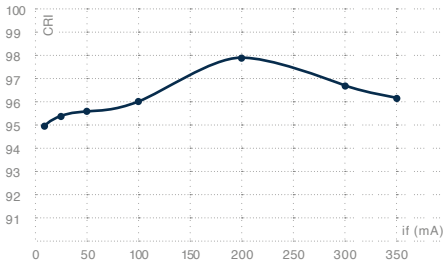

Over the entire dimming curve, the CRI stays very high.

### WIRELESS MESH NETWORK

As well as Bluetooth Low Energy, the Casambi technology provides a mesh network where the intelligence of the system is replicated in every node. This creates a system with no single point of failure. Such self-organizing, wireless mesh networks can control a large number of fixtures from any point. This also allows for firmware updates over a network, allowing any kind of changes to be made over-the-air. In this kind of fully distributed and symmetric architecture, any unit can go offline and catch up from the others when they return back online. The Casambi devices are smart on their own and only connect when needed. An Internet connection is not necessary for normal operation; it is only needed for user interface configurations to be sent or recalled from the cloud.



CASAMBI



matter


Coming soon!



HIGH QUALITY  
STRADA  
CRI97

58 M 2,  
98137

**S**light®  
slightly different




HIGH EFFICACY  
STRADA  
CRI82

LIKILIOA



# Daylight inside and outside

## Basic HCL 2700-6500K 2 channel



### HUMAN CENTRIC LIGHTING HIGH-END LIGHTING DESIGN SOLUTION

Natural light changes colour throughout the day – from a morning sunrise glow, to a bright midday sun, then to a rich warm sunset. We have the technology to change the colour of the artificial light in our homes.

The human biological clock is closely tied to the day/night cycle of the Earth – circadian rhythm, and is pivotal for our body's release of various hormones including melatonin that regulates sleep, and cortisol for healing. We know that light has a significant influence on the human biological clock and our health.

As much as technology can benefit us, it can also disrupt our natural biological clock. We have too little of the right type of light during the day, and too much of the wrong type of light at night. Exposure to televisions, LED lights, computer screens, and mobile devices that emit blue (cool) light at night can disrupt our biological clock, delaying the natural sleep pattern.


Control protocol: DALI-8

# Advanced HCL

- Best melanopic effectiveness with highest light quality (CRI, MacAdam1)
- From candlelight (1.800K) to sky blue (16.000K) & RGB
- Worldwide patented
- Different models on request



Ask MIYO about the possibilities of applying HCL with our products.

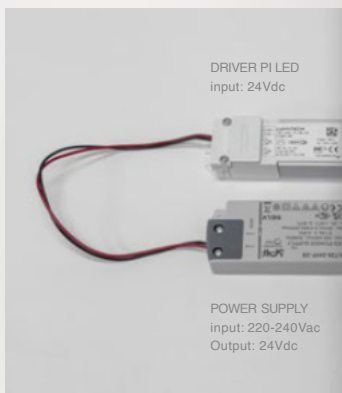

## RGB COLOURS

For mood-light or in combination with a glass-facade, generating Corporate Identity. The Blue-channel can be controlled separately to avoid unwanted activation during the night (night light).

## COLOUR CONSISTANCY

Highest accuracy of colour thanks to 100% calibration and temperature compensation. There will be no visible deviation from one luminaire to the other (MacAdam Step 1)

## BETTER SLEEP BASED ON RESEARCH

The body is activated at the right time but especially in the evening with the result of a better sleep behaviour. An average person in Europe spends 1-1,5hr in daylight and therefore it is most suitable for: Schools, offices, smart homes, retirement and nursing homes as well as hospitals. This lighting solution focuses on the relationship between light and people and in the meantime it lights up your interior in the best possible way

## EASY CONTROL & FLICKER-FREE

The system can be controlled by Dali DT8 or Zigbee. Even in a dimmed situation it is completely flicker-free. And all of this fully automatically with the possibility of individual control!

**Bartenbach**<sup>®</sup>  
lighting optics

slightly different



# High CRI LEDs for quality light

## LED TYPES

LEDs can be supplied with different phosphor layers. The CRI82 LEDs are the most efficient types and are most commonly used, but for clothing stores or high-quality interiors we recommend the CRI97 LED types. Because the CRI97 uses multiple layers of phosphor, the

color rendering is almost perfect, although this is at the expense of efficiency. CRI90 is a nice mix of efficiency with acceptable color rendering. In the table below you will find a comparison of the different types



## High CRI LED options

	CCT	CRI	R9	Rf	Rg	Downlights small			Downlights large		Downlights large		Brand	Item code
						mA	Lm	Lm/W	mA	Lm	mA	Lm		
CRI82	2700K	82	5	83	94	350	1650	128	700	3400	1200	5300	Bridgelux ksf	51-4087-27
CRI82	3000K	82	7	86	95	350	1725	134	700	3575	1200	5550	Bridgelux ksf	51-4087-30
CRI82	4000K	82	18	84	96	350	1750	136	700	3650	1200	5800	Bridgelux ksf	51-4087-40
CRI90	2700K	92	67	88	104	350	1550	118	700	3150	1200	4700	Bridgelux ksf	51-4088-27
CRI90	3000K	92	67	92	99	350	1600	122	700	3250	1200	4850	Bridgelux ksf	51-4088-30
CRI90	4000K	92	78	92	100	350	1625	124	700	3300	1200	4925	Bridgelux ksf	51-4088-40
CRI97	2700K	97	93	96	103	350	1150	83	800	2300	1400	3425	Lumileds	50-3031-27
CRI97	3000K	97	96	95	103	350	1250	91	800	2500	1400	3750	Lumileds	50-3031-30
CRI97	4000K	97	96	95	103	350	1350	98	800	2700	1400	4050	Lumileds	50-3031-40

Downlights (small) - Max. driver setting 350 mA



Max. driver setting 500 mA




Max. driver setting 650 mA



Downlights (large) - Max. driver setting 1400 mA



Max. driver setting 500 mA



Trackspots - Max. driver setting . 800 mA



Max. driver setting . 1400 mA



**PATENTED PHOSPHOR TECHNOLOGY**

By using new patented phosphor types (KSFtechnology), enormous efficiency has been achieved, especially in the high CRI types. Illuxtron applies this new technology for all products in the product overview that you will find on this page, both for the standard CRI82 and for the CRI90 types which are available on request.


NEW PATENTED  
KSF PHOSPHOR  
TECHNOLOGY



**S**light®  
slightly different

WHERE QUALITY  
AND EFFICIENCY  
MEET EACH OTHER



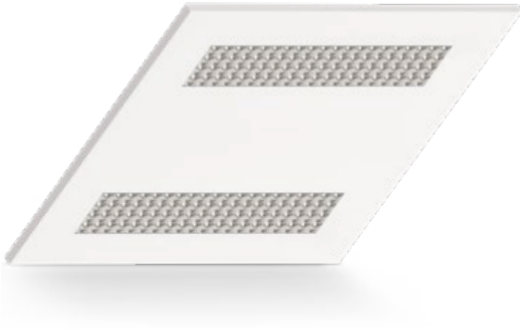

## ILLUXTRON'S 2-CHANNEL LED PANELS ARE PERFECT FOR HCL

Nowadays it is very easy to create a Human Centric Lighting system without the need of complicated Dali equipment. The LED panels and downlights made by Illuxtron

can be equipped with a 2 channel Eldoled / Casambi driver of 2x25W. An essential part of the HCL principle is to double or triple the normal light output between 9 and 10 o'clock and our panels with a lumen output of about 7000Lm are perfectly suited for this.

# HCL LED panels

## Features and benefits

- The LEDs are optimally placed in the luminaire, which guarantees a longer lifespan
- The diffusers have been designed to ensure UGR values of less than 19 (max. 3950 Lm)
- Guaranteed colour consistency due to 3-Step MacAdam
- Excellent dimming performance to 10%
- IP44 rating
- LED panel 1195x295 available on request

The proven advantages of HCL are:

- Being able to sleep better at night (fewer diseases and reduces depression)
  - Better memory and concentration, fewer errors
  - Being more creative
  - Special HCL cycle for working during the night
  - Reduces ADHD
  - Better sports achievements
- Just download the free Casambi app and you are ready to go.

## OPTICAL SYSTEM

In order to meet the anti-glare standards, a combination of lens and diffuser technology has been developed by the Illuxtron team. In addition to the standard wide beam, narrower beams are also available on request and even an asymmetric version.

## SUSTAINABILITY

At the end of its life, the LED technology can be easily renewed so that a warranty can be issued again. This only works for larger quantities and in consultation with our sales department.


## HIGH QUALITY FIXTURE

The metal fixture construction is manufactured in Europe in fully automated production lines. This results in extremely low material tolerances and prevents defects. Our fixtures are sprayed with a Dupont epoxy powder coating which ensures that even after prolonged use there is no visible discolouring.

## HEAT DISSIPATION

You would want the panel to still produce sufficient light after years of use. Due to their positioning in the back of the housing, the LEDs are optimally cooled and even after 70,000 operating hours you will notice no difference in light output. So if you want an installation that is problem free for many years, a "back lighting" solution is your choice.



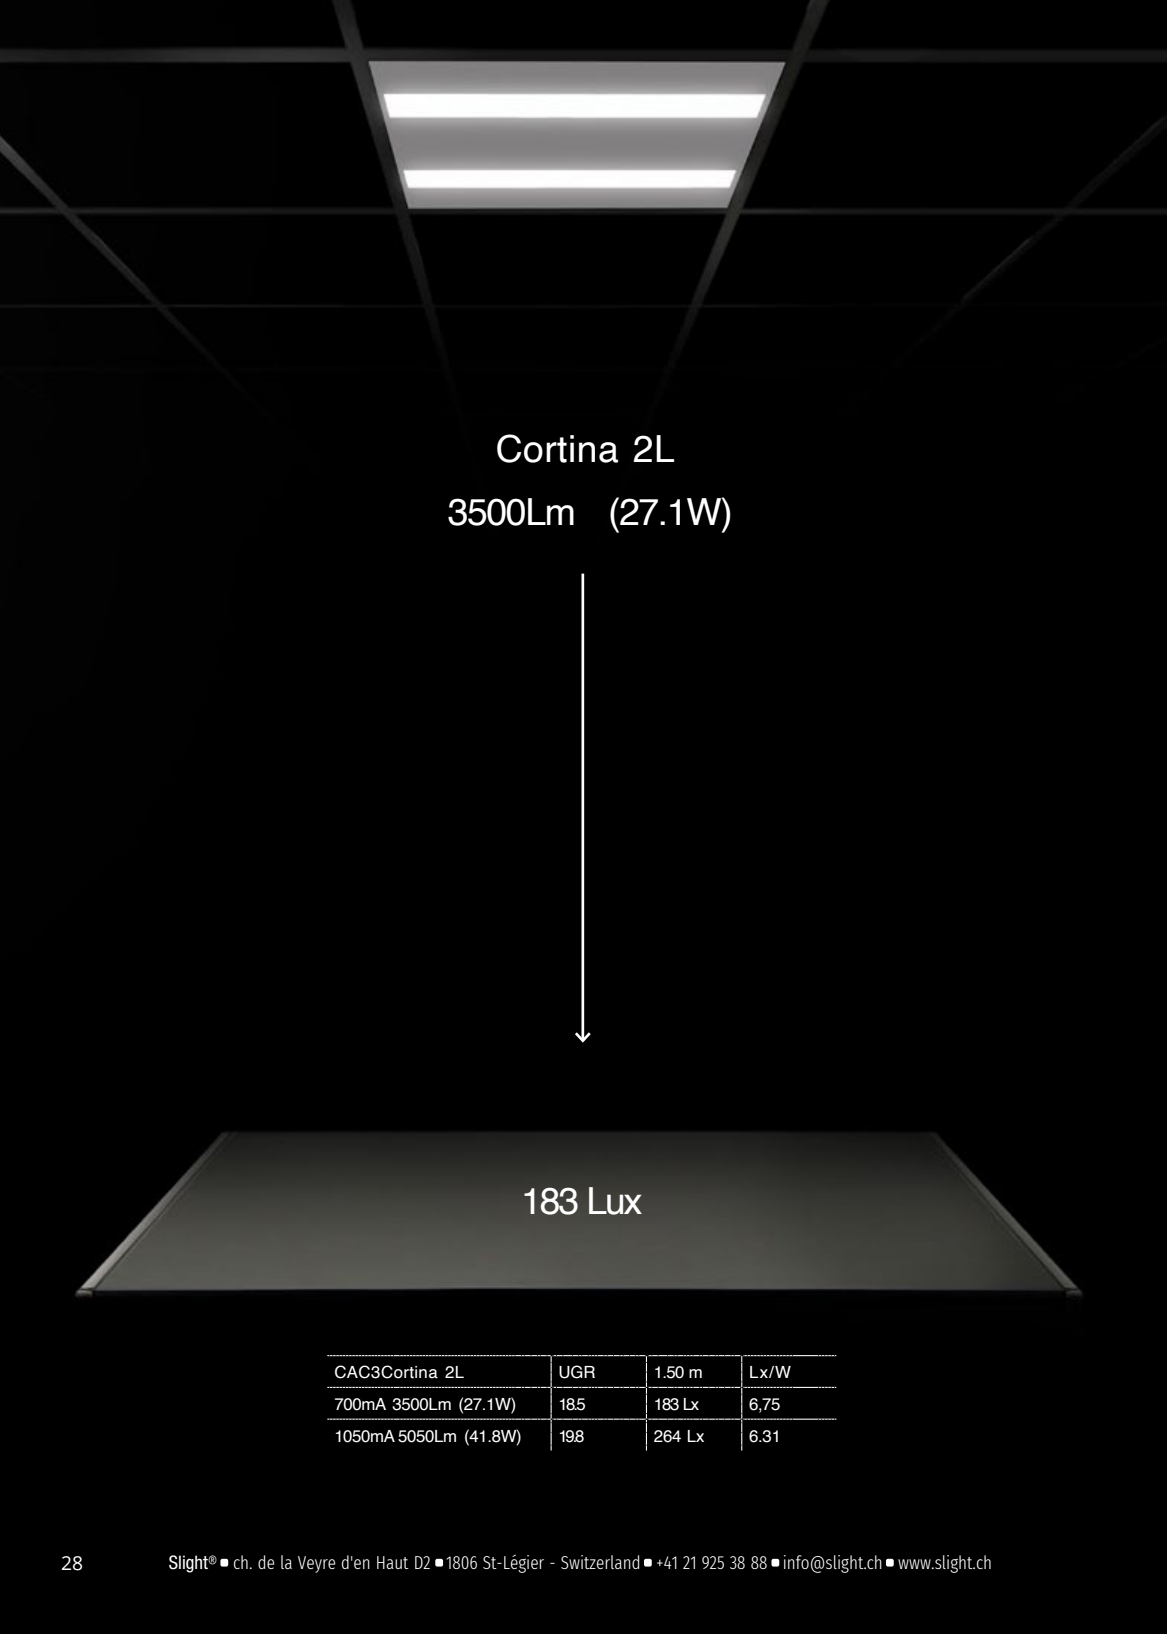


Cortina 2L  
3500Lm (27.1W)

183 Lux

CAC3Cortina 2L	UGR	1.50 m	Lx/W
700mA 3500Lm (27.1W)	185	183 Lx	6,75
1050mA 5050Lm (41.8W)	198	264 Lx	6.31



Linessa 2L  
3300Lm (23.8W)

Bartenbach 'Dark Light' Technology

No glare

39% more efficient vs LEDpanel

78% more efficient vs 4x18WTL



256 Lux

3DC3 Linessa 2L	UGR	1.50 m	Lx/W
500mA 3300Lm (23.8W)	138	256 Lx	10,75
700mA 4550Lm (33.6W)	149	352 Lx	10,47

# Linessa

## Excellent office lighting

### SUSTAINABILITY

Less is more. Or in the case of Linessa: Making technical innovation affordable by clever product design. The end result is a lighting panel that only has 7 parts and no glue, screws or tape. Linessa has a very minimalist design. At the end of life it is very easy to take the product apart or implement a new LED module. In this scenario we minimize the waste of materials, keeping it as low as possible. Compare this to hazardous fluorescent lamps that need to be replaced frequently.




## BARTENBACH DARKLIGHT TECHNOLOGY - UGR11

Normal diffuser panels distribute light in all directions and create a lot of glare. The Bartenbach Institute helped us to develop special reflector cups that ensure all of the light is reflected in ways that you need. Less glare in an office means less mistakes, less headaches and greater wellbeing for your employees.



Each Aviora Reflector has 920 different facets for optimum beam control.



### BEST IN CLASS LUX/WATT

The normal amount of lux for an office desk is around 500Lux. With the Linessa series this can be achieved with less energy. Compared to a normal diffuser LED panel of 25-40W it saves 25-40%.  
\* If compared to a 4x18W fluorescent luminaire with 84W, it saves an incredible 78%.

### NO MULTI SHADOWS

As soon as you try to focus light onto an object with multiple reflectors there will be an annoying multi shadow effect. By using 10 times more reflector cups than normal this effect will disappear.

### BESPOKE VERSIONS

The metal plate can be easily changed to different dimensions. It is even possible to integrate a sensor into the plate or air sleeves for ventilation.


### LESS LIGHT PRESSURE

Existing LED reflector technology panels have low glare, but were uncomfortable to work under. By adding more reflector cups we managed to achieve the best comfort available in any LED panel on the market. The pressure from the LEDs is divided by an enormous amount of LEDs.



Linessa2L 595x595 with integrated Helvar ActiveAhead sensor available through MIYO.

**Helvar**

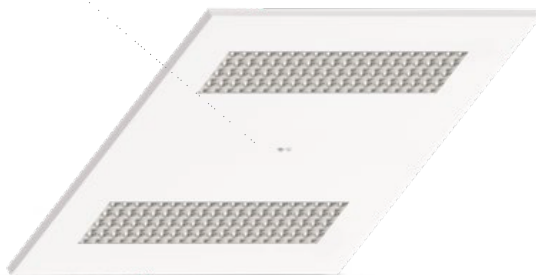

## Features and benefits


- Application of Bartenbach's special Dark Light Technology with ultra-low UGR rating.
- Ideal for office applications
- Extremely low wattage for necessary lux level



# Linessa Air

## Lighting with integrated ventilation

A unique combination of both lighting product and a ventilation system, which results in a clean ceiling design. OrangeClimate and Illuxtron International collaborated in such a way that both their best products fit seamlessly together.

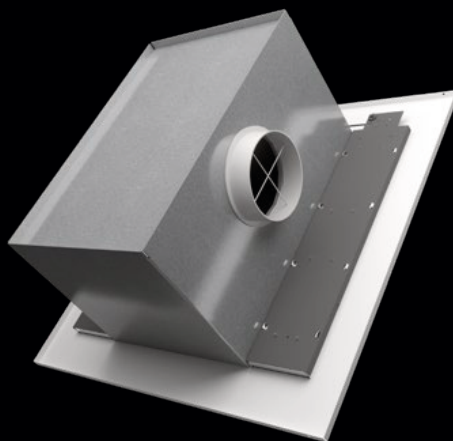

### Features and benefits

- Comfortable Airflow
- Suitable for every system
- No irritating glare
- Highest Lumen / Watt
- Homogeneous light pattern
- Designed and produced in the Netherlands
- Patented design
- 7 years warranty



Before, with separate air ventilation and lighting



After, with LinessaAir and integrated ventilation.

### APPLICATION EXAMPLE

The ventilation can be spread over additional units to avoid an unwanted airflow. Each luminaire can either be used for blowing air in the room or to let the air escape from the room.



# TCI

## Reliable compact driver range

### MULTI CURRENT OPTION

By manually changing the dipswitch settings on the driver it is possible to lower current to the LEDs. This can be used if you want to extend the lifetime of the system or in case the light is too bright.

### VIDEO/PHOTO PROOF

Lighting with a low flicker index is essential in areas where photo and film cameras are used. Flickering light has a negative effect on the quality of pictures and film footage.

### POWER-SURGE PROTECTION

Most TCI drivers are protected against power surges of up to 4 kV. This is considerably above the 1kV norm. Many LEDs are protected up to 500 V. The surge protection in TCI drivers results in an extremely low defect percentage of 0.2%.

### SAFETY AND SECURITY

- Protected against power surges in the electricity network
- Protected against extreme heat
- Protected against overload

### RIPPLE FREE

TCI LED drivers are fitted with a multi-stage circuit to provide the LEDs with a perfect current (pure direct current). Low-quality drivers with a high ripple factor can cause health problems including headache, eye strain, impaired vision or, in extreme cases, even epileptic seizure.

# Main power supply units



## Features and benefits

- Surge protection up to 4 kV
- Various dimming options (1-10V & Push, DALI, Triac, Casambi)
- Multiple currents through Dip-Switch settings
- Low operating temperature
- Maximum heat-sink temperature remains below 70°C
- Can be connected to a central battery system 220-240V DC
- Manufactured in Europe
- ENEC/EMC compliant
- Strain relief in accordance with European safety standards
- Active power-factor correction
- Highest-quality (A-brand) electronic components

**CASAMBI**



# eldoLED

Used by high-end lighting designers

## HYBRID DIMMING

eldoLED uses a technology called Hybrid Hydra Drive, an advanced type of hybrid dimming that varies the LED current, duty cycle and frequency on a small current range. This offers the best dimming regulation at deep dimming levels, high frequency operation (mixing frequencies between 1KHz and 20KHz), low noise generation, reduced colour shift during dimming and no flicker.

## LIGHTSHAPE COLOR SCIENCE

eldoLED LightShape technology takes the complexity out of dynamic white lighting and enables the creation of dynamic white lighting with standard controls, standard drivers and standard LED modules. LightShape lets you set up a smart relationship between the control input and LED outputs, enabling lighting applications such as "Dim to Warm" and "Tuneable White" using standard controls.

## WIRELESS TUNABLE WHITE CONTROL

eldoLED offers wireless lighting controls and Bluetooth low energy beaconing from a compact radio. eldoLED's BLE radio's LEDcode2 connection allows for easy, two wire digital integration with most eldoLED drivers. Combined with a digital luminaire system this provides the perfect combination of drive technology and wireless control.

## APPLICATIONS WHERE FLICKER CAN BE AN ISSUE



Offices



Industrial spaces



Hospitals



Classrooms

## EXTREMELY LOW FLICKER

eldoLED believes the IEEE-P1789 standard and the diagram associated with it are great tools to compare drivers with respect to flicker. We suggest the following for the specification of LED drivers, which is considered the recommended practice:



"LED drivers shall conform to IEEE-P1789 standards. Systems that do not meet IEEE P1789 will not be considered."

## SMOOTH DEEP DIMMING


In order to come close to what we as human beings perceive as Natural Dimming, high-quality LED lighting should:

- be able to dim to dark
- have no flicker\* even when increasing or decreasing brightness
- allow smooth changes in brightness
- have adaptable dimming curves
- allow you to set a minimum dimming level
- feature dynamic behaviour

\*eldoLED follows the recommended practice brought forward by the IEEE-1789 to mitigate flicker-induced health risks to viewers.

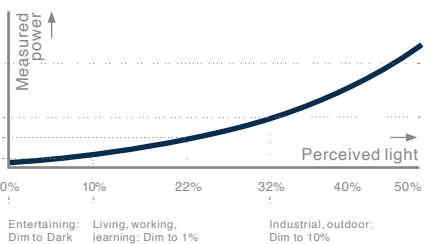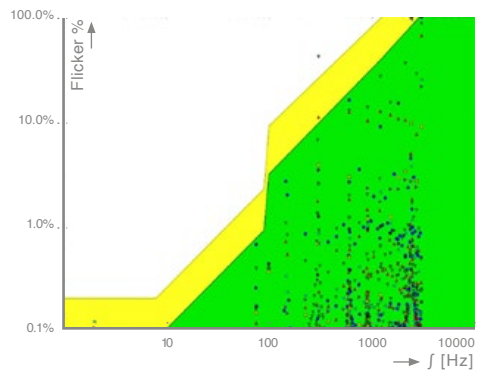

Entertaining: Dim to Dark Living, working, learning: Dim to 1% Industrial, outdoor: Dim to 10%

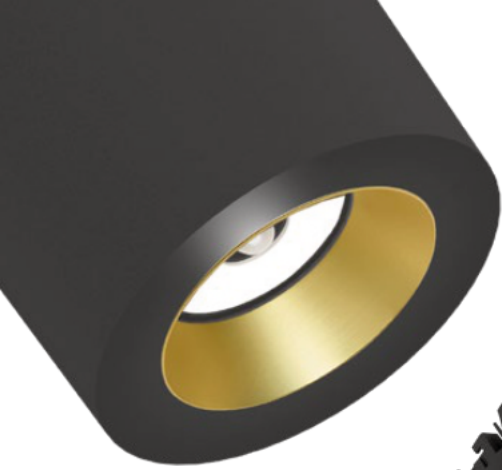

# Sensor technology

## MOTION DETECTOR

Our luminaires with integrated motion detectors are best installed in smaller spaces that require a single light source, such as toilets and corridors. The luminaire is independently controlled and therefore cannot be used in a 'master/slave' combination.

## COMPLEX SOFTWARE

Whether a sensor that is integrated into a luminaire functions well, depends on temperature differences within electronic circuits, harmonic interference, power surges, and inrush current from other devices, to name just a few possibilities. All these factors have been taken into account by the complex software, ensuring that the sensor functions correctly.

## QUAD PIR SENSOR

Both the sensor and lens are manufactured of advanced electronic materials. The sensor is a Quad type, which is used exclusively in spaces where sensitivity and reliability are essential.

## INSTALLATION APPLICATIONS

Sensor-fitted luminaires can be installed in toilets, corridors, storage spaces, garages, barns, and under front- or back-door canopies or glass awnings.

## Features and benefits

- Luminaires with integrated (PIR) motion sensors
- Reliable under all conditions

Illuxtron downlights can be assembled using different kinds of springs. The three different versions are CS, WS and GS. The datasheet will explain which type of ceiling material you can use with each spring.

#### CS SPRINGS (CONCRETE SPRINGS)


CS springs (except Pointer series) can be used in almost any type of ceiling. Support plates should definitely be used when mounting big downlights in soft mineral ceilings. The spring's slightly bent edge prevents the ceiling material from getting damaged. We recommend making the hole in the ceiling material 10mm wider than the specified cutout diameter (assuming this doesn't exceed the maximum diameter).



# Installation: Springs

#### WS SPRINGS (WIRE SPRINGS)

WS springs are traditional springs that are eminently suited for soft ceiling tiles in combination with support plates (that cannot be taken out of the ceiling). WS springs are not suitable for concrete ceilings and soft ceiling tiles without support plates.



#### GS SPRINGS (GYPROC SPRINGS)


GS springs are ideally suited for quick mounting in hard ceiling tiles without support plates. GS springs do normally come with (larger) Linea luminaires only. Turning the luminaire anti-clockwise fixes it extra tightly in the tile.






## THE NEW SIGNATURE IN ARCHITECTURAL LIGHTING

Let's say you walk into a room that is perfectly lit, but you don't see any light points. That is the new signature in architectural lighting, and it starts with the Illuxtron Pointer Series. 3 new downlights that have unique lenses with zero glare. The light emitting surface is only 8mm in diameter, but still produces between 350 and 650 lumens. This allows for a nearly invisible light experience that gives architects and lighting designers a possibility to present a room like they have never been able to before. All the attention goes to the room, not to the glare.

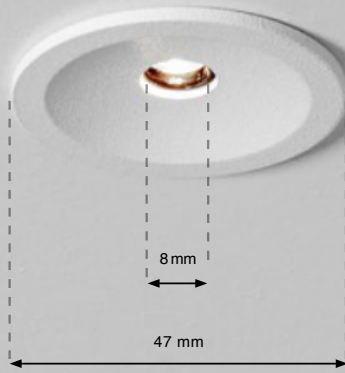

Pointer 68 Fix with correction ring. See page 172 for more information.

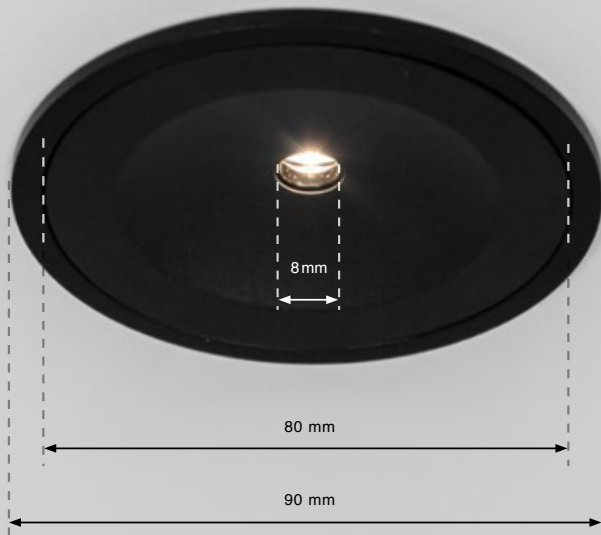


slightly different



Highlighting  
every element of your  
design with  
precision




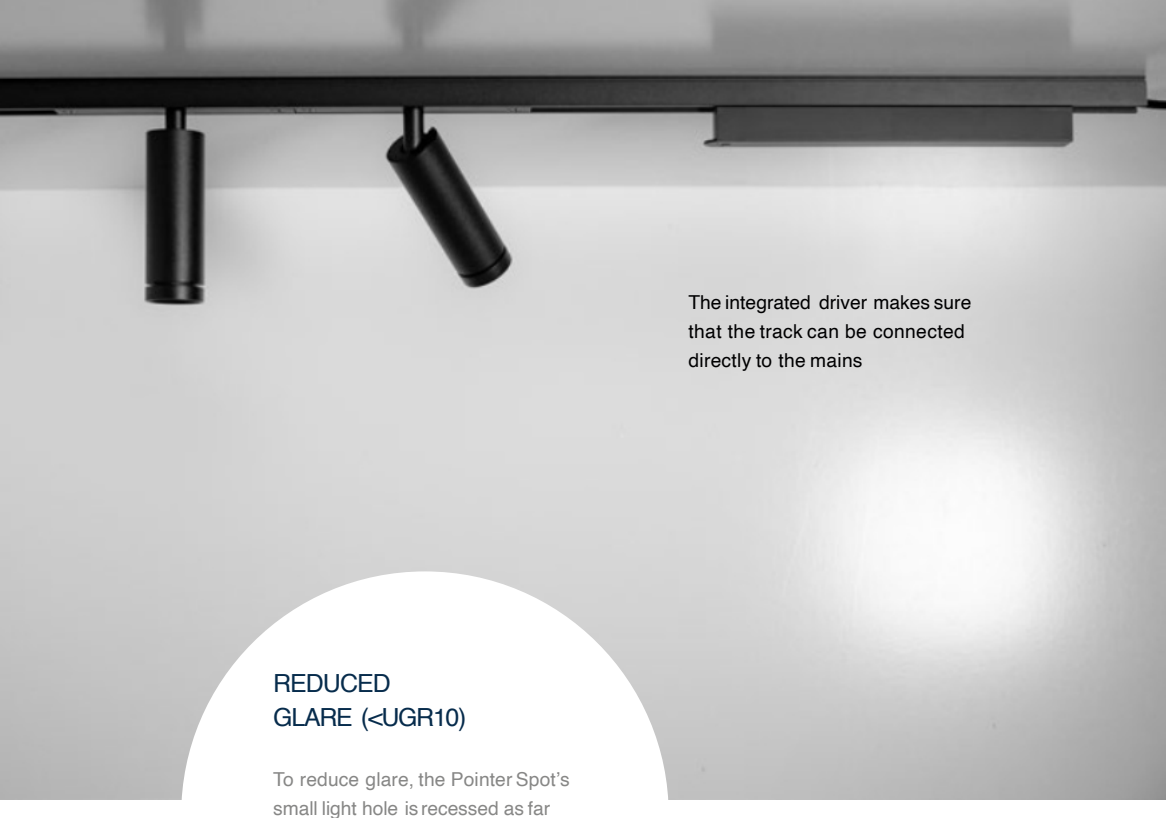

The integrated driver makes sure that the track can be connected directly to the mains

### REDUCED GLARE (<UGR10)

To reduce glare, the Pointer Spot's small light hole is recessed as far into the long tube as possible. Ideal for situations when multiple rail spots are used to illuminate the entire room.

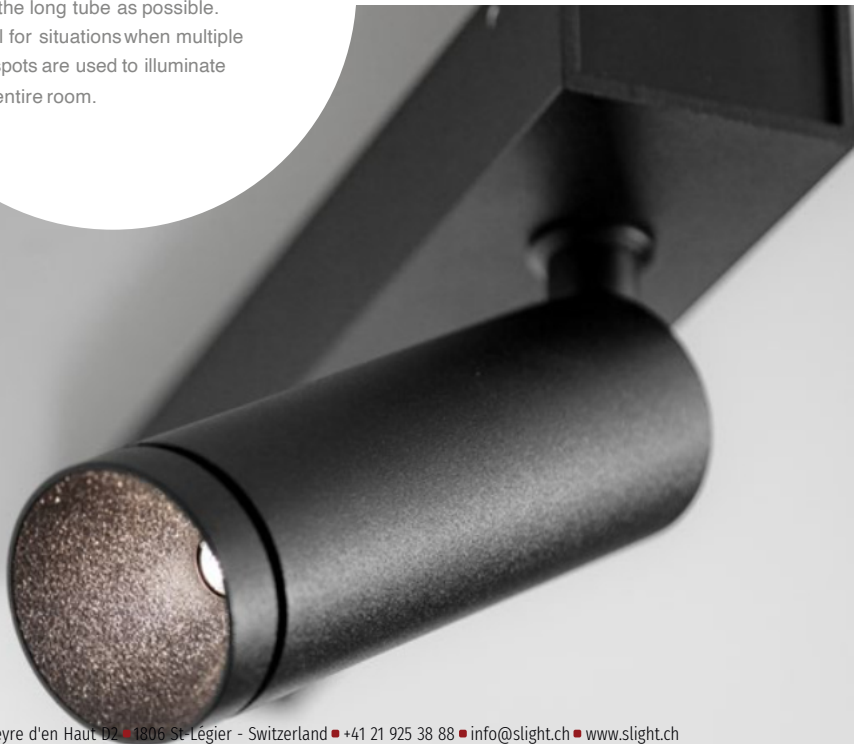




Extreme flat drivers  
are integrated in  
the base of the  
luminaire

**Bartenbach**<sup>®</sup>  
lighting optics

slightly different

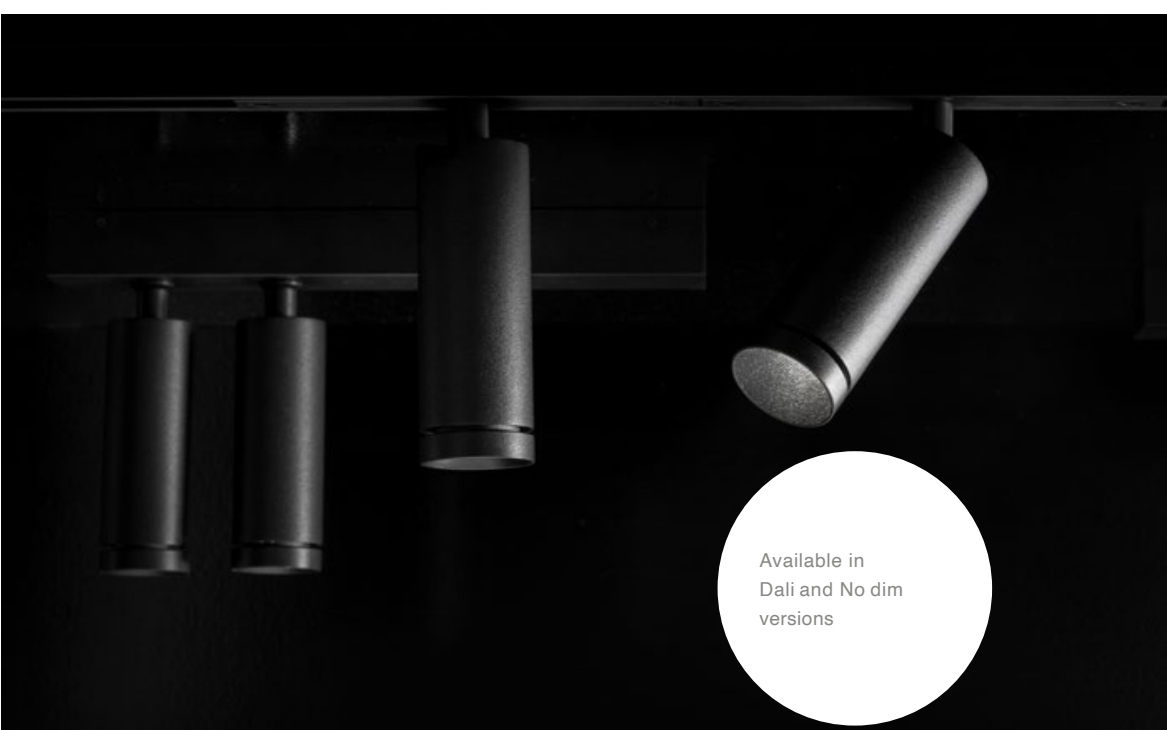


Available in  
Dali and No dim  
versions

No dim, Triac & Dali  
Power Supply



35°/60°  
2700/3000/4000K

slightly different



ø 47 mm

**COLOURS**



Matt white  
RAL 9016 (XX=MW)



Matt black  
RAL 9005 (XX=BL)


**SPRINGS**



Standard with WS springs (gyproc/metal).  
Also available as above with CS springs (concrete)

# Pointer 40 (Gen2)

## DIMENSIONS




### Incl. PSU (100-240V)

PSU KGPCC6W500CGA26 No dim 80x22x21mm  
 PSU TCI 127042 Triac dim 102x38x21mm  
 (Only for wire spring, watch out for small rim)  
 Cable 150 mm



### Incl. conn.box (500mA)\*

For installation to a central power supply.



## SPECIFICATIONS

Beam angle (FWHM)	35° (45° FWTM) / 60° (80° FWTM)
Fixture material	Housing: Die cast aluminium
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK10
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

\*See page 174 for more information about power supplies.



Using WSsprings: Ø 40 mm.  
 Thickness ceiling 1-25 mm  
 & recess depth 73 mm.



Using CSsprings: Ø 40 mm.  
 Thickness ceiling 5-73 mm  
 & recess depth 73 mm.



Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.



## ITEM SPECIFICATIONS

See pricelist 2025 page 8

Description	Item code	Input	Vf	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Pointer 40 LV 35° 350Lm 2700K Triac dim	0N2703XXWN13	100-240V	x	6.6	53	82	7.4	0.96	II
Pointer 40 LV 35° 375Lm 3000K Triac dim	0N2703XXWP13	100-240V	x	6.6	57	82	7.6	0.96	II
Pointer 40 LV 35° 400Lm 4000K Triac dim	0N2703XXWQ13	100-240V	x	6.6	61	82	7.9	0.96	II
Pointer 40 LV 60° 400Lm 2700K Triac dim	0N2703XXWR13	100-240V	x	6.6	61	82	17.8	0.96	II
Pointer 40 LV 60° 425Lm 3000K Triac dim	0N2703XXWS13	100-240V	x	6.6	64	82	18.0	0.96	II
Pointer 40 LV 60° 450Lm 4000K Triac dim	0N2703XXWT13	100-240V	x	6.6	68	82	18.2	0.96	II
Pointer 40 LVC 500mA 35° 350Lm 2700K	0N2703XXWN11	500mA	11.4	5.7	61	82	7.4	x	III
Pointer 40 LVC 500mA 35° 375Lm 3000K	0N2703XXWP11	500mA	11.4	5.7	66	82	7.6	x	III
Pointer 40 LVC 500mA 35° 400Lm 4000K	0N2703XXWQ11	500mA	11.4	5.7	70	82	7.9	x	III
Pointer 40 LVC 500mA 60° 400Lm 2700K	0N2703XXWR11	500mA	11.4	5.7	70	82	17.8	x	III
Pointer 40 LVC 500mA 60° 425Lm 3000K	0N2703XXWS11	500mA	11.4	5.7	75	82	18.0	x	III
Pointer 40 LVC 500mA 60° 450Lm 4000K	0N2703XXWT11	500mA	11.4	5.7	79	82	18.2	x	III

All values are measured at 230V (+/- 7%).



slightly different



#### COLOURS



Matt white  
RAL 9016 (XX=MW)

Matt black  
RAL 9005 (XX=BL)


#### SPRINGS



Standard with WSsprings (gyproc/metal).  
Also available as above with CSsprings (concrete)

# Pointer 68 fix (Gen2)

## DIMENSIONS




### Incl. PSU (220-240V)

PSUTCI 127046 Triac dim	102x38x21mm
PSUTCI 125400 1-10V & Push	102x38x21mm
PSUTCI 127576 Dali	147x44x22 mm



### Incl. conn. box (700mA)\*

For installation to a central power supply.



## SPECIFICATIONS

Beam angle (FWHM)	35° (45° FWTM) / 60° (80° FWTM)
Fixture material	Housing: Die cast aluminium
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK10
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

\*See page 174 for more information about power supplies.



Using WS springs: Ø 68-75 mm.  
Thickness ceiling 1-30 mm  
& recess depth 70 mm.



Using CS springs: Ø 68-75 mm.  
Thickness ceiling 5-70 mm  
& recess depth 70 mm.



Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.



## ITEM SPECIFICATIONS


See pricelist 2025 page 8

Description	Item code	Input	Vf	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Pointer 68 fix LV 35° 500Lm 2700K Triac dim	0P2803XXWU13	220-240V	x	9,2	54	82	7,2	0,96	II
Pointer 68 fix LV 35° 525Lm 3000K Triac dim	0P2803XXWV13	220-240V	x	9,2	57	82	7,3	0,96	II
Pointer 68 fix LV 35° 550Lm 4000K Triac dim	0P2803XXWW13	220-240V	x	9,2	60	82	7,5	0,96	II
Pointer 68 fix LV 60° 550Lm 2700K Triac dim	0P2803XXWX13	220-240V	x	9,2	60	82	17,5	0,96	II
Pointer 68 fix LV 60° 600Lm 3000K Triac dim	0P2803XXWY13	220-240V	x	9,2	65	82	17,8	0,96	II
Pointer 68 fix LV 60° 650Lm 4000K Triac dim	0P2803XXWZ13	220-240V	x	9,2	71	82	18,0	0,96	II
Pointer 68 fix LV 35° 500Lm 2700K 1-10V & Push	0P2803XXU13	220-240V	x	9,2	54	82	7,2	0,95	II
Pointer 68 fix LV 35° 525Lm 3000K 1-10V & Push	0P2803XXV13	220-240V	x	9,2	57	82	7,3	0,95	II
Pointer 68 fix LV 35° 550Lm 4000K 1-10V & Push	0P2803XXW13	220-240V	x	9,2	60	82	7,5	0,95	II
Pointer 68 fix LV 60° 550Lm 2700K 1-10V & Push	0P2803XXX13	220-240V	x	9,2	60	82	17,5	0,95	II
Pointer 68 fix LV 60° 600Lm 3000K 1-10V & Push	0P2803XXY13	220-240V	x	9,2	65	82	17,8	0,95	II
Pointer 68 fix LV 60° 650Lm 4000K 1-10V & Push	0P2803XXZ13	220-240V	x	9,2	71	82	18,0	0,95	II
Pointer 68 fix LV 35° 500Lm 2700K Dali	0P2803XXW013	220-240V	x	9,2	54	82	7,2	0,95	II
Pointer 68 fix LV 35° 525Lm 3000K Dali	0P2803XXW113	220-240V	x	9,2	57	82	7,3	0,95	II
Pointer 68 fix LV 35° 550Lm 4000K Dali	0P2803XXW213	220-240V	x	9,2	60	82	7,5	0,95	II
Pointer 68 fix LV 60° 550Lm 2700K Dali	0P2803XXW313	220-240V	x	9,2	60	82	17,5	0,95	II
Pointer 68 fix LV 60° 600Lm 3000K Dali	0P2803XXW413	220-240V	x	9,2	65	82	17,8	0,95	II
Pointer 68 fix LV 60° 650Lm 4000K Dali	0P2803XXW513	220-240V	x	9,2	71	82	18,0	0,95	II
Pointer 68 fix LVC 700mA 35° 500Lm 2700K Dim	0P2803XXWU11	700mA	11,5	8,0	63	82	7,2	x	III
Pointer 68 fix LVC 700mA 35° 525Lm 3000K Dim	0P2803XXWV11	700mA	11,5	8,0	66	82	7,3	x	III
Pointer 68 fix LVC 700mA 35° 550Lm 4000K Dim	0P2803XXWW11	700mA	11,5	8,0	69	82	7,5	x	III
Pointer 68 fix LVC 700mA 60° 550Lm 2700K Dim	0P2803XXWX11	700mA	11,5	8,0	69	82	17,5	x	III
Pointer 68 fix LVC 700mA 60° 600Lm 3000K Dim	0P2803XXWY11	700mA	11,5	8,0	75	82	17,8	x	III
Pointer 68 fix LVC 700mA 60° 650Lm 4000K Dim	0P2803XXWZ11	700mA	11,5	8,0	81	82	18,0	x	III

All values are measured at 230V (+/- 7%).



slightly different

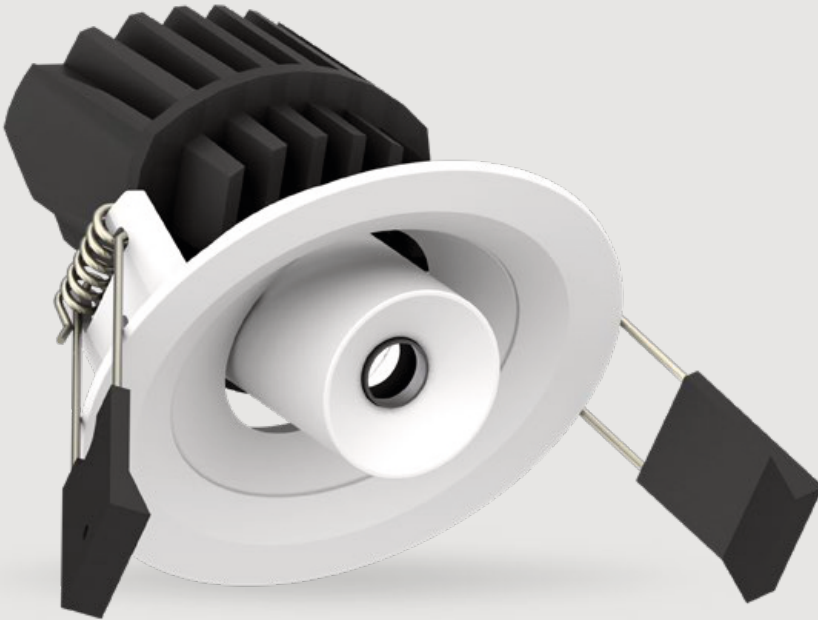

ø 80 mm

#### COLOURS




White  
RAL 9016 (XX=MW)



Matt black  
RAL 9005 (XX=BL)

#### ADJUSTMENT OPTIONS



35°

360°


#### SPRINGS



Standard with WS springs  
(gypsum/metal). Also  
available as above with  
CS springs (concrete)

# Pointer Spot 68 adj

## DIMENSIONS




### Incl. PSU (220-240V)

PSUTCI 127042 Triac dim	102x38x21mm
PSU TCI 125400 1-10V & Push	102x38x21mm
PSU TCI 127576 Dali	147x44x22 mm



### Incl. conn. box (500mA)\*

For installation to a central power supply.



## SPECIFICATIONS

Beam angle (FWHM)	35° (45° FWTM) / 60° (80° FWTM)
Fixture material	Housing: Die cast aluminium
Environment	Indoor
IP rate	IP20
IK rate	IK10
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 8742012

\*See page 174 for more information about power supplies.



Using WSsprings: Ø 68-75 mm.  
Thickness ceiling 1-15mm  
& recess depth 69 mm.



Using CSsprings. Ø 68-75 mm.  
Thickness ceiling 5-69 mm  
& recess depth 69 mm.



## ITEM SPECIFICATIONS [See pricelist 2025 page 9](#)

Description	Item code	Input	Vf	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Pointer Spot 68 adj LV 35° 350Lm 2700K Triac dim	0Q2703XXWN13	220-240V	x	6,6	53	82	6,7	0,96	II
Pointer Spot 68 adj LV 35° 375Lm 3000K Triac dim	0Q2703XXWP13	220-240V	x	6,6	57	82	6,9	0,96	II
Pointer Spot 68 adj LV 35° 400Lm 4000K Triac dim	0Q2703XXWQ13	220-240V	x	6,6	61	82	7,2	0,96	II
Pointer Spot 68 adj LV 60° 400Lm 2700K Triac dim	0Q2703XXWR13	220-240V	x	6,6	61	82	171	0,96	II
Pointer Spot 68 adj LV 60° 425Lm 3000K Triac dim	0Q2703XXWS13	220-240V	x	6,6	64	82	173	0,96	II
Pointer Spot 68 adj LV 60° 450Lm 4000K Triac dim	0Q2703XXWT13	220-240V	x	6,6	68	82	175	0,96	II
Pointer Spot 68 adj LV 35° 350Lm 2700K 1-10V & Push	0Q2703XXG13	220-240V	x	6,6	53	82	6,7	0,6	II
Pointer Spot 68 adj LV 35° 375Lm 3000K 1-10V & Push	0Q2703XXH13	220-240V	x	6,6	57	82	6,9	0,6	II
Pointer Spot 68 adj LV 35° 400Lm 4000K 1-10V & Push	0Q2703XXX13	220-240V	x	6,6	61	82	7,2	0,6	II
Pointer Spot 68 adj LV 60° 400Lm 2700K 1-10V & Push	0Q2703XXXK13	220-240V	x	6,6	61	82	171	0,6	II
Pointer Spot 68 adj LV 60° 425Lm 3000K 1-10V & Push	0Q2703XXL13	220-240V	x	6,6	64	82	173	0,6	II
Pointer Spot 68 adj LV 60° 450Lm 4000K 1-10V & Push	0Q2703XXM13	220-240V	x	6,6	68	82	175	0,6	II
Pointer Spot 68 adj LV 35° 350Lm 2700K Dali	0Q2703XXW013	220-240V	x	6,6	53	82	6,7	0,6	II
Pointer Spot 68 adj LV 35° 375Lm 3000K Dali	0Q2703XXW113	220-240V	x	6,6	57	82	6,9	0,6	II
Pointer Spot 68 adj LV 35° 400Lm 4000K Dali	0Q2703XXW213	220-240V	x	6,6	61	82	7,2	0,6	II
Pointer Spot 68 adj LV 60° 400Lm 2700K Dali	0Q2703XXW313	220-240V	x	6,6	61	82	171	0,6	II
Pointer Spot 68 adj LV 60° 425Lm 3000K Dali	0Q2703XXW413	220-240V	x	6,6	64	82	173	0,6	II
Pointer Spot 68 adj LV 60° 450Lm 4000K Dali	0Q2703XXW513	220-240V	x	6,6	68	82	175	0,6	II
Pointer Spot 68 adj LVC 500mA 35° 350Lm 2700K Dim	0Q2703XXWN11	500mA	114	5,7	61	82	6,7	x	III
Pointer Spot 68 adj LVC 500mA 35° 375Lm 3000K Dim	0Q2703XXWP11	500mA	114	5,7	66	82	6,9	x	III
Pointer Spot 68 adj LVC 500mA 35° 400Lm 4000K Dim	0Q2703XXWQ11	500mA	114	5,7	70	82	7,2	x	III
Pointer Spot 68 adj LVC 500mA 60° 400Lm 2700K Dim	0Q2703XXWR11	500mA	114	5,7	70	82	171	x	III
Pointer Spot 68 adj LVC 500mA 60° 425Lm 3000K Dim	0Q2703XXWS11	500mA	114	5,7	75	82	173	x	III
Pointer Spot 68 adj LVC 500mA 60° 450Lm 4000K Dim	0Q2703XXWT11	500mA	114	5,7	79	82	175	x	III

All values are measured at 230V (+/- 7%).




slightly different



← →  
ø 40 mm

**POINTER SPOTOPTIONS** [See pricelist 2025 page 8-9](#)



Pointer Spot SM 1L  
240 x 50 x 32



Pointer Spot SM 2L  
303x50x32



Pointer  
Spot WL


**COLOURS** [See page 66-67 for more info.](#)



Matt white RAL9016



Matt black RAL9005




**SPRINGS**



Standard with CSsprings  
(concrete/gyproc). Also  
available as above with  
WS springs (gyproc/metal).

# Pointer Spot 75 (adjustable)

## DIMENSIONS



\*For ws springs this dimension is 55 mm


### Incl. PSU (220-240V)

PSU TCI 127042 Triac dim 102x38x21mm  
 PSU TCI 125400 1-10V & Push 102x38x21mm  
 PSU TCI 127576 DALI 147x44x22 mm



### Incl. conn. box (500mA)\*

For installation to a central power supply.



## SPECIFICATIONS

Beam angle (FWHM)	35° (45° FWTM) / 60° (80° FWTM)
Fixture material	Housing: Die cast aluminium
Environment	Indoor
IP rate	IP20
IK rate	IK10
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

\*See page 174 for more information about power supplies.



Using CS springs: Ø 75 mm.  
 Thickness ceiling 5-60 mm  
 & recess depth 60 mm.



Using WS springs: Ø 77 mm.  
 Thickness ceiling 1-55 mm  
 & recess depth 60 mm.



## ITEM SPECIFICATIONS [See pricelist 2025 page 10-13](#)

Description	Item code	Input	VI	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Pointer Spot 75 LV35° 500Lm 2700K Triac dim	0T2703XXLG02	220-240V	x	9,2	54	82	9,8	0,96	II
Pointer Spot 75 LV35° 525Lm 3000K Triac dim	0T2703XXLH02	220-240V	x	9,2	57	82	9,9	0,96	II
Pointer Spot 75 LV35° 550Lm 4000K Triac dim	0T2703XXLJ02	220-240V	x	9,2	60	82	10,1	0,96	II
Pointer Spot 75 LV60° 550Lm 2700K Triac dim	0T2703XXLK02	220-240V	x	9,2	60	82	20	0,96	II
Pointer Spot 75 LV60° 600Lm 3000K Triac dim	0T2703XXLL02	220-240V	x	9,2	65	82	20,3	0,96	II
Pointer Spot 75 LV60° 650Lm 4000K Triac dim	0T2703XXLM02	220-240V	x	9,2	71	82	20,6	0,96	II
Pointer Spot 75 LV35° 500Lm 2700K 1-10V & Push	0T2703XXWG02	220-240V	x	9,2	54	82	9,8	0,95	II
Pointer Spot 75 LV35° 525Lm 3000K 1-10V & Push	0T2703XXWH02	220-240V	x	9,2	57	82	9,9	0,95	II
Pointer Spot 75 LV35° 550Lm 4000K 1-10V & Push	0T2703XXWJ02	220-240V	x	9,2	60	82	10,1	0,95	II
Pointer Spot 75 LV60° 550Lm 2700K 1-10V & Push	0T2703XXWK02	220-240V	x	9,2	60	82	20	0,95	II
Pointer Spot 75 LV60° 600Lm 3000K 1-10V & Push	0T2703XXWL02	220-240V	x	9,2	65	82	20,3	0,95	II
Pointer Spot 75 LV60° 650Lm 4000K 1-10V & Push	0T2703XXWM02	220-240V	x	9,2	71	82	20,6	0,95	II
Pointer Spot 75 LV35° 500Lm 2700K DALI	0T2703XXL002	220-240V	x	9,2	54	82	9,8	0,95	II
Pointer Spot 75 LV35° 525Lm 3000K DALI	0T2703XXL102	220-240V	x	9,2	57	82	9,9	0,95	II
Pointer Spot 75 LV35° 550Lm 4000K DALI	0T2703XXL202	220-240V	x	9,2	60	82	10,1	0,95	II
Pointer Spot 75 LV60° 550Lm 2700K DALI	0T2703XXL302	220-240V	x	9,2	60	82	20	0,95	II
Pointer Spot 75 LV60° 600Lm 3000K DALI	0T2703XXL402	220-240V	x	9,2	65	82	20,3	0,95	II
Pointer Spot 75 LV60° 650Lm 4000K DALI	0T2703XXL502	220-240V	x	9,2	71	82	20,6	0,95	II
Pointer Spot 75 LVC 700mA 35° 500Lm 2700K Dim	0T2703XXLGE2	700mA	114	8	63	82	9,8	x	III
Pointer Spot 75 LVC 700mA 35° 525Lm 3000K Dim	0T2703XXLHE2	700mA	114	8	66	82	9,9	x	III
Pointer Spot 75 LVC 700mA 35° 550Lm 4000K Dim	0T2703XXLJE2	700mA	114	8	69	82	10,1	x	III
Pointer Spot 75 LVC 700mA 60° 550Lm 2700K Dim	0T2703XXLKE2	700mA	114	8	69	82	20	x	III
Pointer Spot 75 LVC 700mA 60° 600Lm 3000K Dim	0T2703XXLLE2	700mA	114	8	75	82	20,3	x	III
Pointer Spot 75 LVC 700mA 60° 650Lm 4000K Dim	0T2703XXLME2	700mA	114	8	81	82	20,6	x	III

LV versions also available with No dim. Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%).



slightly different



↔  
ø 48 mm

**POINTER SPOTOPTIONS** See pricelist 2025 page 8-9



Pointer Spot  
Pendant 3F

Pointer Spot  
Pendant 48V

Pointer Spot  
Pendant SM

**COLOURS** See page 66-67 for more info.




Pointer Spot Track 3F

Pointer Spot Track 48V

# Pointer Spot Pendant 3F

## DIMENSIONS

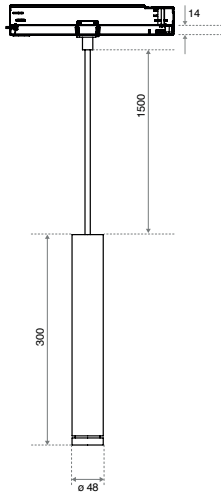

## TRACKS230V & 48V

On request! Ask our sales department about the possibilities.



## SPECIFICATIONS

Beam angle (FWHM)	35° (45° FWTM) / 60° (80° FWTM)
Fixture material	Housing: Die cast aluminium
Environment	Indoor
IP rate	IP20
IK rate	IK10
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



## ITEM SPECIFICATIONS See pricelist 2025 page 10-13


Description	Item code	Input	Vf	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Pointer Spot Pendant 3F 500Lm 2700K CRI8235° No dim	0Y2703XXLU02	220-240V	x	9,2	54	82	8,5	0,95	I
Pointer Spot Pendant 3F 525Lm 3000K CRI8235° No dim	0Y2703XXLV02	220-240V	x	9,2	57	82	8,7	0,95	I
Pointer Spot Pendant 3F 550Lm 4000K CRI8235° No dim	0Y2703XXLW02	220-240V	x	9,2	60	82	8,8	0,95	I
Pointer Spot Pendant 3F 550Lm 2700K CRI8260° No dim	0Y2703XXLX02	220-240V	x	9,2	60	82	188	0,95	I
Pointer Spot Pendant 3F 600Lm 3000K CRI8260° No dim	0Y2703XXLY02	220-240V	x	9,2	65	82	191	0,95	I
Pointer Spot Pendant 3F 650Lm 4000K CRI8260° No dim	0Y2703XXLZ02	220-240V	x	9,2	71	82	194	0,95	I
Pointer Spot Pendant 3F 500Lm 2700K CRI8235° Dali	0Y2703XXL002	220-240V	x	9,2	54	82	8,5	0,97	I
Pointer Spot Pendant 3F 525Lm 3000K CRI8235° Dali	0Y2703XXL102	220-240V	x	9,2	57	82	8,7	0,97	I
Pointer Spot Pendant 3F 550Lm 4000K CRI8235° Dali	0Y2703XXL202	220-240V	x	9,2	60	82	8,8	0,97	I
Pointer Spot Pendant 3F 550Lm 2700K CRI8260° Dali	0Y2703XXL302	220-240V	x	9,2	60	82	188	0,97	I
Pointer Spot Pendant 3F 600Lm 3000K CRI8260° Dali	0Y2703XXL402	220-240V	x	9,2	65	82	191	0,97	I
Pointer Spot Pendant 3F 650Lm 4000K CRI8260° Dali	0Y2703XXL502	220-240V	x	9,2	71	82	194	0,97	I

All values are measured at 230V (+/- 7%).


slightly different

# Colour options

Pointer Spots  
Standard colours

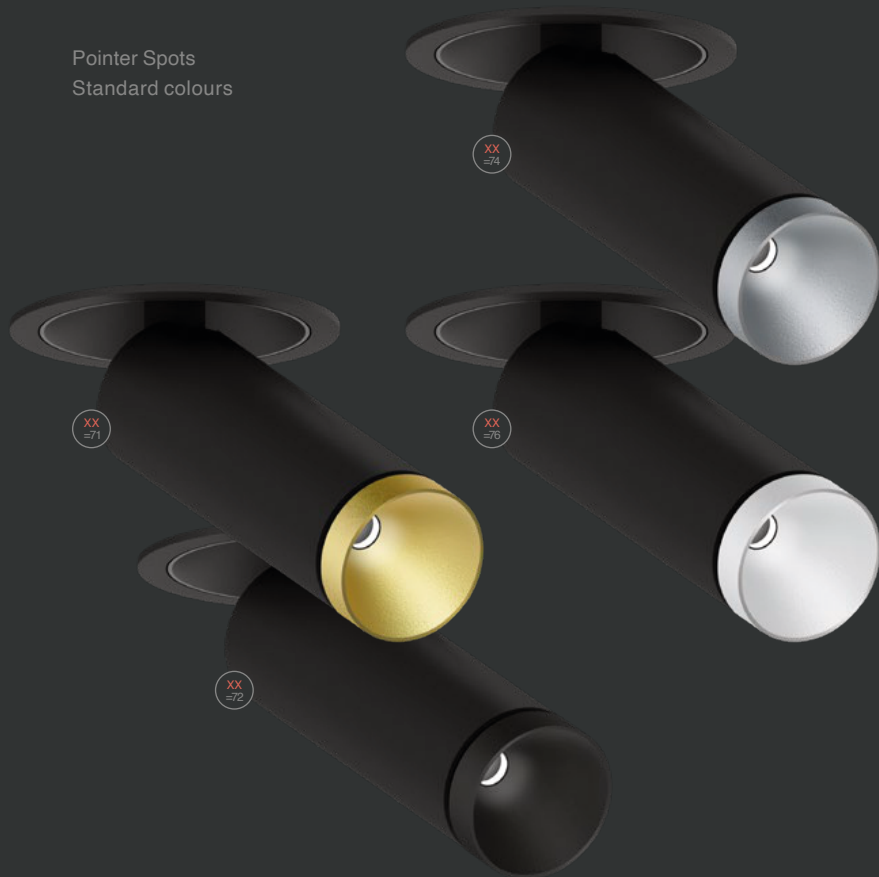


Inspiration colours (Ask MIYO for the possibilities)

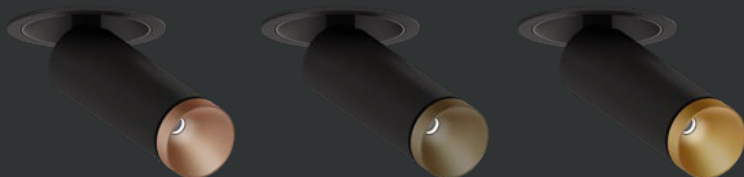




### Itemcodes


Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/White	XX=76



slightly different


# 48V Track system accessories diagram

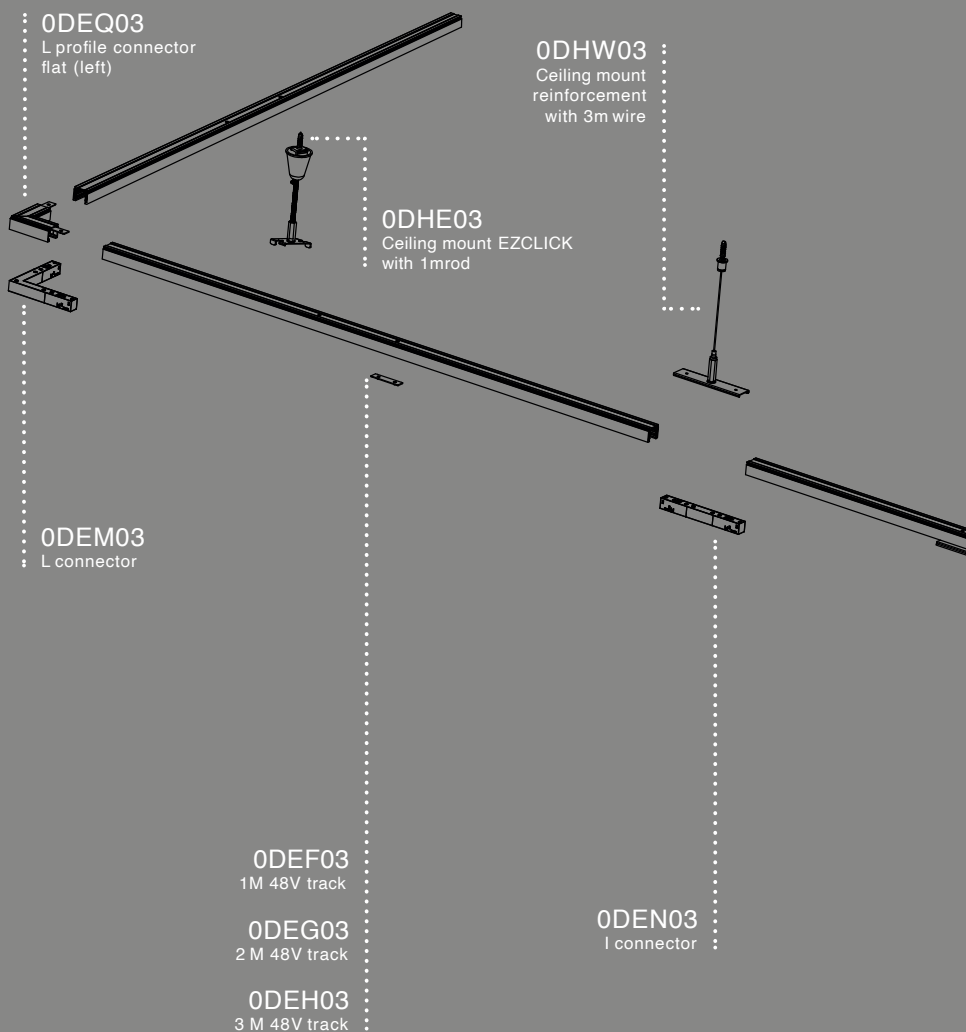

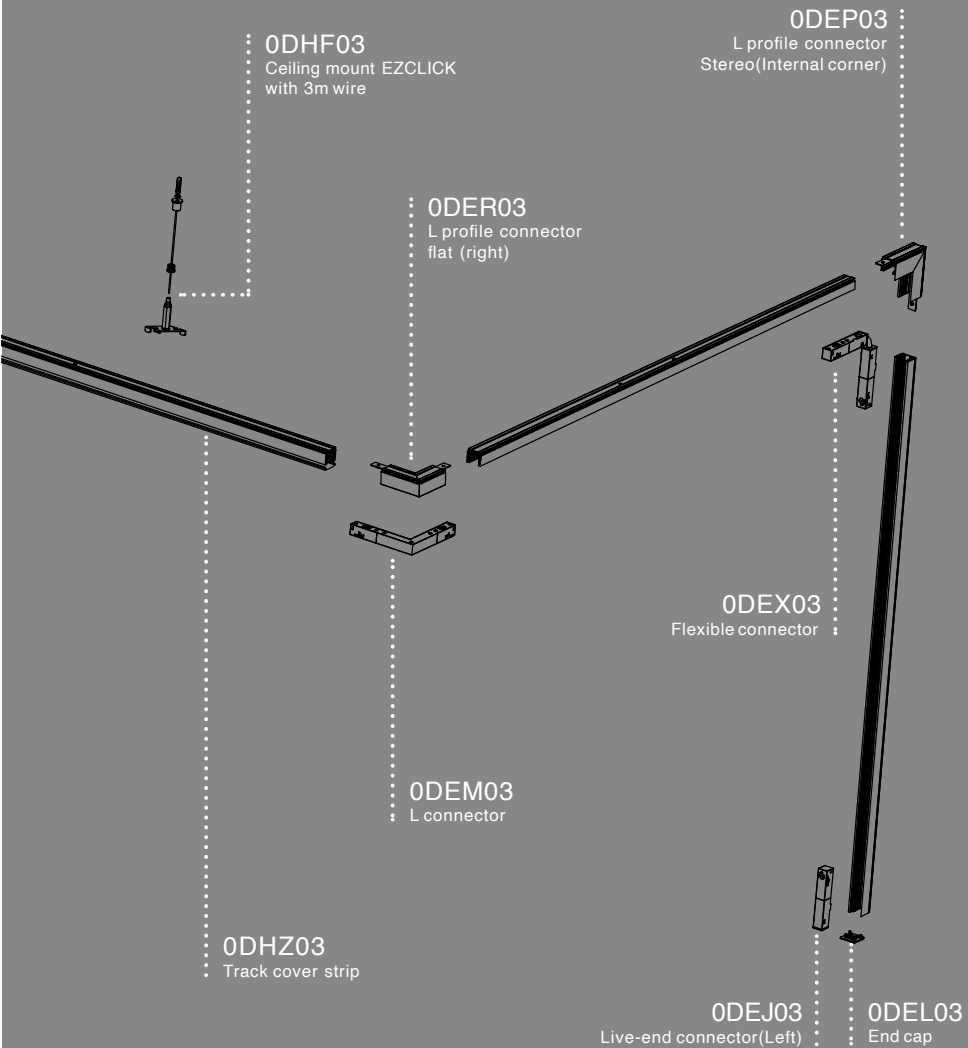


Living room  
Fido 98 HV-FD  
4000K 800Lm 40°


**S**light®  
slightly different



Restaurant  
Fido 108HV-FD  
3000K 800Lm 40°



slightly different




Fido Series  
Ceiling lights  
Fido CL 105




Special colours possible

Wall lights  
Hotel corridor  
Fido WL 105

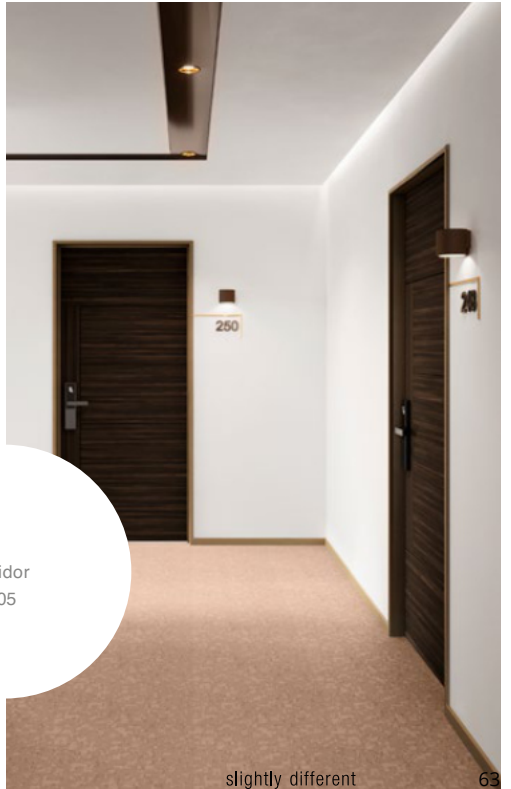

slightly different

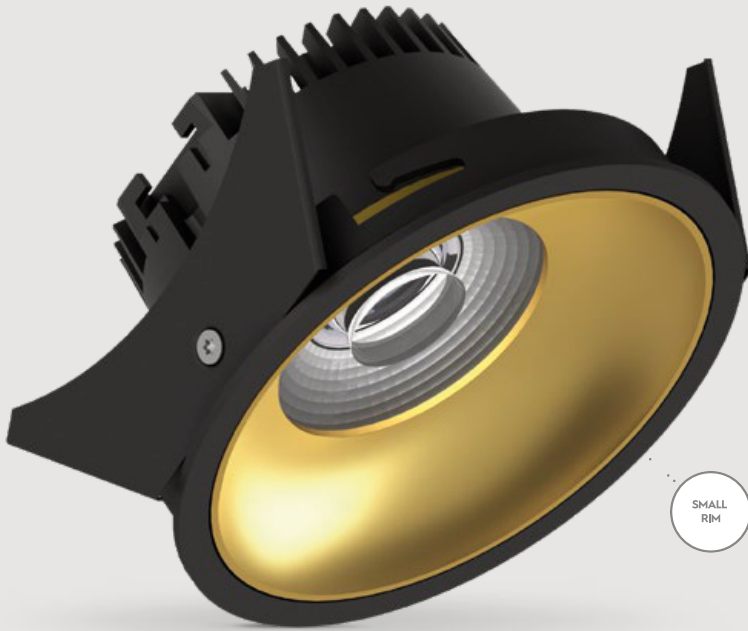

SMALL RIM



ø 104 mm

### BEAM ANGLE



Reflector  
LV: 24° / 60°  
LV-TW: 60°



Lens  
HV-FD: 40°



Diffuser  
HV-FD: 80°  
LV: 80°  
LV-TW 80°


### COLOURS



Matt black  
RAL 9005



Matt white  
RAL 9016



Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/White	XX=76


### SPRINGS



Standard with CSsprings  
(concrete/gyproc). Also  
available as above with  
WS springs (gyproc/  
metal).

# Fido 98

## DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years



Using CS springs: Ø 98 mm.  
Thickness ceiling 5-59 mm  
& recess depth 59 mm.



Using WS springs: Ø 98 mm.  
Thickness ceiling 1-50 mm  
& recess depth 59 mm.

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.



This luminaire contains built-in LED lamps.  
There are no exchangeable parts inside the luminaire.  
EU 874/2012



## ITEM SPECIFICATIONS See pricelist 2025 page 34

Description	40°		80°		W per lamp	Lm/ W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR					
HV-FD 800Lm 2700K Triac dim	F12A03XX5A02	13.7	F12A03XX5B02	24.8	10.5	76	93	0.99	I
HV-FD 800Lm 3000K Triac dim	F12A03XX5C02	13.7	F12A03XX5D02	24.8	10.3	78	93	0.99	I
HV-FD 800Lm 4000K Triac dim	F12A03XX5E02	13.7	F12A03XX5F02	24.8	10.1	79	93	0.99	I
HV-FD 800Lm 2200-3000K Triac dim	F12A03XX5G02	13.7	F12A03XX5H02	24.8	10.3	78	93	0.99	I

Description	24°		60°		80°		W per lamp	Lm/ W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	F13A03XX4K02	22.0	F13A03XX4L02	22.9	F13A03XX4M02	27.3	12.9	125	82	0.93	II
LV-HE 1650Lm2700K CRI82 Dali	F13A03XX4B02	22.0	F13E03XX4E02	22.9	F13E03XX4H02	27.3	12.9	125	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	F13B03XX4K02	22.2	F13B03XX4L02	23.0	F13B03XX4M02	27.5	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dali	F13B03XX4B02	22.2	F13B03XX4E02	23.0	F13B03XX4H02	27.5	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	F13E03XX4K02	22.2	F13E03XX4L02	23.1	F13E03XX4M02	27.5	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dali	F13E03XX4B02	22.2	F13E03XX4E02	23.1	F13E03XX4H02	27.5	12.9	136	82	0.95	II
LV 1150Lm2700K CRI97 No dim	F15A03XX4K02	20.8	F15A03XX4L02	21.6	F15A03XX4M02	26.1	13.8	83	97	0.93	II
LV 1150Lm2700K CRI97 Dali	F15A03XX4B02	20.8	F15A03XX4E02	21.6	F15A03XX4H02	26.1	13.8	83	97	0.95	II
LV 1250Lm3000K CRI97 No dim	F15B03XX4K02	21.1	F15B03XX4L02	21.9	F15B03XX4M02	26.4	13.8	91	97	0.93	II
LV 1250Lm3000K CRI97 Dali	F15B03XX4B02	21.1	F15B03XX4E02	21.9	F15B03XX4H02	26.4	13.8	91	97	0.95	II
LV 1350Lm4000K CRI97 No dim	F15G03XX4K02	21.3	F15G03XX4L02	22.2	F15G03XX4M02	26.6	13.8	98	97	0.93	II
LV 1350Lm4000K CRI97 Dali	F15G03XX4B02	21.3	F15G03XX4E02	22.2	F15G03XX4H02	26.6	13.8	98	97	0.95	II
LV 1250Lm1800-3000K CRI97 Dali	F15E03XX4B02	21.1	F15E03XX4E02	21.9	F15E03XX4H02	26.4	13.8	91	97	0.95	II
LV-TW 1250Lm2700-6500K CRI95/86 Dali	-	-	F16A03XX4W02	21.9	F16A03XX4Y02	26.4	11.4	110	95/86	0.90	II

LV versions also available with: Triac dim Casambi 1-10V& Push Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.




slightly different




# SensorFido 98

## DIMENSIONS



## DETECTION AREA



## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP44
IK rate	IK03
Operating temperature (Ta)	-20°C / +30°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years
Detection range	120°
Turn-on time	200 ms
Inrush current	0 mA (max. 220 pcs. per type B16Amp)
Surge protection	L-N > 1kV; L-E, N-E > 2kV
Audible noise	21dB
Time setting	4 min. (cannot be changed)

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



Using CS springs: Ø 98 mm.  
Thickness ceiling 5-59 mm  
& recess depth 59 mm.



Using WS springs: Ø 98 mm.  
Thickness ceiling 1-50 mm  
& recess depth 59 mm.



Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.



Sensor luminaires turn on for 4 minutes after detecting movement.



## ITEM SPECIFICATIONS See pricelist 2025 page 58

Description	Item code	Extra	Input	W per lamp	Lm/W	CRI (typ.)	UGR	PF	Safety class
SensorFido 98 HV 600 Lm 3000K 80°	F12S03XX5D02	Incl. 3P conn.box	220-240V	15.0	40	83	23.8	0.99	I
SensorFido 98 HV 600 Lm 4000K 80°	F12S03XX5F02	Incl. 3P conn.box	220-240V	15.0	40	83	23.8	0.99	I

All values are measured at 230V (+/- 7%).




slightly different



# Fido 108

## DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	5.0	475	500	525	95	100	105
Special request	250	9.8	850	900	1000	87	92	102
Standard	350	13.8	1150	1250	1350	83	91	98



Using CS springs: Ø 108 mm.  
Thickness ceiling 5-65 mm  
& recess depth 65 mm.



Using WS springs: Ø 108 mm.  
Thickness ceiling 1-30 mm  
& recess depth 65 mm.

For soft ceiling tiles we recommend using a wooden plate or a ceiling ring on the reverse side of the tile.



## ITEM SPECIFICATIONS See pricelist 2025 page 37

Description	40°		80°		W per lamp	Lm / W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR					
HV-FD 800Lm 2700K Triac dim	F22B03XX5A02	13.7	F22B03XX5B02	24.8	10.5	76	93	0.99	I
HV-FD 800Lm 3000K Triac dim	F22B03XX5C02	13.7	F22B03XX5D02	24.8	10.3	78	93	0.99	I
HV-FD 800Lm 4000K Triac dim	F22B03XX5E02	13.7	F22B03XX5F02	24.8	10.1	79	93	0.99	I
HV-FD 800Lm 2200-3000K Triac dim	F22B03XX5G02	13.7	F22B03XX5H02	24.8	10.3	78	93	0.99	I

Description	24°		60°		80°		W per lamp	Lm / W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	F23C03XX4K02	24.1	F23C03XX4L02	24.9	F23C03XX4M02	29.4	12.9	128	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dalí	F23C03XX4B02	24.1	F23C03XX4E02	24.9	F23C03XX4H02	29.4	12.9	128	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	F23D03XX4K02	24.2	F23D03XX4L02	25.1	F23D03XX4M02	29.6	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dalí	F23D03XX4B02	24.2	F23D03XX4E02	25.1	F23D03XX4H02	29.6	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	F23F03XX4K02	24.3	F23F03XX4L02	25.2	F23F03XX4M02	29.6	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dalí	F23F03XX4B02	24.3	F23F03XX4E02	25.2	F23F03XX4H02	29.6	12.9	136	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	F25C03XX4K02	20.8	F25C03XX4L02	21.6	F25C03XX4M02	26.1	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 Dalí	F25C03XX4B02	20.8	F25C03XX4E02	21.6	F25C03XX4H02	26.1	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	F25D03XX4K02	21.1	F25D03XX4L02	21.9	F25D03XX4M02	26.4	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 Dalí	F25D03XX4B02	21.1	F25D03XX4E02	21.9	F25D03XX4H02	26.4	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	F25H03XX4K02	21.3	F25H03XX4L02	22.2	F25H03XX4M02	26.6	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 Dalí	F25H03XX4B02	21.3	F25H03XX4E02	22.2	F25H03XX4H02	26.6	13.8	98	97	0.95	II
LV 1250Lm 1800-3000K CRI97 Dalí	F25F03XX4B02	21.1	F25F03XX4E02	21.9	F25F03XX4H02	26.4	13.8	91	97	0.95	II
LV-TW 1250Lm 2700-6500K CRI95/86 Dalí	-	-	F26B03XX4W02	21.9	F26B03XX4Y02	26.4	11.4	110	95/86	0.90	II

LV versions also available with: Triac dim Casambi 1-10V & Push Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.



slightly different




NO SCREWS  
VISIBLE




ø 104 mm

### BEAM ANGLE



Reflector  
HV-FD: 40°



Diffuser  
HV-FD: 80°


### COLOURS



Matt black  
RAL 9005



Matt white  
RAL 9016



61

62

65

71

72

76

Housing/  
Reflector ring

Item  
code

Housing/  
Reflector ring

Item  
code

White/Gold

XX=61

Black/Gold

XX=71

White/Black

XX=62

Black/Black

XX=72

White/White


XX=65

Black/White


XX=76

# Fido CL 105

## DIMENSIONS



## FIXATION DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	40° / 80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

IP20

MADE IN HOLLAND

7 YEAR WARRANTY

ECO

bhc

CREE

bridgelux


## ITEM SPECIFICATIONS See pricelist 2025 page 60

Description	40°		80°		W per lamp	Lm/ W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR					
Fido CL 105HV-FD 800Lm 2700K Triac dim	F32A03XX5A02	13.7	F32A03XX5B02	24.8	10.5	76	93	0.99	II
Fido CL 105HV-FD 800Lm 3000K Triac dim	F32A03XX5C02	13.7	F32A03XX5D02	24.8	10.3	78	93	0.99	II
Fido CL 105HV-FD 800Lm 4000K Triac dim	F32A03XX5E02	13.7	F32A03XX5F02	24.8	10.1	79	93	0.99	II
Fido CL 105HV-FD 800Lm 2200-3000K Triac dim	F32A03XX5G02	13.7	F32A03XX5H02	24.8	10.3	78	93	0.99	II

All values are measured at 230V (+/- 7%).



slightly different

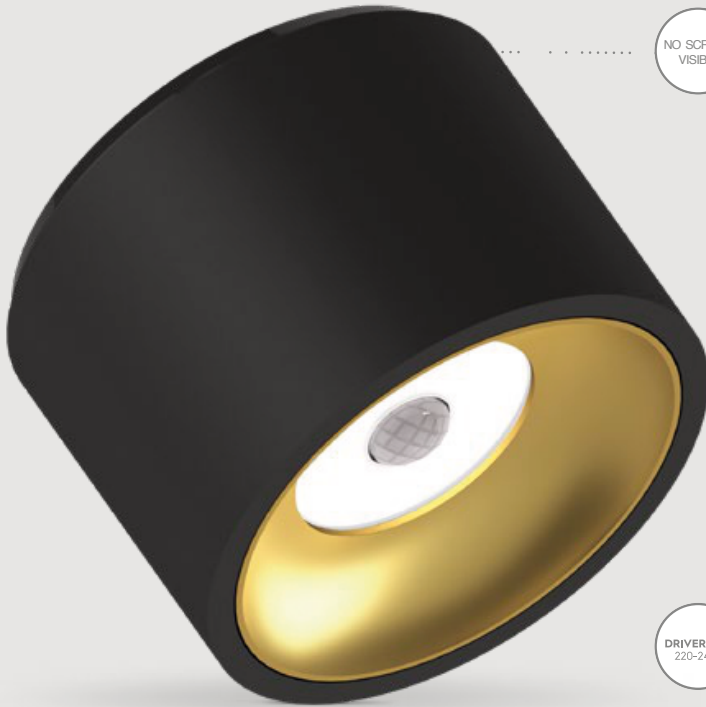

NO SCREWS  
VISIBLE

DRIVERLESS  
220-240V



ø 104 mm


## COLOURS



Matt black  
RAL 9005




Matt white  
RAL 9016




Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/ White	XX=76

# SensorFido CL 105



## DIMENSIONS



## FIXATION DIMENSIONS



## DETECTION AREA



## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C/ +30°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years
Detection range	120°
Turn-on time	200 ms
Inrush current	0 mA (max. 220 pcs. per type B16Amp)
Surge protection	L-N > 1Kv; L-E, N-E > 2Kv
Audible noise	21dB
Time setting	4 min. (cannot be changed)

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

IP20



Sensor luminaires turn on for 4 minutes after detecting movement.



bhc CREE


## ITEM SPECIFICATIONS [See pricelist 2025 page 59](#)

Description	Item code	Input	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
SensorFido CL 105HV 600 Lm 3000K 80°	F32S03XX5D02	220-240V	15.0	40	83	23.8	0.99	II
SensorFido CL 105HV 600 Lm 4000K 80°	F32S03XX5F02	220-240V	15.0	40	83	23.8	0.99	II

All values are measured at 230V (+/- 7%).




slightly different




ø 105 mm

### BEAM ANGLE




Reflector  
HV-FD: 40°



Diffuser  
HV-FD: 80°


### COLOURS



Matt black  
RAL 9005




Matt white  
RAL 9016




Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/White	XX=76

# Fido WL 105

## DIMENSIONS



## FIXATION DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	40° / 80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

IP20



## ITEM SPECIFICATIONS [See pricelist 2025 page 63](#)

Description	40°		80°		W per lamp	Lm/ W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR					
Fido WL 105HV-FD 800Lm 2700K Triac dim	F42A03XX5A02	137	F42A03XX5B02	24.8	10.5	76	93	0.99	II
Fido WL 105HV-FD 800Lm 3000K Triac dim	F42A03XX5C02	137	F42A03XX5D02	24.8	10.3	78	93	0.99	II
Fido WL 105HV-FD 800Lm 4000K Triac dim	F42A03XX5E02	137	F42A03XX5F02	24.8	10.1	79	93	0.99	II
Fido WL 105HV-FD 800Lm 2200-3000K Triac dim	F42A03XX5G02	137	F42A03XX5H02	24.8	10.3	78	93	0.99	II


All values are measured at 230V (+/- 7%).



slightly different



Slight®  
slightly different

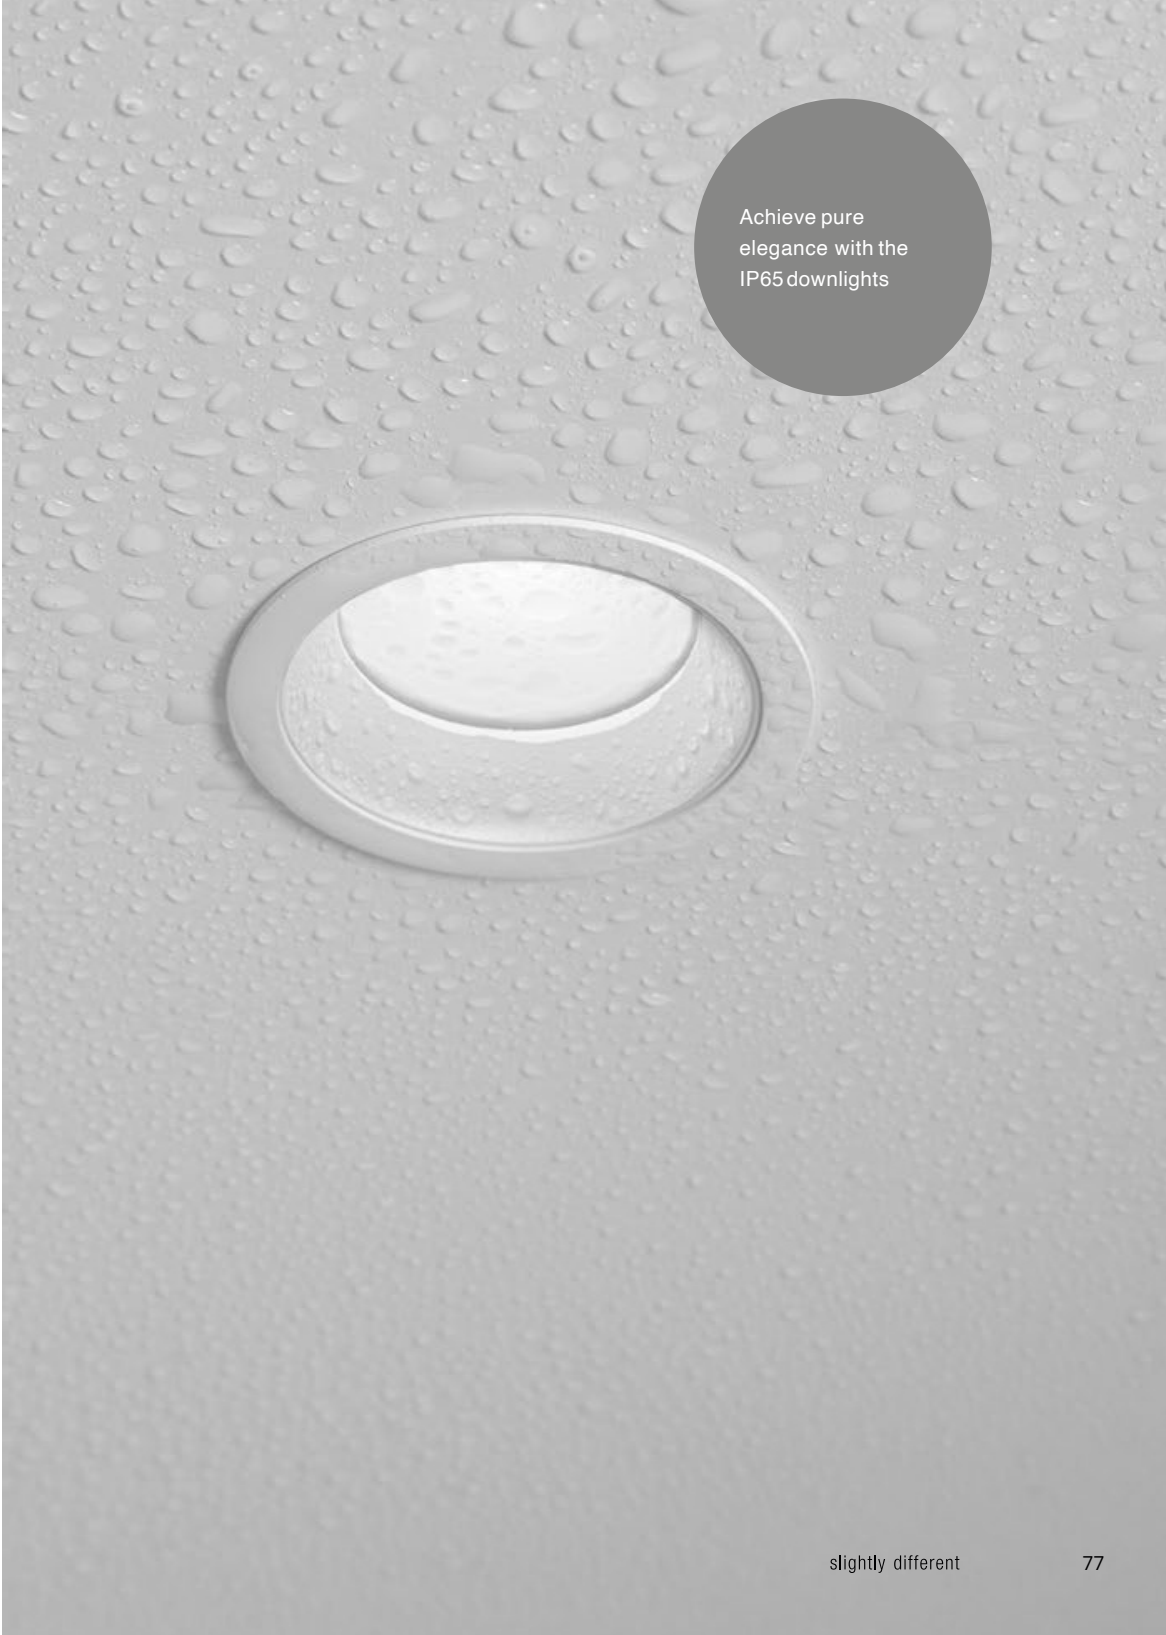

Achieve pure  
elegance with the  
IP65 downlights



**S**light<sup>®</sup>  
slightly different






**S**light<sup>®</sup>  
slightly different



Corridor  
Vector CL 235  
2525 Lm 3000K



ø 40 mm


**COLOURS**



Matt black  
RAL 9005



Matt white  
RAL 9016



Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/ White	XX=76


**SPRINGS**



Standard with CSsprings  
(concrete/gyproc). Also  
available as above with  
WS springs (gyproc/  
metal).


# Strada 35

## DIMENSIONS




- \* This distance is necessary because of the height of the connection box (80 mm).  
For purely heat reasons just 5 mm is sufficient.
- \*\* For WSsprings this dimension is 60 mm

Incl. PSU No dim (100-240V)



Incl. conn.box (500mA)\*

For installation to a central power supply.



## SPECIFICATIONS

Beam angle (FWHM)	40° (65° FWTM)
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

\*See page 174 for more information about power supplies.



Using CS springs: Ø 35 mm.  
Thickness ceiling 5-80 mm  
& recess depth 80 mm.



Using WS springs: Ø 36 mm.  
Thickness ceiling 1-50 mm  
& recess depth 80 mm.



Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.



## ITEM SPECIFICATIONS See pricelist 2025 page 6

Description	Item code	Input	Vf	W per lamp	Lm/W	CFI (typ.)	UGR	Pf	Safety class
Strada 35 LV 475Lm 2700K No dim	851903XX0102	100-240V	x	6.6	72	82	150	0.6	II
Strada 35 LV 500Lm 3000K No dim	851903XX7202	100-240V	x	6.6	76	82	152	0.6	II
Strada 35 LV 525Lm 4000K No dim	851903XX0202	100-240V	x	6.6	80	82	154	0.6	II
Strada 35 LVC 500mA 475Lm 2700K Dim	851903XX01E2	500mA	119	5.7	83	82	150	x	III
Strada 35 LVC 500mA 500Lm 3000K Dim	851903XX72E2	500mA	119	5.7	88	82	152	x	III
Strada 35 LVC 500mA 525Lm 4000K Dim	851903XX02E2	500mA	119	5.7	92	82	154	x	III

All values are measured at 230V (+/- 7%).



slightly different



ø 55 mm


**COLOURS**



Matt black  
RAL 9005



Matt white  
RAL 9016



Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/ White	XX=76


**SPRINGS**



Standard with CSsprings  
(concrete/gyproc). Also  
available as above with  
WS springs (gyproc/  
metal).

# Strada 50

## DIMENSIONS




Incl. PSU (220-240V)

PSUTCI 127042 Triac dim 102x38x21 mm  
PSUTCI 127576 Dali 147x44x22 mm



Incl. conn. box (500mA)\*

For installation to a central power supply.



## SPECIFICATIONS

Beam angle (FWHM)	40° (65° FWTM)
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C/ +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

\*See page 174 for more information about power supplies.



Using CS springs: Ø 50 mm.  
Thickness ceiling 5-50 mm  
& recess depth 50 mm.



Using WS springs: Ø 50 mm.  
Thickness ceiling 1-20 mm  
& recess depth 50 mm.



## ITEM SPECIFICATIONS [See pricelist 2025 page 7](#)

Description	Item code	Input	Vf	W per lamp	Lm/W	CRi (typ.)	UGR	Pf	Safety class
Strada 50 adj LV 475Lm 2700K Triac dim	851A03XX0102	220-240V	x	6.6	72	82	15.0	0.96	II
Strada 50 adj LV 500Lm 3000K Triac dim	851A03XX7202	220-240V	x	6.6	76	82	15.2	0.96	II
Strada 50 adj LV 525Lm 4000K Triac dim	851A03XX0202	220-240V	x	6.6	80	82	15.4	0.96	II
Strada 50 adj LV 475Lm 2700K Dali	851A03XXS402	220-240V	x	6.6	72	82	15.0	0.95	II
Strada 50 adj LV 500Lm 3000K Dali	851A03XXS502	220-240V	x	6.6	76	82	15.2	0.95	II
Strada 50 adj LV 525Lm 4000K Dali	851A03XXS602	220-240V	x	6.6	80	82	15.4	0.95	II
Strada 50 adj LVC 500mA 475Lm 2700K Dim	851A03XX01E2	500mA	119	5.7	83	82	15.0	x	III
Strada 50 adj LVC 500mA 500Lm 3000K Dim	851A03XX72E2	500mA	119	5.7	88	82	15.2	x	III
Strada 50 adj LVC 500mA 525Lm 4000K Dim	851A03XX02E2	500mA	119	5.7	92	82	15.4	x	III

All values are measured at 230V (+/- 7%).



slightly different

New LV CRI82 versions available.



ø 80 mm

**BEAM ANGLE**



Reflector  
LV: 24° / 60°



Diffuser  
LV: 80°


**COLOURS**



Matt black  
RAL 9005



Matt white  
RAL 9016




Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/ White	XX=76

**SPRINGS**

Standard with WS springs  
(gyproc/metal). No other  
springs available.

# Strada 68

## DIMENSIONS



## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136

## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP44 and IP65
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	5.0	475	500	525	95	100	105
Special request	250	9.8	850	900	1000	87	92	102
Standard	350	13.8	1150	1250	1350	83	91	98



Using WS springs: Ø 68 mm. Thickness ceiling 1-54 mm & recess depth 60 mm.

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.



This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

eldoLED   
CASAMBI

## ITEM SPECIFICATIONS See pricelist 2025 page 14


Description Strada 68	24°		60°		80°		W per lamp	Lm / W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	85SH03XX9K02	24.1	85SH03XX9L02	24.9	85SH03XX9M02	29.4	12.9	128	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dali	85SH03XX9B02	24.1	85SH03XX9E02	24.9	85SH03XX9H02	29.4	12.9	128	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	85SJ03XX9K02	24.2	85SJ03XX9L02	25.1	85SJ03XX9M02	29.6	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dali	85SJ03XX9B02	24.2	85SJ03XX9E02	25.1	85SJ03XX9H02	29.6	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	85SK03XX9K02	24.3	85SK03XX9L02	25.2	85SK03XX9M02	29.6	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dali	85SK03XX9B02	24.3	85SK03XX9E02	25.2	85SK03XX9H02	29.6	12.9	136	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	85RH03XX9K02	22.8	85RH03XX9L02	23.7	85RH03XX9M02	28.1	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 Dali	85RH03XX9B02	22.8	85RH03XX9E02	23.7	85RH03XX9H02	28.1	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	85RJ03XX9K02	23.1	85RJ03XX9L02	24.0	85RJ03XX9M02	28.4	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 Dali	85RJ03XX9B02	23.1	85RJ03XX9E02	24.0	85RJ03XX9H02	28.4	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	85RK03XX9K02	23.4	85RK03XX9L02	24.2	85RK03XX9M02	28.7	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 Dali	85RK03XX9B02	23.4	85RK03XX9E02	24.2	85RK03XX9H02	28.7	13.8	98	97	0.95	II
LV 1250Lm 1800-3000K CRI97 Dali	85RL03XX9B02	23.1	85RL03XX9E02	24.0	85RL03XX9H02	28.4	13.8	91	97	0.95	II
LV versions also available with:	Triac dim Casambi		1-10V & Push		Check our datasheets, pricelist or website for all available versions						
Description Strada 68	24°		60°		80°		W per lamp	Lm / W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	85SN03XX9K02	24.1	85SN03XX9L02	24.9	85SN03XX9M02	29.4	12.9	128	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dali	85SN03XX9B02	24.1	85SN03XX9E02	24.9	85SN03XX9H02	29.4	12.9	128	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	85SP03XX9K02	24.2	85SP03XX9L02	25.1	85SP03XX9M02	29.6	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dali	85SP03XX9B02	24.2	85SP03XX9E02	25.1	85SP03XX9H02	29.6	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	85SQ03XX9K02	24.3	85SQ03XX9L02	25.2	85SQ03XX9M02	29.6	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dali	85SQ03XX9B02	24.3	85SQ03XX9E02	25.2	85SQ03XX9H02	29.6	12.9	136	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	85RN03XX9K02	22.8	85RN03XX9L02	23.7	85RN03XX9M02	28.1	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 Dali	85RN03XX9B02	22.8	85RN03XX9E02	23.7	85RN03XX9H02	28.1	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	85RP03XX9K02	23.1	85RP03XX9L02	24.0	85RP03XX9M02	28.4	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 Dali	85RP03XX9B02	23.1	85RP03XX9E02	24.0	85RP03XX9H02	28.4	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	85RQ03XX9K02	23.4	85RQ03XX9L02	24.2	85RQ03XX9M02	28.7	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 Dali	85RQ03XX9B02	23.4	85RQ03XX9E02	24.2	85RQ03XX9H02	28.7	13.8	98	97	0.95	II
LV 1250Lm 1800-3000K CRI97 Dali	85RR03XX9B02	23.1	85RR03XX9E02	24.0	85RR03XX9H02	28.4	13.8	91	97	0.95	II

All values are measured at 230V (+/- 7%).



slightly different

New LV CRI82 versions available.




ø 81 mm

**BEAM ANGLE**



Reflector  
LV: 24° / 60°  
LV-TW: 60°



Lens  
HV-FD: 40°



Diffuser  
HV-FD: 80°  
LV: 80°  
LV-TW 80°


**COLOURS**



Matt black  
RAL 9005



Matt white  
RAL 9016



Housing/  
Reflector ring

Item  
code

Housing/  
Reflector ring

Item  
code

White/Gold

XX=61

Black/Gold

XX=71

White/Silver

XX=63

Black/Silver

XX=74

White/Black

XX=62

Black/Black

XX=72

White/White

XX=65

Black/ White

XX=76


**SPRINGS**



Standard with CSsprings  
(concrete/gyproc). Also  
available as above with  
WS springs (gyproc/  
metal).

# Strada 75

## DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years
This luminaire contains built-in LED lamps.	
There are no exchangeable parts inside the luminaire.	
EU 874/2012	

## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	5.0	475	500	525	95	100	105
Special request	250	9.8	850	900	1000	87	92	102
Standard	350	13.8	1150	1250	1350	83	91	98



Using CS springs: Ø 75 mm.  
Thickness ceiling 5-60 mm  
& recess depth 60 mm.



Using WS springs: Ø 77 mm.  
Thickness ceiling 1-55 mm  
& recess depth 60 mm.

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.



eldoLED   
CASAMBI

## ITEM SPECIFICATIONS See pricelist 2025 page 16

Description	40°		80°		W per lamp	Lm / W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR					
Strada 75									
HV-FD 800Lm 2700K Triac dim	852A03XX5A02	15.7	852A03XX5B02	26.9	10.5	76	93	0.99	I
HV-FD 800Lm 3000K Triac dim	852A03XX5C02	15.7	852A03XX5D02	26.9	10.3	78	93	0.99	I
HV-FD 800Lm 4000K Triac dim	852A03XX5E02	15.7	852A03XX5F02	26.9	10.1	79	93	0.99	I
HV-FD 800Lm 2200-3000K Triac dim	852A03XX5G02	15.7	852A03XX5H02	26.9	10.3	78	93	0.99	I

Description	24°		60°		80°		W per lamp	Lm / W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	853A03XX4K02	24.1	853A03XX4L02	24.9	853A03XX4M02	29.4	12.9	128	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dalí	853A03XX4B02	24.1	853A03XX4E02	24.9	853A03XX4H02	29.4	12.9	128	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	853B03XX4K02	24.2	853B03XX4L02	25.1	853B03XX4M02	29.6	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dalí	853B03XX4B02	24.2	853B03XX4E02	25.1	853B03XX4H02	29.6	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	853E03XX4K02	24.3	853E03XX4L02	25.2	853E03XX4M02	29.6	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dalí	853E03XX4B02	24.3	853E03XX4E02	25.2	853E03XX4H02	29.6	12.9	136	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	855A03XX4K02	22.8	855A03XX4L02	23.7	855A03XX4M02	28.1	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 Dalí	855A03XX4B02	22.8	855A03XX4E02	23.7	855A03XX4H02	28.1	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	855B03XX4K02	23.1	855B03XX4L02	24.0	855B03XX4M02	28.4	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 Dalí	855B03XX4B02	23.1	855B03XX4E02	24.0	855B03XX4H02	28.4	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	855G03XX4K02	23.4	855G03XX4L02	24.2	855G03XX4M02	28.7	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 Dalí	855G03XX4B02	23.4	855G03XX4E02	24.2	855G03XX4H02	28.7	13.8	98	97	0.95	II
LV 1250Lm 1800-3000K CRI97 Dalí	855E03XX4B02	23.1	855E03XX4E02	24.0	855E03XX4H02	28.4	13.8	91	97	0.95	II
LV-TW 1250Lm 2700-6500K CRI95/86 Dalí	-	-	856A03XX4W02	24.0	856A03XX4Y02	28.4	11.4	110	95/86	0.90	II

LV versions also available with: Triac dim Casambi 1-10V & Push Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.




slightly different




# SensorStrada 75

## DIMENSIONS



## DETECTION AREA



## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP44
IK rate	IK03
Operating temperature (Ta)	-20°C/ +30°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years
Detection range	120°
Turn-on time	200 ms
Inrush current	0 mA (max. 220 pcs. per type B16Amp)
Surge protection	L-N > 1kV, L-E, N-E > 2kV
Audible noise	21dB
Time setting	4 min. (cannot be changed)

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



Using CS springs: Ø 75 mm.  
Thickness ceiling 5-60 mm  
& recess depth 60 mm.



Using WS springs: Ø 77 mm.  
Thickness ceiling 1-55 mm  
& recess depth 60 mm.

IP20

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

IP44



Sensor luminaires turn on for 4 minutes after detecting movement.



bhc bridgelux

## ITEM SPECIFICATIONS See pricelist 2025 page 58

Description	Item code	Extra	Input	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
SensorStrada 75 HV 600 Lm 3000K 80°	852S03XX5D02	Incl. 3P conn.box	220-240V	15.0	40	83	25.9	0.99	I
SensorStrada 75 HV 600 Lm 4000K 80°	852S03XX5F02	Incl. 3P conn.box	220-240V	15.0	40	83	25.9	0.99	I

All values are measured at 230V (+/- 7%).




slightly different



# Strada 90

## DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	5.0	475	500	525	95	100	105
Special request	250	9.8	850	900	1000	87	92	102
Standard	350	13.8	1150	1250	1350	83	91	98



Using CS springs: Ø 90 mm.  
Thickness ceiling 5-70 mm  
& recess depth 70 mm.



Using WS springs: Ø 92 mm.  
Thickness ceiling 1-50 mm  
& recess depth 70 mm.

For soft ceiling tiles we recommend using a wooden plate or a ceiling ring on the reverse side of the tile.



eldoLED   
CASAMBI LUMILEDS KGP

## ITEM SPECIFICATIONS See pricelist 2025 page 19

Description	40°		80°		W per lamp	Lm/W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR					
Strada 90									
HV-FD 800Lm 2700K Triac dim	852B03XX5A02	15.7	852B03XX5B02	26.9	10.5	76	93	0.99	I
HV-FD 800Lm 3000K Triac dim	852B03XX5C02	15.7	852B03XX5D02	26.9	10.3	78	93	0.99	I
HV-FD 800Lm 4000K Triac dim	852B03XX5E02	15.7	852B03XX5F02	26.9	10.1	79	93	0.99	I
HV-FD 800Lm 2200-3000K Triac dim	852B03XX5G02	15.7	852B03XX5H02	26.9	10.3	78	93	0.99	I

Description	24°		60°		80°		W per lamp	Lm/W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	853C03XX4K02	24.1	853C03XX4L02	24.9	853C03XX4M02	29.4	12.9	123	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dali	853C03XX4B02	24.1	853C03XX4E02	24.9	853C03XX4H02	29.4	12.9	123	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	853D03XX4K02	24.2	853D03XX4L02	25.1	853D03XX4M02	29.6	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dali	853D03XX4B02	24.2	853D03XX4E02	25.1	853D03XX4H02	29.6	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	853F03XX4K02	24.3	853F03XX4L02	25.2	853F03XX4M02	29.6	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dali	853F03XX4B02	24.3	853F03XX4E02	25.2	853F03XX4H02	29.6	12.9	136	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	855C03XX4K02	22.8	855C03XX4L02	23.7	855C03XX4M02	28.1	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 Dali	855C03XX4B02	22.8	855C03XX4E02	23.7	855C03XX4H02	28.1	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	855D03XX4K02	23.1	855D03XX4L02	24.0	855D03XX4M02	28.4	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 Dali	855D03XX4B02	23.1	855D03XX4E02	24.0	855D03XX4H02	28.4	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	855H03XX4K02	23.4	855H03XX4L02	24.2	855H03XX4M02	28.7	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 Dali	855H03XX4B02	23.4	855H03XX4E02	24.2	855H03XX4H02	28.7	13.8	98	97	0.95	II
LV 1250Lm 1800-3000K CRI97 Dali	855F03XX4B02	23.1	855F03XX4E02	24.0	855F03XX4H02	28.4	13.8	91	97	0.95	II
LV-TW 1250Lm 2700-8500K CRI95/86 Dali	-	-	856B03XX4W02	24.0	856B03XX4Y02	28.4	11.4	110	95/86	0.90	II

LV versions also available with: Triac dim Casambi 1-10V & Push Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.



slightly different



↔  
ø 108 mm

### BEAM ANGLE



Reflector  
LV: 18° / 37° / 60°



Diffuser  
LV: 80° (On request)


### COLOURS



Matt black  
RAL 9005



Matt white  
RAL 9016



Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/White	XX=76


### SPRINGS



Standard with CSsprings  
(concrete/gyproc). Also  
available as above with  
WS springs (gyproc/  
metal).

# Strada 100

## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp		Lumen Output			Lumen / Watt		
		CRI82	CRI97	CRI82 3000K	CRI82 4000K	CRI97 3000K	CRI82 3000K	CRI82 4000K	CRI97 3000K
Special request	250	9.2	9.4	1350	1400	800	147	152	85
Special request	350	13.1	13.2	1850	1900	1100	141	145	83
Special request	500	19.4	17.9	2525	2600	1450	130	134	81
Standard	700	27.9	27.0	3575	3650	2150	128	131	80
Standard	800	32.4	32.1	3825	4050	2500	118	125	78
Special request	900	36.8	35.5	4300	4500	2700	117	122	76
Special request	1050	43.7	41.7	4900	5100	3000	112	117	72
Standard	1200	51.2	50.5	5550	5800	3250	108	113	64
Special request	1400: x	57.2	x	x	x	3750 <sup>2</sup>	x	x	66

## SPECIFICATIONS

Beam angle (FWHM)	18°/ 37°/ 60° (On request 80°)
Fixture material	Die cast aluminium / Glass
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK09
Operating temperature (Ta)	-20°C/ +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

**IP20** Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

**IP44**

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

Ask our sales department about the possibilities for:

- Tuneable white 2700-6500K
- Extra High CRI LED options (see page 32)

TUNABLE  
WHITE



Using CS springs: Ø 100 mm. Thickness ceiling 5-118mm & recess depth 118mm. For plasterboard ceilings or similar harder materials thicker than 9 mm.



Using WS springs: Ø 100 mm. Thickness 1-55 mm & recess depth 118mm. For soft ceiling tiles. We recommend using a ceiling ring on the reverse side of the tile.



## ITEM SPECIFICATIONS See pricelist 2025 page 51

TCB LUMILEDS ETE bridgelux KGP eldoLED

Description Strada 100	18°		37°		60°		mA	W per lamp	Lm/ W	CRI (typ.)	PF	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR						
LV-HE3575Lm 3000K CRI82 No dim	85N003XXC02	19.4	85N003XXCB02	18.9	85N003XXC02	21.9	700	27.9	128	82	0.95	II
LV-HE 3575Lm 3000K CRI82 1-10V& Push	85N003XXNA02	19.4	85N003XXNB02	18.9	85N003XXNC02	21.9	700	27.9	128	82	0.95	II
LV-HE3575Lm 3000K CRI82 Dali	85N003XXPA02	19.4	85N003XXPB02	18.9	85N003XXPC02	21.9	700	27.9	128	82	0.95	II
LV-HE3650Lm 4000K CRI82 No dim	85N003XXCD02	19.4	85N003XXCE02	18.9	85N003XXCF02	22.0	700	27.9	131	82	0.95	II
LV-HE 3650Lm 4000K CRI82 1-10V& Push	85N003XXND02	19.4	85N003XXNE02	18.9	85N003XXNF02	22.0	700	27.9	131	82	0.95	II
LV-HE3650Lm 4000K CRI82 Dali	85N003XXPD02	19.4	85N003XXPE02	18.9	85N003XXPF02	22.0	700	27.9	131	82	0.95	II
LV 2500Lm 3000K CRI97 No dim	852003XXCH02	18.1	852003XXCH02	17.6	852003XXCJ02	20.6	800	32.1	78	97	0.95	I
LV 2500Lm 3000K CRI97 1-10V& Push	852003XXNG02	18.1	852003XXNH02	17.6	852003XXNJ02	20.6	800	32.1	78	97	0.95	II
LV 2500Lm 3000K CRI97 Dali	852003XXPG02	18.1	852003XXPH02	17.6	852003XXPJ02	20.6	800	32.1	78	97	0.95	II
LV-HE5550Lm 3000K CRI82 No dim	85N003XXCR02	20.9	85N003XXCS02	20.4	85N003XXCT02	23.4	1200	51.2	108	82	0.95	II
LV-HE 5550Lm 3000K CRI82 1-10V& Push	85N003XXNR02	20.9	85N003XXNL02	20.4	85N003XXNQ02	23.4	1200	51.2	108	82	0.95	I
LV-HE5550Lm 3000K CRI82 Dali	85N003XXPK02	20.9	85N003XXPL02	20.4	85N003XXPM02	23.4	1200	51.2	108	82	0.95	I
LV-HE5800Lm 4000K CRI82 No dim	85N003XXCU02	21.1	85N003XXCV02	20.4	85N003XXCW02	23.6	1200	51.2	113	82	0.95	II
LV-HE 5800Lm 4000K CRI82 1-10V& Push	85N003XXNU02	21.1	85N003XXNV02	20.4	85N003XXNQ02	23.6	1200	51.2	113	82	0.95	I
LV-HE5800Lm 4000K CRI82 Dali	85N003XXPN02	21.1	85N003XXPP02	20.4	85N003XXPP02	23.6	1200	51.2	113	82	0.95	I
LV 3250Lm 3000K CRI97 No dim	852003XXFD02	19.0	852003XXFE02	18.5	852003XXFF02	21.6	1200	50.5	64	97	0.95	II
LV 3750Lm 3000K CRI97 1-10V& Push	852003XXNR02	19.5	852003XXNS02	19.0	852003XXNT02	22.1	1400	57.2	66	97	0.95	I
LV 3750Lm 3000K CRI97 Dali	852003XXPR02	19.5	852003XXPS02	19.0	852003XXPT02	22.1	1400	57.2	66	97	0.95	I

All values are measured at 230V (+/- 7%).



slightly different



ø 170 mm

### BEAM ANGLE



Reflector  
LV: 45° / 65°



Diffuser  
LV: 80° (On request)


### COLOURS



Matt black  
RAL 9005



Matt white  
RAL 9016



Housing/  
Reflector ring

Item  
code

Housing/  
Reflector ring

Item  
code

White/Gold

XX=61

Black/Gold

XX=71

White/Silver

XX=63

Black/Silver

XX=74

White/Black

XX=62

Black/Black

XX=72

White/White

XX=65

Black/White

XX=76


### SPRINGS



Standard with CSsprings  
(concrete/gyproc). Also  
available as above with  
WS springs (gyproc/  
metal).

# Strada 150

## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp		Lumen Output			Lumen / Watt		
		CR182	CR197	CR182 3000K	CR182 4000K	CR197 3000K	CR182 3000K	CR182 4000K	CR197 3000K
Special request	250	9.2	9.4	1350	1400	800	147	152	85
Special request	350	13.1	13.2	1850	1900	1100	141	145	83
Special request	500	19.4	17.9	2525	2600	1450	130	134	81
Standard	700	27.9	27.0	3575	3650	2150	128	131	80
Standard	800	32.4	32.1	3825	4050	2500	118	125	78
Special request	900	36.8	35.5	4300	4500	2700	117	122	76
Special request	1050	43.7	41.7	4900	5100	3000	112	117	72
Standard	1200	51.2	50.5	5550	5800	3250	108	113	64
Special request	1400	x	57.2	x	x	3750 <sup>2</sup>	x	x	66

<sup>1</sup> For large downlights CR197 No dim. <sup>2</sup> For large downlights CR971-10Vand Dali.

## SPECIFICATIONS

Beam angle (FWHM)	45° / 65° (On request 80°)
Fixture material	Die cast aluminium / Glass
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK09
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

Ask our sales department about the possibilities for:

- Tuneable white 2700-6500K.
- Extra High CRI LED options (see page 32)



Using CS springs. Ø 160 mm.  
Thickness ceiling 5-138 mm & recess depth 138 mm. For plasterboard ceilings or similar harder materials.



Using WS springs: Ø 150-165 mm.  
Thickness ceiling 1-35 mm & recess depth 138 mm. For soft ceiling tiles. We recommend using a ceiling ring on the reverse side of the tile.



**IP20** Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

**IP44**

## ITEM SPECIFICATIONS See pricelist 2025 page 52


ICIE LUMILEDS TTE bridgelux KGP eldoLED

Description Strada 150	45°		65°		mA	W per lamp	Lm / W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR						
LV-HE3575Lm 3000K CR182No dim	85N503XXJA02	16.9	85N503XXJB02	19.8	700	27.9	128	82	0.95	II
LV-HE 3575Lm 3000K CR182 1-10V& Push	85N503XXN202	16.9	85N503XXN302	19.8	700	27.9	128	82	0.95	II
LV-HE3575Lm 3000K CR182Dali	85N503XXP202	16.9	85N503XXP302	19.8	700	27.9	128	82	0.95	II
LV-HE3650Lm 4000K CR182No dim	85N503XXJC02	17.0	85N503XXJD02	19.9	700	27.9	131	82	0.95	II
LV-HE 3650Lm 4000K CR182 1-10V& Push	85N503XXN402	17.0	85N503XXN502	19.9	700	27.9	131	82	0.95	II
LV-HE3650Lm 4000K CR182Dali	85N503XXP402	17.0	85N503XXP502	19.9	700	27.9	131	82	0.95	II
LV 2500Lm 3000K CR197No dim	850503XXCX02	15.7	850503XXCY02	18.5	800	32.1	78	97	0.95	I
LV 2500Lm 3000K CR197 1-10V& Push	850503XXN002	15.7	850503XXN102	18.5	800	32.1	78	97	0.95	II
LV 2500Lm 3000K CR197Dali	850503XXP002	15.7	850503XXP102	18.5	800	32.1	78	97	0.95	II
LV-HE5550Lm 3000K CR182No dim	85N503XXCK02	18.4	85N503XXCL02	21.3	1200	51.2	99	82	0.95	II
LV-HE 5550Lm 3000K CR182 1-10V& Push	85N503XXNU02	18.4	85N503XXNV02	21.3	1200	51.2	99	82	0.95	I
LV-HE5550Lm 3000K CR182 Dali	85N503XXPU02	18.4	85N503XXPV02	21.3	1200	51.2	99	82	0.95	I
LV-HE5800Lm 4000K CR182No dim	85N503XXCM02	18.6	85N503XXCN02	21.5	1200	51.2	113	82	0.95	II
LV-HE 5800Lm 4000K CR182 1-10V& Push	85N503XXNW02	18.6	85N503XXNX02	21.5	1200	51.2	113	82	0.95	I
LV-HE5800Lm 4000K CR182Dali	85N503XXPW02	18.6	85N503XXPX02	21.5	1200	51.2	113	82	0.95	I
LV 3250Lm 3000K CR197No dim	850503XXCP02	16.6	850503XXCQ02	19.4	1200	50.5	64	97	0.95	II
LV 3750Lm 3000K CR197 1-10V& Push	850503XXNY02	17.1	850503XXNZ02	19.9	1400	57.2	66	97	0.95	I
LV 3750Lm 3000K CR197Dali	850503XXPY02	17.1	850503XXPZ02	19.9	1400	57.2	66	97	0.95	I

All values are measured at 230V (+/- 7%).




slightly different

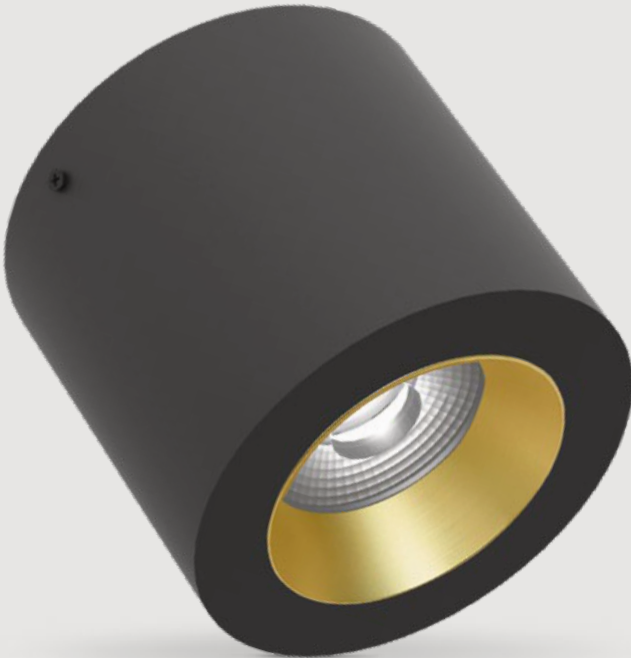

↔  
ø 103 mm

**BEAM ANGLE**



Lens  
HV-FD: 40°



Diffuser  
HV-FD: 80°


**COLOURS**



Matt black  
RAL 9005




Matt white  
RAL 9016




Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/ White	XX=76

# Vector CL 100

## DIMENSIONS



## FIXATION DIMENSIONS

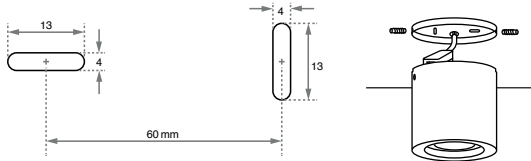

## SPECIFICATIONS

Beam angle (FWHM)	40° / 80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

IP20



bhc bridgelux


## ITEM SPECIFICATIONS [See pricelist 2025 page 60](#)

Description	40°		80°		W per lamp	Lm / W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR					
Vector CL100HV-FD 800Lm 2700K Triac dim	7B2A03XX5A02	15.7	7B2A03XX5B02	26.9	10.5	76	93	0.99	II
Vector CL100HV-FD 800Lm 3000K Triac dim	7B2A03XX5C02	15.7	7B2A03XX5D02	26.9	10.3	78	93	0.99	II
Vector CL100HV-FD 800Lm 4000K Triac dim	7B2A03XX5E02	15.7	7B2A03XX5F02	26.9	10.1	79	93	0.99	II
Vector CL100HV-FD 800Lm 2200-3000K Triac dim	7B2A03XX5G02	15.7	7B2A03XX5H02	26.9	10.3	78	93	0.99	II

All values are measured at 230V (+/- 7%).



slightly different

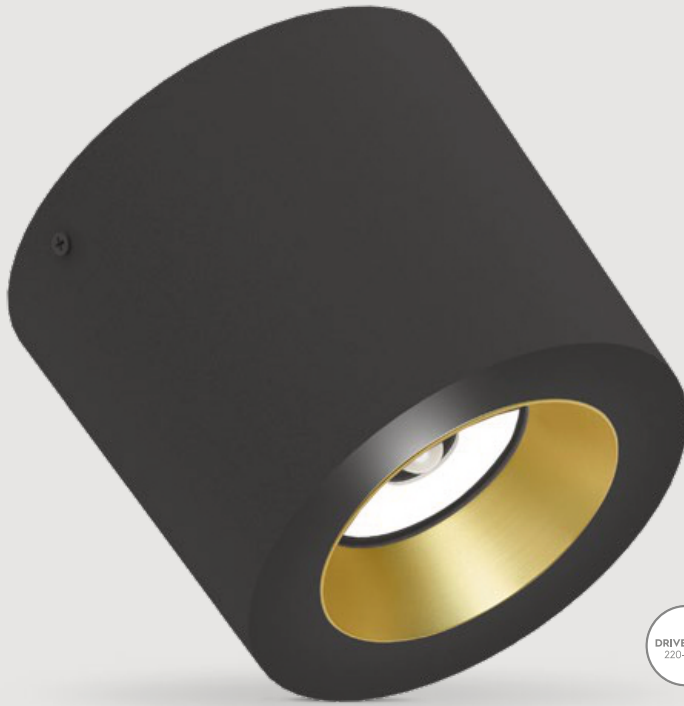

DRIVERLESS  
220-240V

↔  
ø 103 mm

COLOURS



Matt black  
RAL 9005




Matt white  
RAL 9016




Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/White	XX=76

# SensorVector CL 100


## DIMENSIONS



## FIXATION DIMENSIONS



## DETECTION AREA



## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C/ +30°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years
Detection range	120°
Turn-on time	200 ms
Inrush current	0 mA (max. 220 pcs. per type B16Amp)
Surge protection	L-N > 1Kv; L-E, N-E > 2Kv
Audible noise	21dB
Time setting	4 min. (cannot be changed)

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



Sensor luminaires turn on for 4 minutes after detecting movement.



## ITEM SPECIFICATIONS [See pricelist, 2025 page 59](#)


Description	Item code	Input	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
SensorVector CL 100 HV 600 Lm 3000K 80°	7B2S03XX5D02	220-240V	15.0	40	83	25.9	0.99	II
SensorVector CL 100 HV 600 Lm 4000K 80°	7B2S03XX5F02	220-240V	15.0	40	83	25.9	0.99	II

All values are measured at 230V (+/- 7%).






NO SCREWS  
VISIBLE




ø 145 mm

**BEAM ANGLE**




Reflector  
LV: 18° / 37° / 60°




Diffuser  
LV: 80°


**COLOURS**



Matt black  
RAL 9005




Matt white  
RAL 9016






Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/White	XX=76

# Vector CL 145

## DIMENSIONS



## FIXATION DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	18° / 37° / 60° / 80°
Fixture material	Die cast aluminium / Glass
Environment	Indoor
IP rate	IP20
IK rate	IK09
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Safety class	II
Warranty	7 years

This luminaire contains built-in LED lamps.  
There are no exchangeable parts inside the luminaire.  
EU 874/2012

## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 special request	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136
Special request	450	17.8	2075	2150	2175	116	120	122
Standard	500	19.7	2250	2325	2350	114	118	120

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	250	9.8	850	900	1000	87	92	102
Special request	350	13.8	1150	1250	1350	83	91	98
Special request	450	18.0	1475	1600	1750	82	89	97
Standard	500	20.1	1625	1800	1925	81	89	96



## ITEM SPECIFICATIONS See pricelist 2025 page 61


Description	18°		37°		60°		80°		W per lamp	Lm / W	CRI (typ.)	Pf
	Item code	UGR	Item code	UGR	Item code	UGR	Item code	UGR				
LV-HE2250Lm 2700K CRI82No dim	7DN903XXDF02	12.7	7DN903XXDS02	12.6	7DN903XXDT02	15.8	7DN903XXV902	22.5	19.7	114	82	0.95
LV-HE 2250Lm 2700K CRI82 1-10V& Push	7DN903XXSV02	12.7	7DN903XXSW02	12.6	7DN903XXSO02	15.8	7DN903XXZA02	22.5	19.7	114	82	0.95
LV-HE2250Lm 2700K CRI82Dali	7DN903XXSY02	12.7	7DN903XXSZ02	12.6	7DN903XXSO02	15.8	7DN903XXZB02	22.5	19.7	114	82	0.95
LV-HE2325Lm 3000K CRI82No dim	7DN903XXCA02	12.8	7DN903XXCB02	12.7	7DN903XXCC02	15.9	7DN903XXVY02	22.6	19.7	118	82	0.95
LV-HE 2325Lm 3000K CRI82 1-10V& Push	7DN903XXNA02	12.8	7DN903XXNB02	12.7	7DN903XXNC02	15.9	7DN903XXVH02	22.6	19.7	118	82	0.95
LV-HE2325Lm 3000K CRI82Dali	7DN903XXPA02	12.8	7DN903XXPB02	12.7	7DN903XXPC02	15.9	7DN903XXVY02	22.6	19.7	118	82	0.95
LV-HE2350Lm 4000K CRI82No dim	7DN903XXCD02	12.8	7DN903XXCE02	12.7	7DN903XXCF02	15.9	7DN903XXVY02	22.7	19.7	120	82	0.95
LV-HE 2350Lm 4000K CRI82 1-10V& Push	7DN903XXND02	12.8	7DN903XXNE02	12.7	7DN903XXNF02	15.9	7DN903XXVU02	22.7	19.7	120	82	0.95
LV-HE2350Lm 4000K CRI82Dali	7DN903XXPD02	12.8	7DN903XXPE02	12.7	7DN903XXPF02	15.9	7DN903XXVW02	22.7	19.7	120	82	0.95
LV 1625Lm2700K CRI97 No dim	7D1B03XXBJ02	11.5	7D1B03XXBM02	11.5	7D1B03 XXBE02	14.6	7D1B03XXOE02	21.4	20.1	81	97	0.95
LV 1625Lm2700K CRI97 1-10V& Push	7D1B03XXDJ02	11.5	7D1B03XXDM02	11.5	7D1B03XXDE02	14.6	7D1B03XXOL02	21.4	20.1	81	97	0.95
LV 1625Lm2700K CRI97 Dali	7D1B03XXIL02	11.5	7D1B03XXIP02	11.5	7D1B03XXIS02	14.6	7D1B03XXOP02	21.4	20.1	81	97	0.95
LV 1800Lm3000K CRI97 No dim	7D1B03XXBK02	11.9	7D1B03XXBN02	11.8	7D1B03XXBR02	15.8	7D1B03XXOF02	21.7	20.1	89	97	0.95
LV 1800Lm3000K CRI97 1-10V& Push	7D1B03XXD202	11.9	7D1B03XXD502	11.8	7D1B03XXDB02	15.8	7D1B03XXOM02	21.7	20.1	89	97	0.95
LV 1800Lm3000K CRI97 Dali	7D1B03XX1M02	11.9	7D1B03XX1Q02	11.8	7D1B03XX1T02	15.8	7D1B03XXOQ02	21.7	20.1	89	97	0.95
LV 1925Lm4000K CRI97 No dim	7D1B03XXBL02	12.1	7D1B03XXBP02	12.0	7D1B03XXBS02	15.2	7D1B03XXOG02	22.0	20.1	96	97	0.95
LV 1925Lm4000K CRI97 1-10V& Push	7D1B03XXD302	12.1	7D1B03XXD602	12.0	7D1B03XXD902	15.2	7D1B03XXON02	22.0	20.1	96	97	0.95
LV 1925Lm4000K CRI97 Dali	7D1B03XX1N02	12.1	7D1B03XX1R02	12.0	7D1B03XX1U02	15.2	7D1B03XXOR02	22.0	20.1	96	97	0.95

All values are measured at 230V (+/- 7%).



slightly different





  
 ø 230 mm

## COLOURS



Matt black  
RAL 9005

Matt white  
RAL 9016




Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/ White	XX=76

## SPRINGS

Other springs only  
available through our  
MIYO department.

# Strada 185

## DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK03
Operating temperature (Ta)	-20°C/ +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years



eldLED KGP

## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp			Lumen Output			Lumen / Watt		
		CRI82	CRI97		CRI82	CRI82	CRI97	CRI82	CRI82	CRI97
Special request	250	9.2	9.4	1350	1400	800	147	152	85	
Special request	350	13.1	13.2	1850	1900	1100	141	145	83	
Special request	500	19.4	17.9	2525	2600	1450	130	134	81	
Standard	700	27.9	27.0	3575	3650	2150	128	131	80	
Standard	800	32.4	32.1	3825	4050	2500	118	125	78	
Special request	900	36.8	35.5	4300	4500	2700	117	122	76	
Special request	1050	43.7	41.7	4900	5100	3000	112	117	72	
Standard	1200	51.2	50.5	5550	5800	3250 <sup>1</sup>	108	113	64	
Special request	1400	x	57.2	x	x	3750 <sup>2</sup>	x	x	66	

<sup>1</sup> For large downlights CRI97 No dim. <sup>2</sup> For large downlights CR971-10Vand Dali.

This luminaire contains built-in LED lamps.  
There are no exchangeable parts inside the luminaire.  
EU 874/2012



Using CS springs. Thickness ceiling 5-85 mm & recess depth 85 mm.  
185mm: For soft ceiling tiles. We recommend using a wooden plate or a ceiling ring on the reverse side of the tile.  
185-205mm: For plasterboard ceilings or similar harder materials.

IP20  
IP44

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.




## ITEM SPECIFICATIONS See pricelist 2025 page 53

Description	Item code	UGR	mA	W per lamp	Lm / W	CRI (typ.)	Pf	Safety class
Strada 185								
LV-HE3575Lm 3000K CRI82 No dim	85N103XXYR02	25.4	700	27.9	128	82	0.95	II
LV-HE 3575Lm 3000K CRI82 1-10V& Push	85N103XXYH02	25.4	700	27.9	128	82	0.95	II
LV-HE3575Lm 3000K CRI82 Dali	85N103XXYM02	25.4	700	27.9	128	82	0.95	II
LV-HE3650Lm 4000K CRI82 No dim	85N103XXYY02	25.5	700	27.9	131	82	0.95	II
LV-HE 3650Lm 4000K CRI82 1-10V& Push	85N103XXYU02	25.5	700	27.9	131	82	0.95	II
LV-HE3650Lm 4000K CRI82 Dali	85N103XXYW02	25.5	700	27.9	131	82	0.95	II
LV 2500Lm 3000K CRI97 No dim	851C03XXYQ02	24.2	800	32.1	78	97	0.95	I
LV 2500Lm 3000K CRI97 1-10V& Push	851C03XXYG02	24.2	800	32.1	78	97	0.95	II
LV 2500Lm 3000K CRI97 Dali	851C03XXYL02	24.2	800	32.1	78	97	0.95	II
LV-HE5550Lm 3000K CRI82 No dim	85N103XXYT02	27.0	1200	51.2	108	82	0.95	II
LV-HE 5550Lm 3000K CRI82 1-10V& Push	85N103XXYK02	27.0	1200	51.2	108	82	0.95	I
LV-HE5550Lm 3000K CRI82 Dali	85N103XXYP02	27.0	1200	51.2	108	82	0.95	I
LV-HE5800Lm 4000K CRI82 No dim	85N103XXYZ02	27.1	1200	51.2	113	82	0.95	II
LV-HE 5800Lm 4000K CRI82 1-10V& Push	85N103XXYV02	27.1	1200	51.2	113	82	0.95	I
LV-HE5800Lm 4000K CRI82 Dali	85N103XXYX02	27.1	1200	51.2	113	82	0.95	I
LV 3250Lm 3000K CRI97 No dim	851C03XXYS02	25.1	1200	50.5	64	97	0.95	II
LV 3750Lm 3000K CRI97 1-10V& Push	851C03XXYJ02	25.6	1400	57.2	66	97	0.95	I
LV 3750Lm 3000K CRI97 Dali	851C03XXYN02	25.6	1400	57.2	66	97	0.95	I

All values are measured at 230V (+/- 7%).



slightly different

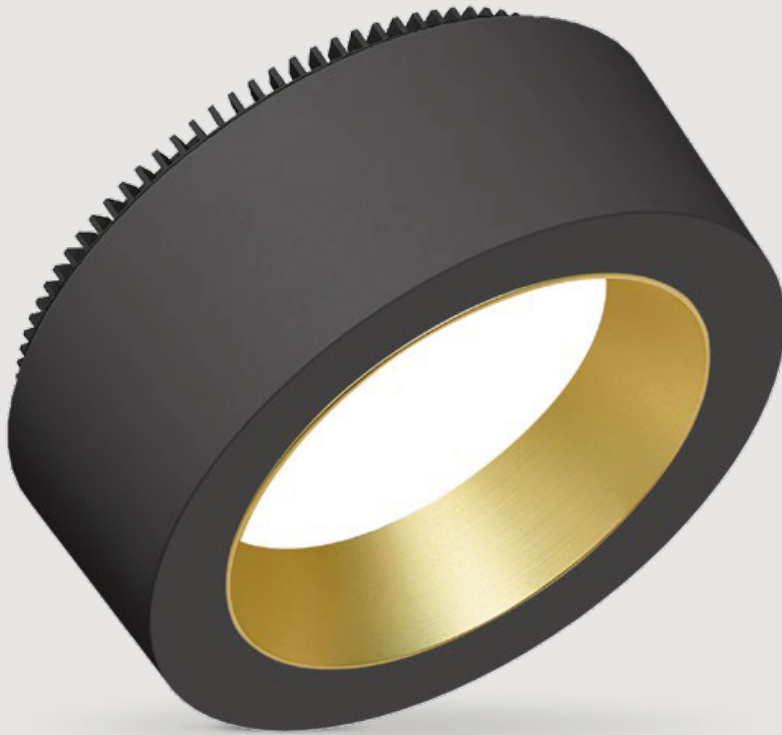

ø 235 mm


COLOURS



Matt black  
RAL 9005




Matt white  
RAL 9016

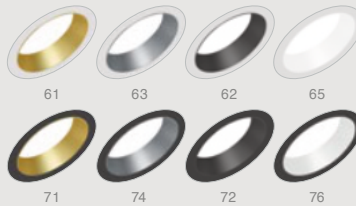

Housing/ Reflector ring	Item code	Housing/ Reflector ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Silver	XX=63	Black/Silver	XX=74
White/Black	XX=62	Black/Black	XX=72
White/White	XX=65	Black/White	XX=76

# Vector CL235


## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp		Lumen Output			Lumen / Watt		
		CRI82	CRI97	CRI82	CRI82	CRI97	CRI82	CRI82	CRI97
Special request	250	9.2	9.4	1350	1400	800	147	152	85
Special request	350	13.1	13.2	1850	1900	1100	141	145	83
Standard	500	19.4	17.9	2525	2600	1450	130	134	81

## FIXATION DIMENSIONS

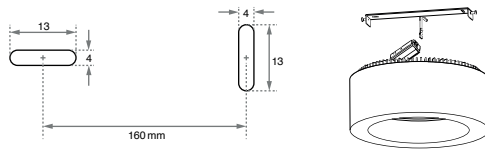

## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



## ITEM SPECIFICATIONS See pricelist 2025 page 62

Description	Item code	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Vector CL 235 LV 2525Lm 3000K CRI82 No dim	7DN103XXY002	19.4	130	82	24.2	0.95	II
Vector CL 235 LV 2525Lm 3000K CRI82 1-10V& Push	7DN103XXY102	19.4	130	82	24.2	0.95	II
Vector CL 235 LV 2525Lm 3000K CRI82 Dali	7DN103XXY202	19.4	130	82	24.2	0.95	II
Vector CL 235 LV 2600Lm 4000K CRI82 No dim	7DN103XXY302	19.4	134	82	24.3	0.95	II
Vector CL 235 LV 2600Lm 4000K CRI82 1-10V& Push	7DN103XXY402	19.4	134	82	24.3	0.95	II
Vector CL 235 LV 2600Lm 4000K CRI82 Dali	7DN103XXY502	19.4	134	82	24.3	0.95	II
Vector CL 235 LV 1450Lm 3000K CRI97 No dim	7D1C03XXY602	17.9	81	97	22.3	0.95	II
Vector CL 235 LV 1450Lm 3000K CRI97 1-10V& Push	7D1C03XXY702	17.9	81	97	22.3	0.95	II
Vector CL 235 LV 1450Lm 3000K CRI97 Dali	7D1C03XXY802	17.9	81	97	22.3	0.95	II


All values are measured at 230V (+/- 7%).





**S**light<sup>®</sup>  
slightly different





#### COLOURS



Matt white  
RAL 9016 (XX=MW)



Matt black  
RAL 9005 (XX=BL)


#### SPRINGS



Standard with CSsprings (concrete/gyproc).  
Also available as above with  
WS springs (gyproc/metal).


# Fluxe 35 (Gen2)

## DIMENSIONS




- \* This distance is necessary because of the height of the connection box (80 mm). For purely heat reasons just 5 mm is sufficient.
- \*\* For WSprings this dimension is 60 mm

Incl. PSU No dim (100-240V)



Incl. conn. box (500mA)\*

For installation to a central power supply.



## SPECIFICATIONS

Beam angle (FWHM)	40° (65° FWTM)
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

\*See page 174 for more information about power supplies.



Using CS springs: Ø 35 mm.  
Thickness ceiling 5-80 mm  
& recess depth 80 mm.



Using WS springs: Ø 36 mm.  
Thickness ceiling 1-50 mm  
& recess depth 80 mm.

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.



## ITEM SPECIFICATIONS See pricelist 2025 page 6

Description	Item code	Input	Vf	W per lamp	Lm/W	CFI (typ.)	UGR	Pf	Safety class
Fluxe 35 LV 475Lm 2700K No dim	921903XX0102	100-240V	x	6.6	72	82	150	0.8	II
Fluxe 35 LV 500Lm 3000K No dim	921903XX7202	100-240V	x	6.6	76	82	152	0.8	II
Fluxe 35 LV 525Lm 4000K No dim	921903XX0202	100-240V	x	6.6	80	82	154	0.8	II
Fluxe 35 LVC 500mA 475Lm 2700K Dim	921903XX01E2	500mA	119	5.7	83	82	150	x	III
Fluxe 35 LVC 500mA 500Lm 3000K Dim	921903XX72E2	500mA	119	5.7	88	82	152	x	III
Fluxe 35 LVC 500mA 525Lm 4000K Dim	921903XX02E2	500mA	119	5.7	92	82	154	x	III


All values are measured at 230V (+/- 7%).





# Fluxe 50 (Gen2)

## DIMENSIONS




Incl. PSU (220-240V)

PSUTCI 127042Triac dim 102x38x21mm  
PSUTCI 127576Dali 147x44x22 mm



Incl. conn.box (500mA)\*

For installation to a central power supply.



## SPECIFICATIONS

Beam angle (FWHM)	40° (65° FWTM)
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.  
EU 874/2012

\*See page 174 for more information about power supplies.



Using CSsprings: Ø 50 mm.  
Thickness ceiling 5-50 mm  
& recess depth 50 mm.



Using WSsprings: Ø 50 mm.  
Thickness ceiling 1-20 mm  
& recess depth 50 mm.




## ITEM SPECIFICATIONS See pricelist 2025 page 5

Description	Item code	Input	Vf	W per lamp	Lm/W	CRI (typ.)	UGR	PI	Safety class
Fluxe 50 adj LV 475Lm 2700K Triac dim	861A03XX0102	220-240V	x	6.6	72	82	150	0.96	II
Fluxe 50 adj LV 500Lm 3000K Triac dim	861A03XX7202	220-240V	x	6.6	76	82	152	0.96	II
Fluxe 50 adj LV 525Lm 4000K Triac dim	861A03XX0202	220-240V	x	6.6	80	82	154	0.96	II
Fluxe 50 adj LV 475Lm 2700K Dali	861A03XXS402	220-240V	x	6.6	72	82	150	0.95	II
Fluxe 50 adj LV 500Lm 3000K Dali	861A03XXS502	220-240V	x	6.6	76	82	152	0.95	II
Fluxe 50 adj LV 525Lm 4000K Dali	861A03XXS602	220-240V	x	6.6	80	82	154	0.95	II
Fluxe 50 adj LVC 500mA 475Lm 2700K Dim	861A03XX01E2	350mA	119	5.7	83	82	150	x	III
Fluxe 50 adj LVC 500mA 500Lm 3000K Dim	861A03XX72E2	350mA	119	5.7	88	82	152	x	III
Fluxe 50 adj LVC 500mA 525Lm 4000K Dim	861A03XX02E2	350mA	119	5.7	92	82	154	x	III

All values are measured at 230V (+/- 7%).





ø 90 mm

#### BEAM ANGLE



Reflector  
LV: 24° / 60°  
LV-TW: 60°



Lens  
HV-FD: 40°



Diffuser  
HV-FD: 80°  
LV: 80°  
LV-TW 80°

#### COLOURS



Matt white  
RAL 9016 (XX=MM)



Matt black  
RAL 9005 (XX=BL)


#### SPRINGS



Standard with CS springs (concrete/gyproc).  
Also available as above with  
WS springs (gyproc/metal).

# Fluxe 75

## DIMENSIONS



## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136

## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP65 <sup>1</sup>
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years



Using CS springs: Ø 75 mm.  
Thickness ceiling 5-60 mm  
& recess depth 60 mm.



Using WS springs: Ø 77 mm.  
Thickness ceiling 1-55 mm  
& recess depth 60 mm.

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

IP20	MADE IN HOLLAND	7 YEAR WARRANTY	ECO	<sup>1</sup> Not for HV-FD 40° version.
IP65				

This luminaire contains built-in LED lamps.  
There are no exchangeable parts inside the luminaire.  
EU 8742012



## ITEM SPECIFICATIONS See pricelist 2025 page 22

Description Fluxe 75	40°		80°		W per lamp	Lm/W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR					
HV-FD 800Lm 2700K Triac dim	802A03XX5A02	15.7	802A03XX5B02	26.9	10.5	76	93	0.99	I
HV-FD 800Lm 3000K Triac dim	802A03XX5C02	15.7	802A03XX5D02	26.9	10.3	78	93	0.99	I
HV-FD 800Lm 4000K Triac dim	802A03XX5E02	15.7	802A03XX5F02	26.9	10.1	79	93	0.99	I
HV-FD 800Lm 2200-3000K Triac dim	802A03XX5G02	15.7	802A03XX5H02	26.9	10.3	78	93	0.99	I

Description Fluxe 75	24°		60°		80°		W per lamp	Lm/W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	803A03XX4K02	24.1	803A03XX4L02	24.9	803A03XX4M02	29.4	12.9	123	82	0.93	II
LV-HE 1650Lm 2700K CRI82 DALI	803A03XX4B02	24.1	803A03XX4E02	24.9	803A03XX4H02	29.4	12.9	123	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	803B03XX4K02	24.2	803B03XX4L02	25.1	803B03XX4M02	29.6	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 DALI	803B03XX4B02	24.2	803B03XX4E02	25.1	803B03XX4H02	29.6	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	803E03XX4K02	24.3	803E03XX4L02	25.2	803E03XX4M02	29.6	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 DALI	803E03XX4B02	24.3	803E03XX4E02	25.2	803E03XX4H02	29.6	12.9	136	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	805A03XX4K02	22.8	805A03XX4L02	23.7	805A03XX4M02	28.1	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 DALI	805A03XX4B02	22.8	805A03XX4E02	23.7	805A03XX4H02	28.1	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	805B03XX4K02	23.1	805B03XX4L02	24.0	805B03XX4M02	28.4	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 DALI	805B03XX4B02	23.1	805B03XX4E02	24.0	805B03XX4H02	28.4	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	805G03XX4K02	23.4	805G03XX4L02	24.2	805G03XX4M02	28.7	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 DALI	805G03XX4B02	23.4	805G03XX4E02	24.2	805G03XX4H02	28.7	13.8	98	97	0.95	II
LV 1250Lm 1800-3000K CRI97 DALI	805E03XX4B02	23.1	805E03XX4E02	24.0	805E03XX4H02	28.4	13.8	91	97	0.95	II
LV-TW 1250Lm 2700-6500K CRI95/86 DALI	-	-	806A03XX4W02	24.0	806A03XX4Y02	28.4	11.4	110	95/86	0.90	II

LV versions also available with: Triac dim Casambi 1-10V & Push Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.




slightly different

115



# Fluxe 90

## DIMENSIONS



## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	5.0	475	500	525	95	100	105
Special request	250	9.8	850	900	1000	87	92	102
Standard	350	13.8	1150	1250	1350	83	91	98

## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years



Using CS springs. Ø 90 mm.  
Thickness ceiling 5-70 mm  
& recess depth 70 mm.



Using WS springs. Ø 92 mm.  
Thickness ceiling 1-50 mm  
& recess depth 70 mm.

For soft ceiling tiles we recommend using a wooden plate or a ceiling ring on the reverse side of the tile.



This luminaire contains built-in LED lamps.  
There are no exchangeable parts inside the luminaire.  
EU 874/2012



## ITEM SPECIFICATIONS See pricelist 2025 page 25

Description Fluxe 90	40°		80°		W per lamp	Lm/W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR					
HV-FD 800Lm 2700K Triac dim	802B03XX5A02	15.7	802B03XX5B02	26.9	10.5	76	93	0.99	I
HV-FD 800Lm 3000K Triac dim	802B03XX5C02	15.7	802B03XX5D02	26.9	10.3	78	93	0.99	I
HV-FD 800Lm 4000K Triac dim	802B03XX5E02	15.7	802B03XX5F02	26.9	10.1	79	93	0.99	I
HV-FD 800Lm 2200-3000K Triac dim	802B03XX5G02	15.7	802B03XX5H02	26.9	10.3	78	93	0.99	I

Description Fluxe 90	24°		60°		80°		W per lamp	Lm/W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	803C03XX4K02	24.1	803C03XX4L02	24.9	803C03XX4M02	29.4	12.9	128	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dali	803C03XX4B02	24.1	803C03XX4E02	24.9	803C03XX4H02	29.4	12.9	128	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	803D03XX4K02	24.2	803D03XX4L02	25.1	803D03XX4M02	29.6	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dali	803D03XX4B02	24.2	803D03XX4E02	25.1	803D03XX4H02	29.6	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	803F03XX4K02	24.3	803F03XX4L02	25.2	803F03XX4M02	29.6	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dali	803F03XX4B02	24.3	803F03XX4E02	25.2	803F03XX4H02	29.6	12.9	136	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	805C03XX4K02	22.8	805C03XX4L02	23.7	805C03XX4M02	28.1	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 Dali	805C03XX4B02	22.8	805C03XX4E02	23.7	805C03XX4H02	28.1	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	805D03XX4K02	23.1	805D03XX4L02	24.0	805D03XX4M02	28.4	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 Dali	805D03XX4B02	23.1	805D03XX4E02	24.0	805D03XX4H02	28.4	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	805H03XX4K02	23.4	805H03XX4L02	24.2	805H03XX4M02	28.7	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 Dali	805H03XX4B02	23.4	805H03XX4E02	24.2	805H03XX4H02	28.7	13.8	98	97	0.95	II
LV 1250Lm 1800-3000K CRI97 Dali	805F03XX4B02	23.1	805F03XX4E02	24.0	805F03XX4H02	28.4	13.8	91	97	0.95	II
LV-TW 1250Lm 2700-6500K CRI95/86 Dali	-	-	806B03XX4W02	24.0	806B03XX4Y02	28.4	11.4	110	95/86	0.90	II

LV versions also available with: Triac dim · Casambi · 1-10V & Push · Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.



slightly different



ø 103 mm

#### BEAM ANGLE



Lens  
HV-FD: 40°



Diffuser  
HV-FD: 80°

#### COLOURS




Matt white  
RAL 9016 (XX=MW)




Matt black  
RAL 9005 (XX=BL)

# Cylinder CL 100

## DIMENSIONS



## FIXATION DIMENSIONS

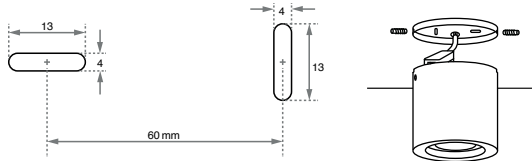

## SPECIFICATIONS

Beam angle (FWHM)	40° / 80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.  
There are no exchangeable parts inside the luminaire.  
EU 874/2012

IP20



bhc bridgelux

## ITEM SPECIFICATIONS See pricelist 2025 page 60

Description	40°		80°		W per lamp	Lm/ W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR					
Cylinder CL 100HV-FD 800Lm 2700K Triac dim	752A03XX5A02	15.7	752A03XX5B02	26.9	10.5	76	93	0.99	II
Cylinder CL 100HV-FD 800Lm 3000K Triac dim	752A03XX5C02	15.7	752A03XX5D02	26.9	10.3	78	93	0.99	II
Cylinder CL 100HV-FD 800Lm 4000K Triac dim	752A03XX5E02	15.7	752A03XX5F02	26.9	10.1	79	93	0.99	II
Cylinder CL 100HV-FD 800Lm 2200-3000K Triac dim	752A03XX5G02	15.7	752A03XX5H02	26.9	10.3	78	93	0.99	II


All values are measured at 230V (+/- 7%).





# Fluxe 185

## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp			Lumen Output			Lumen / Watt		
		CR182	CR197		3000K	4000K	3000K	3000K	4000K	3000K
Special request	250	9.2	9.4	1350	1400	800	147	152	85	
Special request	350	13.1	13.2	1850	1900	1100	141	145	83	
Special request	500	19.4	17.9	2525	2600	1450	130	134	81	
Standard	700	27.9	27.0	3575	3650	2150	128	131	80	
Standard	800	32.4	32.1	3825	4050	2500	118	125	78	
Special request	900	36.8	35.5	4900	4500	2700	117	122	76	
Special request	1050	43.7	41.7	4900	5100	3000	112	117	72	
Standard	1200	51.2	50.5	5550	5800	3250 <sup>1</sup>	108	113	64	
Special request	1400	x	57.2	x	x	3750 <sup>2</sup>	x	x	66	

<sup>1</sup> For large downlights CR197 No dim. <sup>2</sup> For large downlights CR971-10Vand Dali.

## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



Using CS springs. Thickness ceiling 5-85 mm & recess depth 85 mm.

185mm: For soft ceiling tiles. We recommend using a wooden plate or a ceiling ring on the reverse side of the tile.

185-205mm: For plasterboard ceilings or similar harder materials.

IP20

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

IP44



eldoLED KGP

## ITEM SPECIFICATIONS See pricelist 2025 page 53

Description	Item code	UGR	mA	W per lamp	Lm/ W	CRl (typ.)	Pf	Safety class
LV-HE3575Lm 3000K CR182No dim	82N103XXYR02	25.4	700	27.9	128	82	0.95	II
LV-HE 3575Lm 3000K CR182 1-10V& Push	82N103XXYH02	25.4	700	27.9	128	82	0.95	II
LV-HE3575Lm 3000K CR182Dali	82N103XXYM02	25.4	700	27.9	128	82	0.95	II
LV-HE3650Lm 4000K CR182No dim	82N103XXYY02	25.5	700	27.9	131	82	0.95	II
LV-HE 3650Lm 4000K CR182 1-10V& Push	82N103XXYU02	25.5	700	27.9	131	82	0.95	II
LV-HE3650Lm 4000K CR182Dali	82N103XXYW02	25.5	700	27.9	131	82	0.95	II
LV 2500Lm 3000K CR197No dim	821C03XXYQ02	24.2	800	32.1	78	97	0.95	I
LV 2500Lm 3000K CR197 1-10V& Push	821C03XXYG02	24.2	800	32.1	78	97	0.95	II
LV 2500Lm 3000K CR197Dali	821C03XXYL02	24.2	800	32.1	78	97	0.95	II
LV-HE5550Lm 3000K CR182No dim	82N103XXYT02	27.0	1200	51.2	108	82	0.95	II
LV-HE 5550Lm 3000K CR182 1-10V& Push	82N103XXYK02	27.0	1200	51.2	108	82	0.95	I
LV-HE5550Lm 3000K CR182Dali	82N103XXYP02	27.0	1200	51.2	108	82	0.95	I
LV-HE5800Lm 4000K CR182No dim	82N103XXYZ02	27.1	1200	51.2	113	82	0.95	II
LV-HE 5800Lm 4000K CR182 1-10V& Push	82N103XXYV02	27.1	1200	51.2	113	82	0.95	I
LV-HE5800Lm 4000K CR182Dali	82N103XXYX02	27.1	1200	51.2	113	82	0.95	I
LV 3250Lm 3000K CR197No dim	821C03XXYS02	25.1	1200	50.5	64	97	0.95	II
LV 3750Lm 3000K CR197 1-10V& Push	821C03XXYJ02	25.6	1400	57.2	66	97	0.95	I
LV 3750Lm 3000K CR197Dali	821C03XXYN02	25.6	1400	57.2	66	97	0.95	I

All values are measured at 230V (+/- 7%).



slightly different

121



ø 235 mm

## COLOURS




Matt white  
RAL 9016 (XX=MW)



Matt black  
RAL 9005 (XX=BL)

# Cylinder CL 235


## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp		Lumen Output			Lumen/ Watt		
		CRI82	CRI97	CRI82 3000K	CRI82 4000K	CRI97 3000K	CRI82 3000K	CRI82 4000K	CRI97 3000K
Special request	250	9.2	9.4	1350	1400	800	147	152	85
Special request	350	13.1	13.2	1850	1900	1100	141	145	83
Standard	500	19.4	17.9	2525	2600	1450	130	134	81

## FIXATION DIMENSIONS

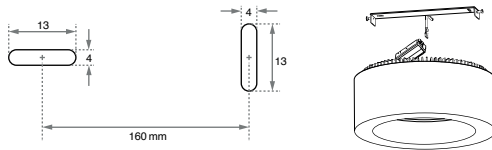

## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C/ +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



## ITEM SPECIFICATIONS See pricelist 2025 page 62

Description	Item code	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Cylinder CL 235 LV-HE 2525Lm 3000K CRI82 No dim	79N103XXY002	19.4	130	82	24.2	0.95	II
Cylinder CL 235 LV-HE 2525Lm 3000K CRI82 1-10V& Push	79N103XXY102	19.4	130	82	24.2	0.95	II
Cylinder CL 235 LV-HE 2525Lm 3000K CRI82 Dali	79N103XXY202	19.4	130	82	24.2	0.95	II
Cylinder CL 235 LV-HE 2600Lm 4000K CRI82 No dim	79N103XXY302	19.4	134	82	24.3	0.95	II
Cylinder CL 235 LV-HE 2600Lm 4000K CRI82 1-10V& Push	79N103XXY402	19.4	134	82	24.3	0.95	II
Cylinder CL 235 LV-HE 2600Lm 4000K CRI82 Dali	79N103XXY502	19.4	134	82	24.3	0.95	II
Cylinder CL 235 LV 1450Lm 3000K CRI97 No dim	791C03XXY602	17.9	81	97	22.3	0.95	II
Cylinder CL 235 LV 1450Lm 3000K CRI97 1-10V& Push	791C03XXY702	17.9	81	97	22.3	0.95	II
Cylinder CL 235 LV 1450Lm 3000K CRI97 Dali	791C03XXY802	17.9	81	97	22.3	0.95	II

All values are measured at 230V (+/- 7%).







SensorLinea



↔  
ø 90 mm

#### BEAM ANGLE



Reflector  
LV: 24° / 60°  
LV-TW: 60°



Lens  
HV-FD: 40°



Diffuser  
HV-FD: 80°  
LV: 80°  
LV-TW: 80°

#### COLOURS



Matt white  
RAL 9016 (XX=MM)



Matt black  
RAL 9005 (XX=BL)


#### SPRINGS



Standard with CS springs (concrete/gypoc).  
Also available as above with  
WS springs (gypoc/metal).

# Linea 75

## DIMENSIONS



## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136

## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP65 <sup>1</sup>
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	5,0	475	500	525	95	100	105
Special request	250	9.8	850	900	1000	87	92	102
Standard	350	13.8	1150	1250	1350	83	91	98



Using CS springs: Ø 75 mm.  
Thickness ceiling 5-60 mm  
& recess depth 60 mm.



Using WS springs: Ø 77 mm.  
Thickness ceiling 1-55 mm  
& recess depth 60 mm.

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

IP20	MADE IN HOLLAND	7 YEAR WARRANTY	ECO	<sup>1</sup> Not for HV-FD 40° version.
IP65				

This luminaire contains built-in LED lamps.  
There are no exchangeable parts inside the luminaire.  
EU 8742012



## ITEM SPECIFICATIONS See pricelist 2025 page 31

Description	40°		80°		W per lamp	Lm/W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR					
Linea 75									
HV-FD 800Lm 2700K Triac dim	912A03XX5A02	15.7	912A03XX5B02	26.9	10.5	76	93	0.99	I
HV-FD 800Lm 3000K Triac dim	912A03XX5C02	15.7	912A03XX5D02	26.9	10.3	78	93	0.99	I
HV-FD 800Lm 4000K Triac dim	912A03XX5E02	15.7	912A03XX5F02	26.9	10.1	79	93	0.99	I
HV-FD 800Lm 2200-3000K Triac dim	912A03XX5G02	15.7	912A03XX5H02	26.9	10.3	78	93	0.99	I

Description	24°		60°		80°		W per lamp	Lm/W	CRI (typ.)	PI	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	913A03XX4K02	24.1	913A03XX4L02	24.9	913A03XX4M02	29.4	12.9	128	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dali	913A03XX4B02	24.1	913A03XX4E02	24.9	913A03XX4H02	29.4	12.9	128	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	913B03XX4K02	24.2	913B03XX4L02	25.1	913B03XX4M02	29.6	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dali	913B03XX4B02	24.2	913B03XX4E02	25.1	913B03XX4H02	29.6	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	913E03XX4K02	24.3	913E03XX4L02	25.2	913E03XX4M02	29.6	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dali	913E03XX4B02	24.3	913E03XX4E02	25.2	913E03XX4H02	29.6	12.9	136	82	0.95	II
LV 1150Lm2700K CRI97 No dim	915A03XX4K02	22.8	915A03XX4L02	23.7	915A03XX4M02	28.1	13.8	83	97	0.93	II
LV 1150Lm2700K CRI97 Dali	915A03XX4B02	22.8	915A03XX4E02	23.7	915A03XX4H02	28.1	13.8	83	97	0.95	II
LV 1250Lm3000K CRI97 No dim	915B03XX4K02	23.1	915B03XX4L02	24.0	915B03XX4M02	28.4	13.8	91	97	0.93	II
LV 1250Lm3000K CRI97 Dali	915B03XX4B02	23.1	915B03XX4E02	24.0	915B03XX4H02	28.4	13.8	91	97	0.95	II
LV 1350Lm4000K CRI97 No dim	915G03XX4K02	23.4	915G03XX4L02	24.2	915G03XX4M02	28.7	13.8	98	97	0.93	II
LV 1350Lm4000K CRI97 Dali	915G03XX4B02	23.4	915G03XX4E02	24.2	915G03XX4H02	28.7	13.8	98	97	0.95	II
LV 1250Lm1800-3000K CRI97 Dali	915E03XX4B02	23.1	915E03XX4E02	24.0	915E03XX4H02	28.4	13.8	91	97	0.95	II
LV-TW 1250Lm2700-6500K CRI95/86 Dali	-	-	916A03XX4W02	24.0	916A03XX4Y02	28.4	11.4	110	95/86	0.90	II

LV versions also available with: Triac dim Casambi 1-10V & Push Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.




slightly different

127




# SensorLinea 75

## DIMENSIONS



## DETECTION AREA



## SPECIFICATIONS

Beam angle (FWHM)	80°
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP44
IK rate	IK03
Operating temperature (Ta)	-20°C / +30°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years
Detection range	120°
Turn-on time	200 ms
Inrush current	0 mA (max. 220 pcs. per type B16Amp)
Surge protection	L-N > 1kV; L-E, N-E > 2kV
Audible noise	21dB
Time setting	4 min. (cannot be changed)

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



Using CS springs: Ø 75 mm.  
Thickness ceiling 5-60 mm  
& recess depth 60 mm.



Using WS springs: Ø 77 mm.  
Thickness ceiling 1-55 mm  
& recess depth 60 mm.

IP20

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

IP44



Sensor luminaires turn on for 4 minutes after detecting movement.



Sensor luminaires turn on for 4 minutes after detecting movement.

brc bridgelux

## ITEM SPECIFICATIONS [See pricelist 2025 page 58](#)

Description	Item code	Extra	Input	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
SensorLinea 75 HV 600 Lm 3000K 80°	912S03XX5D02	Incl. 3P conn.box	220-240V	15.0	40	83	25.9	0.99	II
SensorLinea 75 HV 600 Lm 4000K 80°	912S03XX5F02	Incl. 3P conn.box	220-240V	15.0	40	83	25.9	0.99	II

All values are measured at 230V (+/- 7%).





↔  
ø 180 mm

#### BEAM ANGLE



Reflector  
LV: 24° / 60°  
LV-TW: 60°



Lens  
HV-FD: 40°



Diffuser  
HV-FD: 80°  
LV: 80°  
LV-TW: 80°

#### COLOURS



Matt white  
RAL 9016 (XX=MW)



Matt black  
RAL 9005 (XX=BL)


#### SPRINGS



Standard with GS springs (concrete/gyproc).  
Also available as above with  
WS springs (gyproc/metal).

# Linea 120

## DIMENSIONS



## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136
Special request	450	17.8	2075	2150	2175	116	120	122
Special request	500	19.7	2250	2325	2350	114	118	120

## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP65 <sup>1</sup>
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	5.0	475	500	525	95	100	105
Special request	250	9.8	850	900	1000	87	92	102
Standard	350	13.8	1150	1250	1350	83	91	98
Special request	450	18.0	1475	1600	1750	82	89	97
Standard	500	20.1	1625	1800	1925	81	89	96



Using GS springs: Ø 120-165mm.  
Thickness ceiling 8-70 mm & recess depth 70 mm. For plasterboard ceilings or similar harder materials Turn the ring on the front counterclockwise after installation.



Using WS springs: Ø 120-145mm.  
Thickness ceiling 1-35 & recess depth 70 mm. For soft ceiling tiles. We recommend using a wooden plate or a ceiling ring on the reverse side of the tile.



<sup>1</sup> Not for HV-FD 40° version.

## ITEM SPECIFICATIONS See pricelist 2025 page 40

Description Linea 120	40°		80°		W per lamp	Lm/ W	CRI (typ.)	P <sub>t</sub>	Safety class
	Item code	UGR	Item code	UGR					
HV-FD 800Lm 2700K Triac dim	892A03XX5J02	10.5	892A03XX5K02	217	10.5	76	93	0.99	I
HV-FD 800Lm 3000K Triac dim	892A03XX5L02	10.5	892A03XX5M02	217	10.3	78	93	0.99	I
HV-FD 800Lm 4000K Triac dim	892A03XX5N02	10.5	892A03XX5P02	217	10.1	79	93	0.99	I
HV-FD 800Lm 2200-3000K Triac dim	892A03XX5Q02	10.5	892A03XX5R02	217	10.3	78	93	0.99	I

Description Linea 120	24°		60°		80°		W per lamp	Lm/ W	CRI (typ.)	P <sub>t</sub>	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
LV-HE1650Lm 2700K CRI82 No dim	893A03XX2U02	18.9	893A03XX2V02	19.7	893A03XX2W02	24.2	12.9	123	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dali	893A03XX2L02	18.9	893A03XX2P02	19.7	893A03XX2S02	24.2	12.9	123	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	893B03XX2U02	19.0	893B03XX2V02	19.9	893B03XX2W02	24.3	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dali	893B03XX2L02	19.0	893B03XX2P02	19.9	893B03XX2S02	24.3	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	893E03XX2U02	19.1	893E03XX2V02	19.9	893E03XX2W02	24.4	12.9	135	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dali	893E03XX2L02	19.1	893E03XX2P02	19.9	893E03XX2S02	24.4	12.9	135	82	0.95	II
LV-HE2250Lm 2700K CRI82 No dim	893G03XX2U02	19.9	893G03XX2V02	20.8	893G03XX2W02	25.3	19.7	114	82	0.95	II
LV-HE2325Lm 3000K CRI82 No dim	893H03XX2U02	20.2	893H03XX2V02	21.0	893H03XX2W02	25.5	19.7	118	82	0.95	II
LV-HE2350Lm 4000K CRI82 No dim	893J03XX2U02	20.2	893J03XX2V02	21.1	893J03XX2W02	25.5	19.7	120	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	895A03XX2U02	17.6	895A03XX2V02	18.5	895A03XX2W02	22.9	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 Dali	895A03XX2L02	17.6	895A03XX2P02	18.5	895A03XX2S02	22.9	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	895B03XX2U02	17.9	895B03XX2V02	18.8	895B03XX2W02	23.2	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 Dali	895B03XX2L02	17.9	895B03XX2P02	18.8	895B03XX2S02	23.2	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	895G03XX2U02	18.2	895G03XX2V02	19.0	895G03XX2W02	23.5	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 Dali	895G03XX2L02	18.2	895G03XX2P02	19.0	895G03XX2S02	23.5	13.8	98	97	0.95	II
LV 1625Lm 2700K CRI97 No dim	895K03XX2U02	18.8	895K03XX2V02	19.7	895K03XX2W02	24.1	20.1	81	97	0.95	II
LV 1800Lm 3000K CRI97 No dim	895L03XX2U02	19.1	895L03XX2V02	20.0	895L03XX2W02	24.5	20.1	89	97	0.95	II
LV 1925Lm 4000K CRI97 No dim	895M03XX2U02	19.4	895M03XX2V02	20.3	895M03XX2W02	24.7	20.1	96	97	0.95	II
LV 1250Lm 1800-3000K CRI97 Dali	895E03XX2L02	17.9	895E03XX2P02	18.8	895E03XX2S02	23.2	13.8	91	97	0.95	II
LV-TW 1250Lm 2700-6500K CRI95/86 Dali	-	-	896B03XX2B02	18.8	896B03XX2D02	23.2	11.4	110	95/86	0.90	II

LV versions also available with: Dali Triac dim Casambi 1-10V & Push Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.




slightly different



# Linea 185

## DIMENSIONS



## SPECIFICATIONS

Beam angle (FWHM)	See the item specifications below
Fixture material	Housing: Die cast aluminium Reflector glass: Polycarbonate
Environment	Indoor
IP rate	IP20 / IP65
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN2031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years



Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

## CHOOSE YOUR LV LUMEN OUTPUT

CRI82 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	4.5	625	650	675	140	145	151
Special request	250	9.1	1225	1250	1275	135	138	140
Special request	350	12.9	1650	1725	1750	128	134	136
Special request	450	17.8	2075	2150	2175	116	120	122
Special request	500	19.7	2250	2325	2350	114	118	120
Special request	600	24.7	2650	2750	2775	107	111	112
Special request	650	27.3	2750	2875	2900	101	105	106

CRI97 standard	mA	W per lamp	Lumen Output			Lumen / Watt		
			2700K	3000K	4000K	2700K	3000K	4000K
Special request	125	5.0	475	500	525	95	100	105
Special request	250	9.8	850	900	1000	87	92	102
Standard	350	13.8	1150	1250	1350	83	91	98
Special request	450	18.0	1475	1600	1750	82	89	97
Standard	500	20.1	1625	1800	1925	81	89	96
Special request	600	23.9	1900	2050	2225	80	86	93
Standard	650	26.0	2050	2250	2400	79	86	92



Using GS springs. Ø 170-175mm. Thickness ceiling 8-85 mm & recess depth 85 mm. For plasterboard ceilings or similar harder materials. Turn the ring on the front counterclockwise after installation.



Using WS springs: Ø 180-210mm. Thickness ceiling 1-35 & recess depth 85 mm. For soft ceiling tiles. We recommend taking down the ceiling tile before installing the product.



## ITEM SPECIFICATIONS [See pricelist 2025 page 44](#)


Description	24°		60°		80°		W per lamp	Lm/ W	CRI (typ.)	Pr	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR					
Linea 185											
LV-HE1650Lm 2700K CRI82 No dim	873A03XX2U02	16.7	873A03XX2V02	17.6	873A03XX2W02	22.1	12.9	128	82	0.93	II
LV-HE 1650Lm 2700K CRI82 Dali	873A03XX2L02	16.7	873A03XX2P02	17.6	873A03XX2S02	22.1	12.9	128	82	0.95	II
LV-HE1725Lm 3000K CRI82 No dim	873B03XX2U02	16.9	873B03XX2V02	17.8	873B03XX2W02	22.2	12.9	134	82	0.93	II
LV-HE 1725Lm 3000K CRI82 Dali	873B03XX2L02	16.9	873B03XX2P02	17.8	873B03XX2S02	22.2	12.9	134	82	0.95	II
LV-HE1750Lm 4000K CRI82 No dim	873E03XX2U02	16.9	873E03XX2V02	17.8	873E03XX2W02	22.3	12.9	136	82	0.93	II
LV-HE1750Lm 4000K CRI82 Dali	873E03XX2L02	16.9	873E03XX2P02	17.8	873E03XX2S02	22.3	12.9	136	82	0.95	II
LV-HE2250Lm 2700K CRI82 No dim	873G03XX2U02	17.8	873G03XX2V02	18.7	873G03XX2W02	23.1	19.7	114	82	0.95	II
LV-HE2325Lm 3000K CRI82 No dim	873H03XX2U02	18.0	873H03XX2V02	18.9	873H03XX2W02	23.4	19.7	118	82	0.95	II
LV-HE2350Lm 4000K CRI82 No dim	873J03XX2U02	18.1	873J03XX2V02	18.9	873J03XX2W02	23.4	19.7	120	82	0.95	II
LV-HE2750Lm 2700K CRI82 No dim	873K03XX2U02	18.5	873K03XX2V02	19.4	873K03XX2W02	23.8	27.3	101	82	0.95	II
LV-HE2875Lm 3000K CRI82 No dim	873L03XX2U02	18.7	873L03XX2V02	19.5	873L03XX2W02	24.0	27.3	105	82	0.95	II
LV-HE2900Lm 4000K CRI82 No dim	873M03XX2U02	18.7	873M03XX2V02	19.6	873M03XX2W02	24.0	27.3	106	82	0.95	II
LV 1150Lm 2700K CRI97 No dim	875A03XX2U02	15.5	875A03XX2V02	16.3	875A03XX2W02	20.8	13.8	83	97	0.93	II
LV 1150Lm 2700K CRI97 Dali	875A03XX2L02	15.5	875A03XX2P02	16.3	875A03XX2S02	20.8	13.8	83	97	0.95	II
LV 1250Lm 3000K CRI97 No dim	875B03XX2U02	15.8	875B03XX2V02	16.6	875B03XX2W02	21.1	13.8	91	97	0.93	II
LV 1250Lm 3000K CRI97 Dali	875B03XX2L02	15.8	875B03XX2P02	16.6	875B03XX2S02	21.1	13.8	91	97	0.95	II
LV 1350Lm 4000K CRI97 No dim	875G03XX2U02	16.0	875G03XX2V02	16.9	875G03XX2W02	21.3	13.8	98	97	0.93	II
LV 1350Lm 4000K CRI97 Dali	875G03XX2L02	16.0	875G03XX2P02	16.9	875G03XX2S02	21.3	13.8	98	97	0.95	II
LV 1625Lm 2700K CRI97 No dim	875K03XX2U02	16.7	875K03XX2V02	17.5	875K03XX2W02	22.0	20.1	81	97	0.93	II
LV 1800Lm 3000K CRI97 No dim	875L03XX2U02	17.0	875L03XX2V02	17.9	875L03XX2W02	22.3	20.1	89	97	0.95	II
LV 1925Lm 4000K CRI97 No dim	875M03XX2U02	17.3	875M03XX2V02	18.1	875M03XX2W02	22.6	20.1	96	97	0.95	II
LV 2050Lm 2700K CRI97 No dim	875N03XX2U02	17.5	875N03XX2V02	18.3	875N03XX2W02	22.8	26.0	79	97	0.95	II
LV 2250Lm 3000K CRI97 No dim	875P03XX2U02	17.8	875P03XX2V02	18.7	875P03XX2W02	23.1	26.0	86	97	0.95	II
LV 2400Lm 4000K CRI97 No dim	875Q03XX2U02	18.0	875Q03XX2V02	18.9	875Q03XX2W02	23.3	26.0	92	97	0.95	II
LV 1250Lm 1800-3000K CRI97 Dali	875E03XX2L02	15.8	875E03XX2P02	16.6	875E03XX2S02	21.1	13.8	91	97	0.95	II
LV-TW 1250Lm 2700-6500K CRI95/86 Dali	-	-	876A03XX2B02	16.6	876A03XX2D02	21.1	11.4	110	95/86	0.90	II

LV versions also available with: Dali Triac dim Casambi 1-10V & Push. Check our datasheets, pricelist or website for all available versions

All values are measured at 230V (+/- 7%). See page 188-189 for the HV-FD dimmerlist.



slightly different



ø 140 mm

#### BEAM ANGLE



Reflector  
LV: 18° / 37° / 60°



Diffuser  
LV: 80° (On request)

#### COLOURS



Matt white  
RAL 9016 (XX=MW)



Matt black  
RAL 9005 (XX=BL)


#### SPRINGS



Standard with CS springs (concrete/gyproc).  
Also available as above with  
WS springs (gyproc/metal).

# Linea DS-FS 120

## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp			Lumen Output			Lumen / Watt		
		CRI82	CRI97		3000K	4000K	3000K	3000K	4000K	3000K
Special request	250	9.2	9.4	1350	1400	800	147	152	85	
Special request	350	13.1	13.2	1850	1900	1100	141	145	83	
Special request	500	19.4	17.9	2525	2600	1450	130	134	81	
Standard	700	27.9	27.0	3575	3650	2150	128	131	80	
Standard	800	32.4	32.1	3825	4050	2500	118	125	78	
Special request	900	36.8	35.5	4300	4500	2700	117	122	76	
Special request	1050	43.7	41.7	4900	5100	3000	112	117	72	
Standard	1200	51.2	50.5	5550	5800	3250	108	113	64	
Special request	1400	x	57.2	x	x	3750	x	x	66	

\* For large downlights CRI97 No dim. \* For large downlights CR97 1-10V and Dalí.

## SPECIFICATIONS

Beam angle (FWHM)	18°/ 37° / 60° (On request 80°)
Fixture material	Die cast aluminium/ Glass
Environment	Indoor
IP rate	IP20/ IP44
IK rate	IK09
Operating temperature (Ta)	-20°C/ +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

Ask our sales department about the possibilities for:

- Tuneable white 2700-6500K.
- Extra High CRI LED options (see page 32)



**IP20** Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

**IP44**



Using CS springs: Ø 120mm.  
Thickness ceiling 10-115mm & recess depth 115mm. For plasterboard ceilings or similar harder materials thicker than 9 mm.



Using WS springs: Ø 120-130mm.  
Thickness ceiling 1-40 mm & recess depth 115mm. For soft ceiling tiles. We recommend using a ceiling ring on the reverse side of the tile.



## ITEM SPECIFICATIONS See pricelist 2025 page 54

TCLIP LUMILEDS TE eldoLED bridgelux KGP

Description	18°		37°		60°		mA	W per lamp	Lm/ W	CRI (typ.)	Prl	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR						
Linea DS-FS 120												
LV-HE3575Lm 3000K CRI82 No dim	28N003XXCA02	18.6	28N003XXCB02	18.1	28N003XXCC02	21.1	700	27.9	128	82	0.95	II
LV-HE 3575Lm 3000K CRI82 1-10V & Push	28N003XXNA02	18.6	28N003XXNB02	18.1	28N003XXNC02	21.1	700	27.9	128	82	0.95	II
LV-HE3575Lm 3000K CRI82 Dalí	28N003XXPA02	18.6	28N003XXPB02	18.1	28N003XXPC02	21.1	700	27.9	128	82	0.95	II
LV-HE3650Lm 4000K CRI82 No dim	28N003XXCD02	18.6	28N003XXCE02	18.1	28N003XXCF02	21.1	700	27.9	131	82	0.95	II
LV-HE 3650Lm 4000K CRI82 1-10V & Push	28N003XXND02	18.6	28N003XXNE02	18.1	28N003XXNF02	21.1	700	27.9	131	82	0.95	II
LV-HE3650Lm 4000K CRI82 Dalí	28N003XXPD02	18.6	28N003XXPE02	18.1	28N003XXPF02	21.1	700	27.9	131	82	0.95	II
LV 2500Lm 3000K CRI97 No dim	282003XXCG02	17.3	282003XXCH02	16.8	282003XXCJ02	19.8	800	32.1	78	97	0.95	I
LV 2500Lm 3000K CRI97 1-10V & Push	282003XXNG02	17.3	282003XXNH02	16.8	282003XXNJ02	19.8	800	32.1	78	97	0.95	II
LV 2500Lm 3000K CRI97 Dalí	282003XXPG02	17.3	282003XXPH02	16.8	282003XXPJ02	19.8	800	32.1	78	97	0.95	II
LV-HE5550Lm 3000K CRI82 No dim	28N003XXCR02	20.1	28N003XXCS02	19.6	28N003XXCT02	22.6	1200	51.2	108	82	0.95	II
LV-HE 5550Lm 3000K CRI82 1-10V & Push	28N003XXNR02	20.1	28N003XXNL02	19.6	28N003XXNM02	22.6	1200	51.2	108	82	0.95	I
LV-HE5550Lm 3000K CRI82 Dalí	28N003XXPK02	20.1	28N003XXPL02	19.6	28N003XXPM02	22.6	1200	51.2	108	82	0.95	I
LV-HE5800Lm 4000K CRI82 No dim	28N003XXCU02	20.2	28N003XXCV02	19.7	28N003XXCW02	22.8	1200	51.2	113	82	0.95	II
LV-HE 5800Lm 4000K CRI82 1-10V & Push	28N003XXN02	20.2	28N003XXNP02	19.7	28N003XXNQ02	22.8	1200	51.2	113	82	0.95	I
LV-HE5800Lm 4000K CRI82 Dalí	28N003XXPN02	20.2	28N003XXPP02	19.7	28N003XXPQ02	22.8	1200	51.2	113	82	0.95	I
LV 3250Lm 3000K CRI97 No dim	282003XXFD02	18.2	282003XXFE02	17.7	282003XXFF02	20.8	1200	50.5	64	97	0.95	II
LV 3750Lm 3000K CRI97 1-10V & Push	282003XXNR02	18.7	282003XXNS02	18.2	282003XXNT02	21.2	1400	57.2	66	97	0.95	I
LV 3750Lm 3000K CRI97 Dalí	282003XXPR02	18.7	282003XXPS02	18.2	282003XXPT02	21.2	1400	57.2	66	97	0.95	I

All values are measured at 230V (+/- 7%).



slightly different

135



ø 180 mm

#### BEAM ANGLE



Reflector  
LV: 45° / 65°



Diffuser  
LV: 80° (On request)

#### COLOURS



Matt white  
RAL 9016 (XX=MM)



Matt black  
RAL 9005 (XX=BL)


#### SPRINGS



Standard with CS springs (concrete/gyproc).  
Also available as above with WSsprings  
(gyproc/metal).

# Linea DS-F 150

## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA		W per lamp			Lumen Output			Lumen / Watt		
	CRI82	CRI97	3000K	4000K	3000K	3000K	4000K	3000K	3000K	4000K	3000K
Special request	250	9.2	9.4	1350	1400	800	147	152	85		
Special request	350	13.1	13.2	1850	1900	1100	141	145	83		
Special request	500	19.4	17.9	2525	2600	1450	130	134	81		
Standard	700	27.9	27.0	3575	3650	2150	128	131	80		
Standard	800	32.4	32.1	3825	4050	2500	118	125	78		
Special request	900	36.8	35.5	4300	4500	2700	117	122	76		
Special request	1050	43.7	41.7	4900	5100	3000	112	117	72		
Standard	1200	51.2	50.5	5550	5800	3250	108	113	64		
Special request	1400	x	57.2	x	x	3750	x	x	66		

<sup>1</sup>For large downlights CRI97 No dim. <sup>2</sup>For large downlights CR971-10Vand Dalí.

## SPECIFICATIONS

Beam angle (FWHM)	45° / 65° (On request 80°)
Fixture material	Die cast aluminium / Glass
Environment	Indoor
IP rate	IP20 / IP44
IK rate	IK09
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

IP20

IP44

Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

Ask our sales department about the possibilities for:

- Tuneable white 2700-6500K.

- Extra High CRI LED options (see page 32)

TUNABLE  
WHITE



Using CS springs. Ø 160 mm.  
Thickness ceiling 5-148 mm & recess depth 148mm. For plasterboard ceilings or similar harder materials.



Using WS springs: Ø 150-165mm.  
Thickness ceiling 1-35 mm & recess depth 148mm. For soft ceiling tiles. We recommend using a ceiling ring on the reverse side of the tile.



ICL LUMILEDS <del>TE</del> eldoLED bridgelux KGP

## ITEM SPECIFICATIONS See pricelist 2025 page 55


Description Linea DS-F 150	45°		65°		mA	W per lamp	Lm / W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR						
LV-HE3575Lm 3000K CRI82 No dim	18N503XXJA02	16.2	18N503XXJB02	19.1	700	27.9	128	82	0.95	II
LV-HE 3575Lm 3000K CRI82 1-10V& Push	18N503XXN202	16.2	18N503XXN302	19.1	700	27.9	128	82	0.95	II
LV-HE3575Lm 3000K CRI82 Dalí	18N503XXP202	16.2	18N503XXP302	19.1	700	27.9	128	82	0.95	II
LV-HE3650Lm 4000K CRI82 No dim	18N503XXJC02	16.3	18N503XXJD02	19.2	700	27.9	131	82	0.95	II
LV-HE 3650Lm 4000K CRI82 1-10V& Push	18N503XXN402	16.3	18N503XXN502	19.2	700	27.9	131	82	0.95	II
LV-HE3650Lm 4000K CRI82 Dalí	18N503XXP402	16.3	18N503XXP502	19.2	700	27.9	131	82	0.95	II
LV 2500Lm 3000K CRI97 No dim	180503XXC02	15.0	180503XXC02	17.9	800	32.1	78	97	0.95	I
LV 2500Lm 3000K CRI97 1-10V& Push	180503XXN002	15.0	180503XXN102	17.9	800	32.1	78	97	0.95	II
LV 2500Lm 3000K CRI97 Dalí	180503XXP002	15.0	180503XXP102	17.9	800	32.1	78	97	0.95	II
LV-HE5550Lm 3000K CRI82 No dim	18N503XXCK02	17.7	18N503XXCL02	20.6	1200	51.2	108	82	0.95	II
LV-HE 5550Lm 3000K CRI82 1-10V& Push	18N503XXNU02	17.7	18N503XXNV02	20.6	1200	51.2	108	82	0.95	I
LV-HE5550Lm 3000K CRI82 Dalí	18N503XXPU02	17.7	18N503XXPV02	20.6	1200	51.2	108	82	0.95	I
LV-HE5800Lm 4000K CRI82 No dim	18N503XXCM02	17.9	18N503XXCN02	20.8	1200	51.2	113	82	0.95	II
LV-HE 5800Lm 4000K CRI82 1-10V& Push	18N503XXNW02	17.9	18N503XXNX02	20.8	1200	51.2	113	82	0.95	I
LV-HE5800Lm 4000K CRI82 Dalí	18N503XXPW02	17.9	18N503XXPX02	20.8	1200	51.2	113	82	0.95	I
LV 3250Lm 3000K CRI97 No dim	180503XXCP02	15.9	180503XXCQ02	18.8	1200	50.5	64	97	0.95	II
LV 3750Lm 3000K CRI97 1-10V& Push	180503XXNY02	16.4	180503XXNZ02	19.3	1400	57.2	66	97	0.95	I
LV 3750Lm 3000K CRI97 Dalí	180503XXPY02	16.4	180503XXPZ02	19.3	1400	57.2	66	97	0.95	I

All values are measured at 230V (+/- 7%).



slightly different

137



ø 230 mm

#### BEAM ANGLE



Reflector  
LV:45° / 65°



Diffuser  
LV:80° (On request)

#### COLOURS



Matt white  
RAL 9016 (XX=MW)



Matt black  
RAL 9005 (XX=BL)


#### SPRINGS



Standard with GSsprings (concrete/gyproc).  
Also available as above with  
WS springs (gyproc/metal).

# Linea DS-FX 185

## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp		Lumen Output			Lumen/ Watt		
		CRI82	CRI97	3000K	4000K	3000K	3000K	4000K	3000K
Special request	250	9.2	9.4	1350	1400	800	147	152	85
Special request	350	13.1	13.2	1850	1900	1100	141	145	83
Special request	500	19.4	17.9	2525	2600	1450	130	134	81
Standard	700	27.9	27.0	3575	3650	2150	128	131	80
Standard	800	32.4	32.1	3825	4050	2500	118	125	78
Special request	900	36.8	35.5	4300	4500	2700	117	122	76
Special request	1050	43.7	41.7	4900	5100	3000	112	117	72
Standard	1200	51.2	50.5	5550	5800	3250 <sup>1</sup>	108	113	64
Special request	1400	x	57.2	x	x	3750 <sup>2</sup>	x	x	66

<sup>1</sup> For large downlights CRI97 No dim. <sup>2</sup> For large downlights CR97 1-10V and Dalí.

## SPECIFICATIONS

Beam angle (FWHM)	45° / 65° (On request 80°)
Fixture material	Die cast aluminium/ Glass
Environment	Indoor
IP rate	IP20/ IP44
IK rate	IK09
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.  
EU 874/2012



Ask our sales department about the possibilities for:  
- Tuneable white 2700-6500K.  
- Extra High CRI LED options (see page 32)



Using GS springs. Ø 170-210mm.  
Thickness ceiling 8-173 mm & recess depth 173mm. For plasterboard ceilings or similar harder materials. Turn the ring on the front counterclockwise after installation.



Using WS springs: Ø 170-210mm.  
Thickness ceiling 1-40 mm & recess depth 173mm. For soft ceiling tiles we recommend using a wooden plate or a ceiling ring on the reverse side of the tile.



**IP20** Only when the product is installed in a closed ceiling may it be exposed to water splashes, and only on its front side.  
**IP44**

## ITEM SPECIFICATIONS See pricelist 2025 page 56

Description	45°		65°		mA	W per lamp	Lm/W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR						
Linea DS-FX 185										
LV-HE3575Lm 3000K CRI82 No dim	1BN703XXJE02	16.2	1BN703XXJF02	19.1	700	27.9	128	82	0.95	II
LV-HE 3575Lm 3000K CRI82 1-10V& Push	1BN703XXU202	16.2	1BN703XXU302	19.1	700	27.9	128	82	0.95	II
LV-HE3575Lm 3000K CRI82 Dalí	1BN703XXV202	16.2	1BN703XXV302	19.1	700	27.9	128	82	0.95	II
LV-HE3650Lm 4000K CRI82 No dim	1BN703XXJG02	16.3	1BN703XXJH02	19.2	700	27.9	131	82	0.95	II
LV-HE 3650Lm 4000K CRI82 1-10V& Push	1BN703XXU402	16.3	1BN703XXU502	19.2	700	27.9	131	82	0.95	II
LV-HE3650Lm 4000K CRI82 Dalí	1BN703XXV402	16.3	1BN703XXV502	19.2	700	27.9	131	82	0.95	II
LV 2500Lm 3000K CRI97 No dim	1BNA03XXG002	15.0	1BNA03XXGY02	17.9	800	32.1	78	97	0.95	I
LV 2500Lm 3000K CRI97 1-10V& Push	1BNA03XXU002	15.0	1BNA03XXU102	17.9	800	32.1	78	97	0.95	II
LV 2500Lm 3000K CRI97 Dalí	1BNA03XXV002	15.0	1BNA03XXV102	17.9	800	32.1	78	97	0.95	II
LV-HE5550Lm 3000K CRI82 No dim	1BN703XXG002	17.7	1BN703XXGL02	20.6	1200	51.2	108	82	0.95	II
LV-HE 5550Lm 3000K CRI82 1-10V& Push	1BN703XXU002	17.7	1BN703XXU002	20.6	1200	51.2	108	82	0.95	I
LV-HE5550Lm 3000K CRI82 Dalí	1BN703XXV002	17.7	1BN703XXV002	20.6	1200	51.2	108	82	0.95	I
LV-HE5800Lm 4000K CRI82 No dim	1BN703XXGM02	17.9	1BN703XXGN02	20.8	1200	51.2	113	82	0.95	II
LV-HE 5800Lm 4000K CRI82 1-10V& Push	1BN703XXU002	17.9	1BN703XXU002	20.8	1200	51.2	113	82	0.95	I
LV-HE5800Lm 4000K CRI82 Dalí	1BN703XXV002	17.9	1BN703XXV002	20.8	1200	51.2	113	82	0.95	I
LV 3250Lm 3000K CRI97 No dim	1BNA03XXGP02	15.9	1BNA03XXGQ02	18.8	1200	50.5	64	97	0.95	II
LV 3750Lm 3000K CRI97 1-10V& Push	1BNA03XXU002	16.4	1BNA03XXU002	19.3	1400	57.2	66	97	0.95	I
LV 3750Lm 3000K CRI97 Dalí	1BNA03XXV002	16.4	1BNA03XXV002	19.3	1400	57.2	66	97	0.95	I

All values are measured at 230V (+/- 7%).




slightly different



# Linea DS-A 195\*

## DIMENSIONS



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp		Lumen Output			Lumen / Watt		
		CRI82	CRI97	CRI82	CRI82	CRI97	CRI82	CRI82	CRI97
Special request	250	9.2	9.4	1350	1400	1520	147	152	85
Special request	350	13.1	13.2	1850	1900	1100	141	145	83
Special request	500	19.4	17.9	2525	2600	1450	130	134	81
Standard	700	27.9	27.0	3575	3650	2150	128	131	80
Standard	800	32.4	32.1	3825	4050	2500	118	125	78
Special request	900	36.8	35.5	4300	4500	2700	117	122	76
Special request	1050	43.7	41.7	4900	5100	3000	112	117	72
Standard	1200	51.2	50.5	5550	5800	3250	108	113	64
Special request	1400: x	57.2	x	x	x	3750 <sup>2</sup> : x	x	x	66

<sup>1</sup> For large downlights: CRI97 No dim. <sup>2</sup> For large downlights: CR97 1-10V and Dali.

## SPECIFICATIONS

Beam angle (FWHM)	18°/ 37° / 60° (On request 80°)
Fixture material	Die cast aluminium / Glass
Environment	Indoor
IP rate	IP20
IK rate	IK09
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

Ask our sales department about the possibilities for:

- Tuneable white 2700-6500K.
- Extra High CRI LED options (see page 32)



Using CS springs. Ø 195 mm. Thickness ceiling 5-135 mm & recess depth 135 mm. For plasterboard ceilings or similar harder materials. Turn the ring on the front counterclockwise after installation.



Using GS springs: Ø 195 mm. Thickness ceiling 1-135 mm & recess depth 135 mm. For soft ceiling tiles we recommend using a wooden plate or a ceiling ring on the reverse side of the tile.



eldoLED bridgelux KGP



## ITEM SPECIFICATIONS See pricelist 2025 page 57

Description	18°		37°		60°		mA	W per lamp	Lm / W	CRI (typ.)	Pf	Safety class
	Item code	UGR	Item code	UGR	Item code	UGR						
LV-HE3575Lm 3000K CRI82 No dim	13N603XXCA02	18.6	13N603XXCB02	18.1	130603XXCC02	21.1	700	27.9	128	82	0.95	II
LV-HE 3575Lm 3000K CRI82 1-10V & Push	13N603XXNA02	18.6	13N603XXNB02	18.1	130603XXNC02	21.1	700	27.9	128	82	0.95	II
LV-HE3575Lm 3000K CRI82 Dali	13N603XXPA02	18.6	13N603XXPB02	18.1	130603XXPC02	21.1	700	27.9	128	82	0.95	II
LV-HE3650Lm 4000K CRI82 No dim	13N603XXCD02	18.6	13N603XXCE02	18.1	130603XXCF02	21.1	700	27.9	131	82	0.95	II
LV-HE 3650Lm 4000K CRI82 1-10V & Push	13N603XXND02	18.6	13N603XXNE02	18.1	130603XXNF02	21.1	700	27.9	131	82	0.95	II
LV-HE3650Lm 4000K CRI82 Dali	13N603XXPD02	18.6	13N603XXPE02	18.1	130603XXPF02	21.1	700	27.9	131	82	0.95	II
LV 2500Lm 3000K CRI97 No dim	130603XXCG02	17.3	130603XXCH02	16.8	130603XXCJ02	19.8	800	32.1	78	97	0.95	I
LV 2500Lm 3000K CRI97 1-10V & Push	130603XXNG02	17.3	130603XXNH02	16.8	130603XXNJ02	19.8	800	32.1	78	97	0.95	II
LV 2500Lm 3000K CRI97 Dali	130603XXPG02	17.3	130603XXPH02	16.8	130603XXPJ02	19.8	800	32.1	78	97	0.95	II
LV-HE5550Lm 3000K CRI82 No dim	13N603XXCR02	20.1	13N603XXCS02	19.6	130603XXCT02	22.6	1200	51.2	108	82	0.95	II
LV-HE 5550Lm 3000K CRI82 1-10V & Push	13N603XXNR02	20.1	13N603XXNL02	19.6	130603XXNM02	22.6	1200	51.2	108	82	0.95	I
LV-HE5550Lm 3000K CRI82 Dali	13N603XXPK02	20.1	13N603XXPL02	19.6	130603XXPM02	22.6	1200	51.2	108	82	0.95	I
LV-HE5800Lm 4000K CRI82 No dim	13N603XXCU02	20.2	13N603XXCV02	19.7	130603XXCW02	22.8	1200	51.2	113	82	0.95	II
LV-HE 5800Lm 4000K CRI82 1-10V & Push	13N603XXNN02	20.2	13N603XXNP02	19.7	130603XXNQ02	22.8	1200	51.2	113	82	0.95	I
LV-HE5800Lm 4000K CRI82 Dali	13N603XXPN02	20.2	13N603XXPP02	19.7	130603XXPO02	22.8	1200	51.2	113	82	0.95	I
LV 3250Lm 3000K CRI97 No dim	130603XXFD02	18.2	130603XXFE02	17.7	130603XXFF02	20.7	1200	50.5	64	97	0.95	II
LV 3750Lm 3000K CRI97 1-10V & Push	130603XXNR02	18.7	130603XXNS02	18.2	130603XXNT02	21.2	1400	57.2	66	97	0.95	I
LV 3750Lm 3000K CRI97 Dali	130603XXPR02	18.7	130603XXPS02	18.2	130603XXPT02	21.2	1400	57.2	66	97	0.95	I

All values are measured at 230V (+/- 7%). \*Running out in 2024/2025



slightly different

Trackspots  
Katoen  
Linea AS



Slight®  
slightly different



Odion XS, With integrated power supply in the adapter, not visible after installation.




A honeycomb reduces the light output by ~25% compared to clear glass.)



↔  
ø 125 mm

## BEAM ANGLE

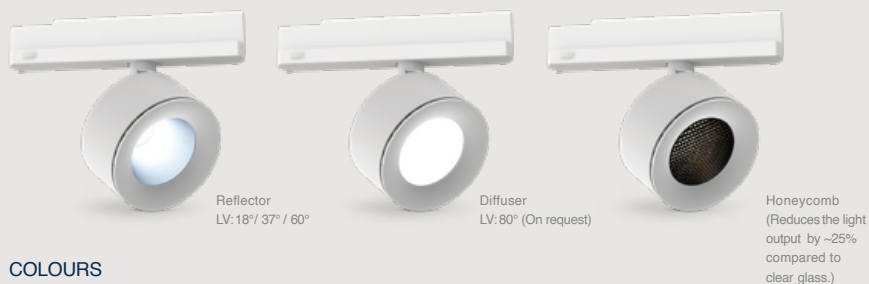

## COLOURS




Matt white  
RAL 9016 (XX=MW)

Matt black  
RAL 9005 (XX=BL)

# Linea AS-XS

## DIMENSIONS

With integrated power supply in the adapter, not visible after installation.



## TRACKS

On request! Ask our sales department about the possibilities.



## SPECIFICATIONS

Beam angle (FWHM)	18°/ 37° / 60° (On request 80°)
UGR(4H8H 70/50/20)	<19 (18° + 37°)
Fixture material	Die cast aluminium/ Glass
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C/ +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years
Safety class	I

IP20

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

Ask our sales department about the possibilities for:

- Extra High CRI LED options (see page 32)



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp			Lumen Output			Lumen / Watt		
		CRI82	CRI97		CRI82	CRI82	CRI97	CRI82	CRI82	CRI97
					3000K	4000K	3000K	3000K	4000K	3000K
Special request	500	19.4	17.9		2525	2600	1450	130	134	81
Standard	700	27.9	27.0		3575	3650	2150	128	131	80
Standard <sup>1</sup>	800	32.4	32.1		3825	4050	2500	118	125	78

<sup>1</sup>Standard for Linea AS-XS-CRI97 No dim.



## ITEM SPECIFICATIONS See pricelist 2025 page 64

Description	18°		37°		60°		mA	W per lamp	Lm/W	CRI (typ.)	Pf
	Item code	UGR	Item code	UGR	Item code	UGR					
Linea AS-XS-HE3575Lm 3000K CRI82 No dim	17N403XXHK02	13.5	17N403XXHL02	13.4	17N403XXHM02	16.6	700	27.0	128	82	0.97
Linea AS-XS-HE3575Lm 3000K CRI82 Dali	17N403XXE402	13.5	17N403XXE502	13.4	17N403XXE602	16.6	700	27.0	128	82	0.97
Linea AS-XS-HE 3575Lm 3000K CRI82 Casambi	17N403XXJ402	13.5	17N403XXJ502	13.4	17N403XXJ602	16.6	700	27.0	128	82	0.97
Linea AS-XS-HE3650Lm 4000K CRI82 No dim	17N403XXHN02	13.5	17N403XXHP02	13.5	17N403XXHQ02	16.7	700	27.0	131	82	0.97
Linea AS-XS-HE3650Lm 4000K CRI82 Dali	17N403XXE702	13.5	17N403XXE802	13.5	17N403XXE902	16.7	700	27.0	131	82	0.97
Linea AS-XS-HE 3650Lm 4000K CRI82 Casambi	17N403XXJ702	13.5	17N403XXJ802	13.5	17N403XXJ902	16.7	700	27.0	131	82	0.97
Linea AS-XS2500Lm 3000K CRI97 No dim	170403XXHG02	14.3	170403XXHH02	15.3	170403XXHJ02	19.8	800	32.1	78	97	0.97
Linea AS-XS2150Lm 3000K CRI97 Dali	170403XXE102	14.2	170403XXE202	15.2	170403XXE302	19.6	700	27.0	80	97	0.97
Linea AS-XS2150Lm 3000K CRI97 Casambi	170403XXJ102	14.2	170403XXJ202	15.2	170403XXJ302	19.6	700	27.0	80	97	0.97

All values are measured at 230V (+/- 7%).



slightly different

145



UP TO  
5800 LM

ø 100 mm

### BEAM ANGLE



Reflector  
LV: 18° / 37° / 60°



Diffuser  
LV: 80° (On request)



Honeycomb  
(Reduces the light  
output by ~25%  
compared to clear  
glass.)

### COLOURS



Matt white  
RAL 9016



Matt black  
RAL 9005

### FRONT RINGS



61



62



65



71



72




76

# Odion XS

## DIMENSIONS

With integrated power supply in the adapter, not visible after installation.

228mm CRI80 +Stylist Series No dim      162mm CRI97 No dim  
 253mm CRI80 +Stylist Series Dali      253mm CRI97 Dali  
 228mm CRI80 +Stylist Series Casambi      228mm CRI97 Casambi



## SPECIFICATIONS

Beam angle (FWHM)	18°/ 37° / 60° (On request 80°)
UGR(4H8H 70/50/20)	<19 (18° +37°)
Fixture material	Die cast aluminium / Glass
Environment	Indoor
IP rate	IP20
IK rate	IK09
Operating temperature (Ta)	-20°C/ +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years
Safety class	I

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

Ask our sales department about the possibilities for:

- Extra High CRI LED options (see page 32)

## TRACKS

On request! Ask our sales department about the possibilities.



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp			Lumen Output			Lumen/ Watt		
		CRI82	CRI97		CRI82	CRI82	CRI97	CRI82	CRI82	CRI97
					3000K	4000K	3000K	3000K	4000K	3000K
Special request	500	19.4	17.9		2525	2600	1450	130	134	81
Standard	700	27.9	27.0		3575	3650	2150	128	131	80
Special request	800	32.4	32.1		3825	4050	2500	118	125	78
Special request	850	x	33.9	x	x	x	2600	x	x	
Special request	900	36.8	35.5		4300	4500	2700	117	122	76
Standard 1	1050	43.7	41.7		4900	5100	3000	112	117	72
Standard	1200	51.2	50.5		5550	5800	3250	108	113	64
Special request	1400	x	57.2	x	x	x	3750	x	x	66

<sup>1</sup>Standard for Odion XS-CRI97 No dim.

## CHOOSE YOUR COLOURS

Housing/ Front ring	Item code	Housing/ Front ring	Item code
White/Gold	XX=61	Black/Gold	XX=71
White/Black	XX=62	Black/Black	XX=72
White/ White	XX=65	Black/ White	XX=76



## ITEM SPECIFICATIONS See pricelist 2025 page 65


Description	18°		37°		60°		mA	W per lamp	lm/W	CRI (typ.)	Pf
	Item code	UGR	Item code	UGR	Item code	UGR					
Odion XS-HE 3575Lm 3000K CRI82 No dim	35N403XXHK02	24.2	35N403XXHL02	25.4	35N403XXHM02	24.7	700	27.0	128	82	0.97
Odion XS-HE 3575Lm 3000K CRI82 Dali	35N403XXE402	24.2	35N403XXE502	25.4	35N403XXE602	24.7	700	27.0	128	82	0.97
Odion XS-HE 3575Lm 3000K CRI82 Casambi	35N403XXJ402	24.2	35N403XXJ502	25.4	35N403XXJ602	24.7	700	27.0	128	82	0.97
Odion XS-HE 3650Lm 4000K CRI82 No dim	35N403XXHN02	24.3	35N403XXHP02	25.5	35N403XXHQ02	24.8	700	27.0	131	82	0.97
Odion XS-HE 3650Lm 4000K CRI82 Dali	35N403XXE702	24.3	35N403XXE802	25.5	35N403XXE902	24.8	700	27.0	131	82	0.97
Odion XS-HE 3650Lm 4000K CRI82 Casambi	35N403XXJ702	24.3	35N403XXJ802	25.5	35N403XXJ902	24.8	700	27.0	131	82	0.97
Odion XS3000Lm 3000K CRI97 No dim	350403XXHG02	23.5	350403XXHH02	24.8	350403XXHU02	24.1	1050	41.7	72	97	0.97
Odion XS 2150Lm 3000K CRI97 Dali	350403XXE102	22.4	350403XXE202	23.6	350403XXE302	22.9	700	27.0	80	97	0.97
Odion XS 2150Lm 3000K CRI97 Casambi	350403XXJ102	22.4	350403XXJ202	23.6	350403XXJ302	22.9	700	27.0	80	97	0.97
Odion XS-HE 5550Lm 3000K CRI82 No dim	35N403XXHA02	25.7	35N403XXHB02	26.9	35N403XXHC02	26.2	1200	51.2	108	82	0.97
Odion XS-HE 5800Lm 4000K CRI82 No dim	35N403XXHD02	25.8	35N403XXHE02	27.1	35N403XXHF02	26.4	1200	51.2	113	82	0.97
Odion XS3250Lm 3000K CRI97 No dim	35N403XXHR02	24.7	35N403XXHS02	25.6	350403XXHT02	24.9	1200	50.5	64	97	0.97


All values are measured at 230V (+/- 7%).




slightly different


# Track system accessories diagram

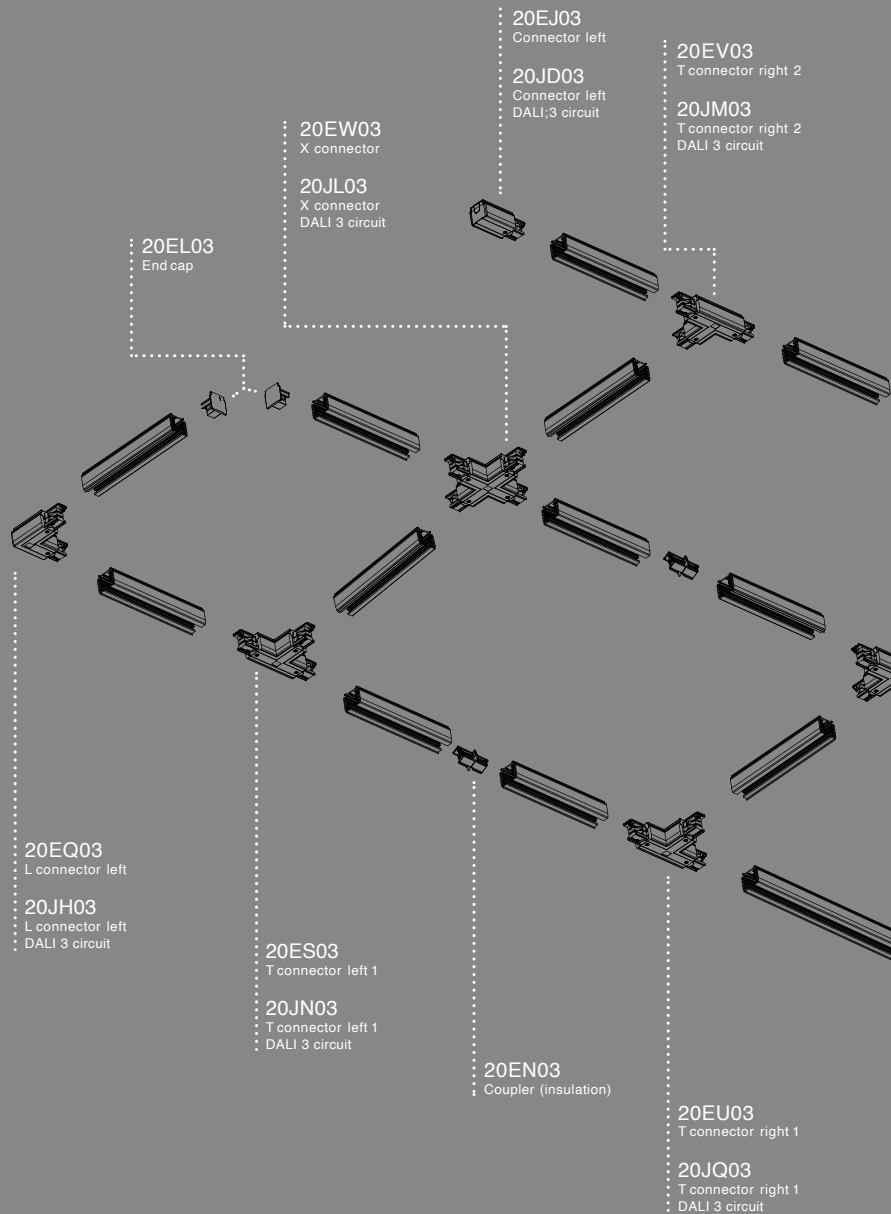

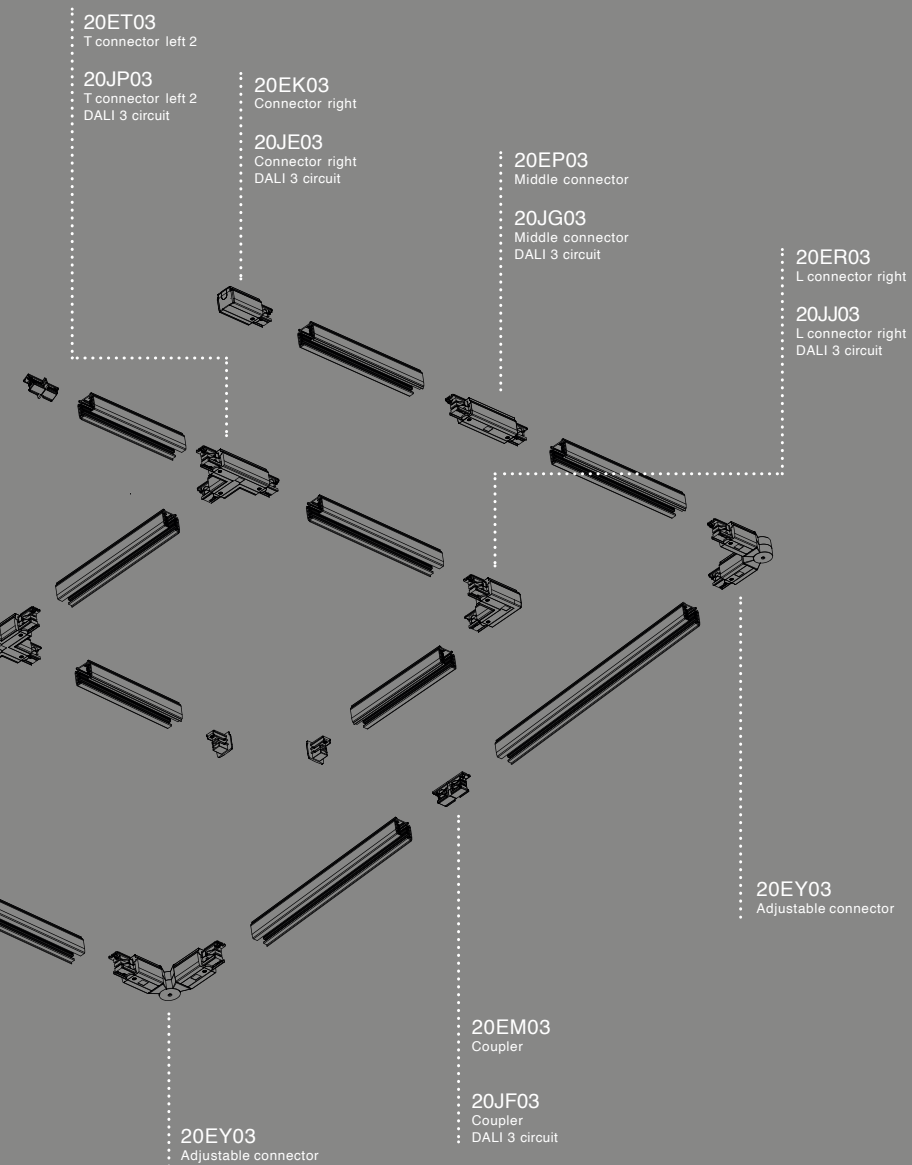



Cortina 2L 595x595,  
also available in  
620x620,

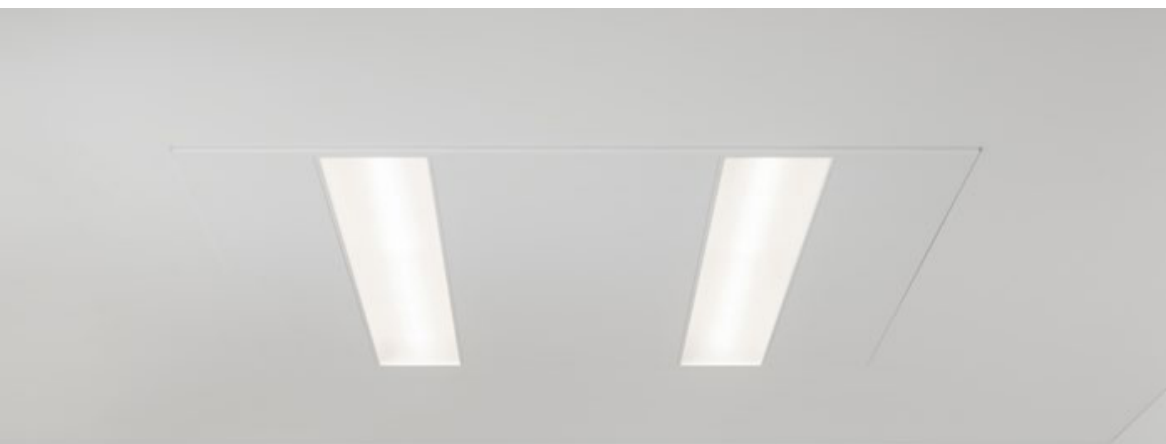

Also available with patented  
integrated active air ventilation

slightly different


151



Porsche showroom  
Linessa 2L 1195x295



Welkom bij Porsche Centrum Twente.

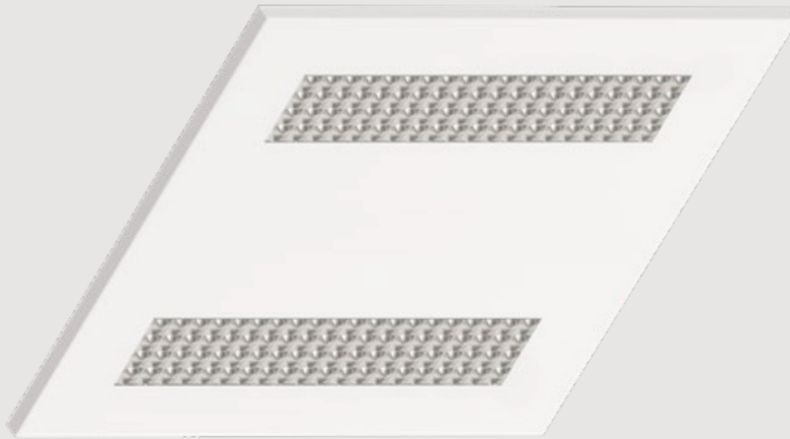

595x595 / 620x620 mm

#### COLOURS



Ceiling plate: Matt white RAL9016  
Reflector cups: chrome




Ceiling plate: Matt white RAL9016  
Reflector cups: white (on request)

#### DIMENSIONS ON REQUEST

- 1195x295 mm
- 1720x112mm

# Linezza 2L 595x595 / 620x620

## DIMENSIONS

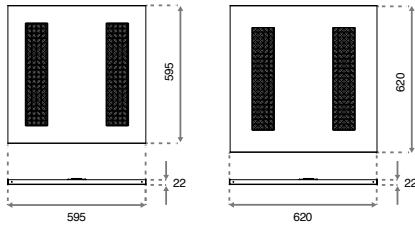

## SPECIFICATIONS

Dimensions	595x595 (XX=C3) / 620x620 (XX=C2)
Beam angle (FWHM)	Chrome: 77° (Standard) White: 86° (Special request)
UGR (4H8H 70/50/20)	<8
Fixture material	Housing: Steel Reflector optic: Polycarbonate
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

IP20



DELTA ELECTRONICS bhc TCI eldoLED KGP

## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp	Lumen Output		Lumen / watt		UGR	
			3000K	4000K	3000K	4000K	3000K	4000K
Special request	350	166	2350	2450	142	148	126	128
Standard	500	238	3300	3450	139	145	138	140
Special request	600	28.6	3950	4100	138	143	144	146
Standard	700	33.6	4550	4750	135	141	149	151
Special request	900	43.5	5800	6000	133	138	158	159
Special request	1050	51.0	6500	6750	127	132	162	163

## ITEM SPECIFICATIONS


See pricelist 2025 page 67

Description	Item code	mA	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Linezza 2L 3300Lm 3000K No dim	3DXX03CHXA02	500	238	139	83	138	0.95	II
Linezza 2L 3300Lm 3000K 1-10V & Push	3DXX03CHXE02	500	238	139	83	138	0.95	II
Linezza 2L 3300Lm 3000K Dali	3DXX03CHXC02	500	238	139	83	138	0.95	II
Linezza 2L 4550Lm 3000K No dim	3DXX03CHSG02	700	33.6	135	83	149	0.95	I
Linezza 2L 4550Lm 3000K 1-10V & Push	3DXX03CHSM02	700	33.6	135	83	149	0.95	II
Linezza 2L 4550Lm 3000K Dali	3DXX03CHSK02	700	33.6	135	83	149	0.95	II
Linezza 2L 3450Lm 4000K No dim	3DXX03CHXB02	500	238	145	83	140	0.95	II
Linezza 2L 3450Lm 4000K 1-10V & Push	3DXX03CHXF02	500	238	145	83	140	0.95	II
Linezza 2L 3450Lm 4000K Dali	3DXX03CHXD02	500	238	145	83	140	0.95	II
Linezza 2L 4750Lm 4000K No dim	3DXX03CHSH02	700	33.6	141	83	151	0.95	I
Linezza 2L 4750Lm 4000K 1-10V & Push	3DXX03CHSN02	700	33.6	141	83	151	0.95	II
Linezza 2L 4750Lm 4000K Dali	3DXX03CHSL02	700	33.6	141	83	151	0.95	II

All values are measured at 230V (+/- 7%).




slightly different

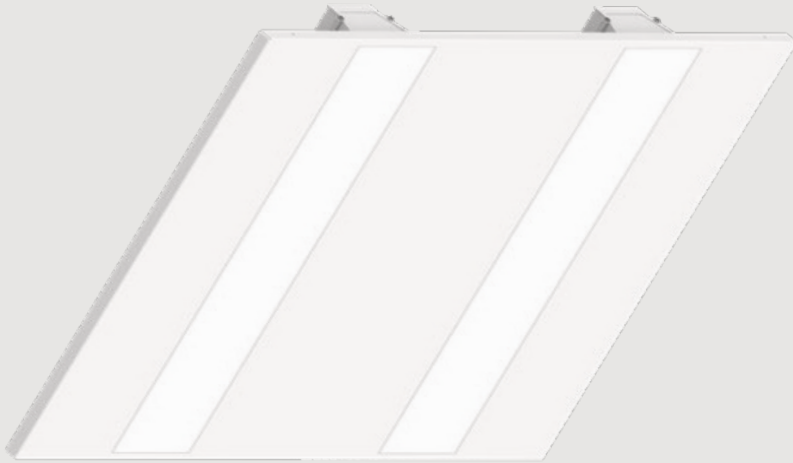

595x595 / 620x620 mm

#### OTHER DIMENSIONS

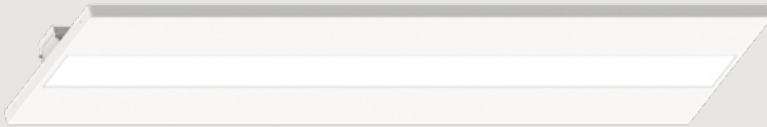

1195x295 mm



1720x100 mm


Check our datasheets, pricelist or website for all available versions and more information. Or ask our sales department.

#### COLOURS

Matt white  
RAL 9016

# Cortina 2L 595x595 / 620x620

## DIMENSIONS

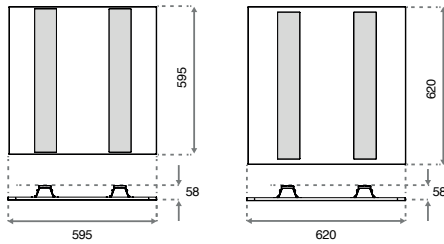

## SPECIFICATIONS

Dimensions	595x595 (XX=C3)/ 620x620 (XX=C2)
Beam angle (FWHM)	80° (Standard)
UGR (4H8H 70/50/20)	<19
Fixture material	Housing: Steel / Lens: Polycarbonate Diffuser: PMMA
Environment	Indoor
IP rate	IP20
IK rate	IK03
Operating temperature (Ta)	-20°C/ +45°C
Safety marks	EN60598 / EN62031/ EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012

IP20



SAMSUNG TCE eldoLED KGP

## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp	Lumen Output		Lumen / watt		UGR	
			3000K	4000K	3000K	4000K	3000K	4000K
Special request	500	19,0	2600	2700	137	142	175	176
Standard	700	27,1	3500	3700	129	137	185	187
Special request	900	35,4	4400	4600	124	130	193	195
Standard	1050	41,8	5050	5300	121	127	198	20,0
Special request	1200	48,4	5700	5950	118	123	20,2	20,4


## ITEM SPECIFICATIONS [See pricelist 2025 page 66](#)

Description	Item code	mA	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Cortina 2L 3500Lm 3000K No dim	CAXX03MWSG02	700	27,1	129	83	185	0,95	II
Cortina 2L 3500Lm 3000K 1-10V& Push	CAXX03MWSM02	700	27,1	129	83	185	0,95	II
Cortina 2L 3500Lm 3000K Dali	CAXX03MWSK02	700	27,1	129	83	185	0,95	II
Cortina 2L 5050Lm 3000K No dim	CAXX03MWTRO2	1050	41,8	121	83	198	0,95	I
Cortina 2L 5050Lm 3000K 1-10V& Push	CAXX03MWTTO2	1050	41,8	121	83	198	0,95	II
Cortina 2L 5050Lm 3000K Dali	CAXX03MWTVO2	1050	41,8	121	83	198	0,95	II
Cortina 2L 3700Lm 4000K No dim	CAXX03MWSH02	700	27,1	137	83	187	0,95	II
Cortina 2L 3700Lm 4000K 1-10V& Push	CAXX03MWSN02	700	27,1	137	83	187	0,95	II
Cortina 2L 3700Lm 4000K Dali	CAXX03MWSL02	700	27,1	137	83	187	0,95	II
Cortina 2L 5300Lm 4000K No dim	CAXX03MWTSo2	1050	41,8	127	83	20,0	0,95	I
Cortina 2L 5300Lm 4000K 1-10V& Push	CAXX03MWTU02	1050	41,8	127	83	20,0	0,95	II
Cortina 2L 5300Lm 4000K Dali	CAXX03MWTW02	1050	41,8	127	83	20,0	0,95	II


All values are measured at 230V (+/- 7%).



slightly different

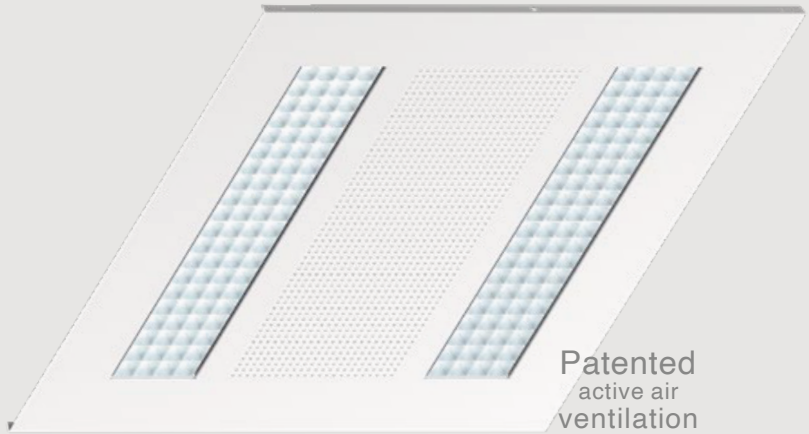

595x595 / 620x620 mm

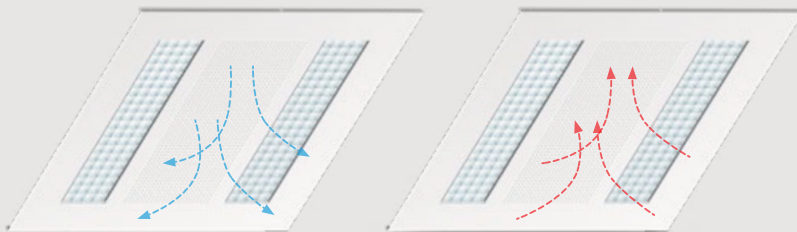

Lighting with integrated ventilation

### COLOURS




Ceiling plate: Matt white RAL9010  
Reflector cups: chrome



Ceiling plate: Matt white RAL9010  
Reflector cups: white (on request)


### PLENUM BOX



Can be connected to all major ventilation systems.

# Linessa Air 2L

## DIMENSIONS

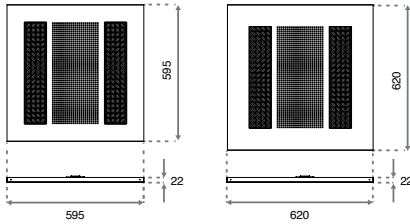

## SPECIFICATIONS

Dimensions	595x595 (XX=C3) / 620x620 (XX=C2)
Ventilation holes	100 cm <sup>2</sup>
Beam angle (FWHM)	Chrome: 77° (Standard) White: 86° (Special request)
UGR (4H8H 70/50/20)	<16
Fixture material	Housing: Steel Reflector optic: Polycarbonate
Environment	Indoor
IP rate	IP20
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years

This luminaire contains built-in LED lamps.

There are no exchangeable parts inside the luminaire.

EU 874/2012



## CHOOSE YOUR LUMEN OUTPUT

	mA	W per lamp	Lumen Output		Lumen / watt		UGR	
			3000K	4000K	3000K	4000K	3000K	4000K
Special request	350	166	2350	2450	142	148	12,6	12,8
Standard	500	23,8	3300	3450	139	145	13,8	14,0
Special request	600	28,6	3950	4100	138	143	14,4	14,6
Standard	700	33,6	4550	4750	135	141	14,9	15,1
Special request	900	43,5	5800	6000	133	138	15,8	15,9
Special request	1050	51,0	6500	6750	127	132	16,2	16,3

## ITEM SPECIFICATIONS See pricelist 2025 page 68

Description	Item code	mA	W per lamp	Lm/W	CRI (typ.)	UGR	Pf	Safety class
Linessa Air 2L LV 3300Lm 3000K No dim	3DXXSLCHXA02	500	23,8	139	83	13,8	0,95	II
Linessa Air 2L LV 3300Lm 3000K 1-10V& Push	3DXXSLCHXE02	500	23,8	139	83	13,8	0,95	II
Linessa Air 2L LV 3300Lm 3000K Dali	3DXXSLCHXC02	500	23,8	139	83	13,8	0,95	II
Linessa Air 2L LV 4550Lm 3000K No dim	3DXXSLCHSG02	700	33,6	135	83	14,9	0,95	II
Linessa Air 2L LV 4550Lm 3000K 1-10V& Push	3DXXSLCHSM02	700	33,6	135	83	14,9	0,95	II
Linessa Air 2L LV 4550Lm 3000K Dali	3DXXSLCHSK02	700	33,6	135	83	14,9	0,95	II
Linessa Air 2L LV 3450Lm 4000K No dim	3DXXSLCHXB02	500	23,8	145	83	14,0	0,95	II
Linessa Air 2L LV 3450Lm 4000K 1-10V& Push	3DXXSLCHXF02	500	23,8	145	83	14,0	0,95	II
Linessa Air 2L LV 3450Lm 4000K Dali	3DXXSLCHXD02	500	23,8	145	83	14,0	0,95	II
Linessa Air 2L LV 4750Lm 4000K No dim	3DXXSLCHSH02	700	33,6	141	83	15,1	0,95	I
Linessa Air 2L LV 4750Lm 4000K 1-10V& Push	3DXXSLCHSN02	700	33,6	141	83	15,1	0,95	II
Linessa Air 2L LV 4750Lm 4000K Dali	3DXXSLCHSL02	700	33,6	141	83	15,1	0,95	II

All values are measured at 230V (+/- 7%).



slightly different

## EMERGENCY CONTROL



## BATTERY PACK



## LED INDICATOR




Large downlights: Indicator can be mounted into the rim of the downlight.

Small downlights: Indicator can be mounted into the ceiling next to the downlight


# Emergency pack

## DIMENSIONS


### Emergency control



### Battery Pack 1Hr

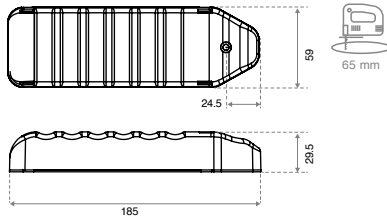

### Battery Pack 3Hr

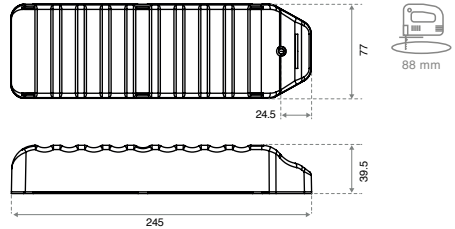

## SPECIFICATIONS

Input Voltage	220-240V 50-60Hz
Emergency Wattage	2-4.5W
Safety Marks	EN 61000/ 61347/ EN61547
EMC compliance	EN55015
Operating temperature	0° - 45°C
Max. pcs for B16A	27 pcs
Inrush current	27A 250usec
IP rate	IP20
Environment	Indoor
Housing material	Polyamid
Expected Lifetime	4 years
Warranty	2 years
Battery type	Ni-Cd
Charging time	24 Hrs (max. 500x)
Length LED cable	350mm
Hole size for Indicator	Ø 9mm
Indicator green	No action needed

DIP-SWITCH	DIP-SWITCH	Working voltage during emergency (V.)	Output current during emergency (I)	Power max. for LED modules
Special request	A	12V cost.	200 ±10%	24 W
Special request	B	24 V cost.	160 ±10%	30 W
Special request	C	46 V cost.	60 ±10%	50 W
Standard	D	9...58 V	200...30mA	-

## ITEM SPECIFICATIONS See pricelist 2025 page 70

Description	Item code	Type	Battery capacity
EP 1Hr 4-P	185LVPS3EPI-4	incl. battery and lamp	7.2V -1.6 Ah
EP 3Hr 4-P	185LVPS3EP3-4	incl. battery and lamp	7.2V -4.0 Ah
EP 1Hr 5-P*	185LVPS3EPI-5	incl. battery and lamp	7.2V -1.6 Ah
EP 3Hr 5-P*	185LVPS3EP3-5	incl. battery and lamp	7.2V -4.0 Ah

All values are measured at 230V (+/- 7%). \*For use with Dali.



# Correction ring

See pricelist 2025 page 71

The LEDluminaire fits flush in the correction ring, creating a natural and elegant look.


The correction ring can also be placed inside the ceiling to prevent the springs from damaging the ceiling panel.



## A. CORRECTION RING 75-110 MM

The correction ring is used in (retrofit) installations with existing hole sizes measuring 75-100 mm. For use with Fluxe 75, Linea 75 and Curion 75.



Item code	00BV03MW0000
Colour	Matt White RAL 9016
Type of material	Steel



## B. CORRECTION RING 150-230 MM

The correction ring is used in (retrofit) installations with existing hole sizes measuring 150-210mm. For use with Linea DS-F 150.


Item code	009703MW0000
Colour	Matt White RAL 9016
Type of material	Steel

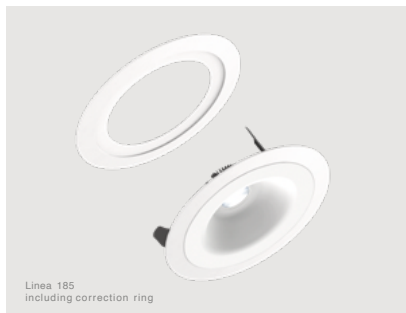

## C. CORRECTION RING 185-290 MM

The correction ring is used in (retrofit) installations with existing hole sizes measuring 215-250 mm. For use with Linea 185.


Item code	009403MW0000
Colour	Matt White RAL 9016
Type of material	Steel



## D. CORRECTION RING 80-90 MM

The correction ring is used to make the smallrim a little bigger for more easy installation.


Item code	00C903XX0000
Colour	Matt White RAL 9016 (XX=MW) Matt black RAL 9005 (XX=BL)
Type of material	Aluminium



Accessible ceilings  
 Only if you can access the backside of the ceiling a second correction ring can be used to cover holes up to Ø 250 mm (sandwich solution).

Ceiling holes  
 A.=75 - 100 mm  
 B. =150 - 220 mm  
 C.=75 - 100 mm

Correction rings  
 A. 75x110  
 B. 150x230  
 C.185x295

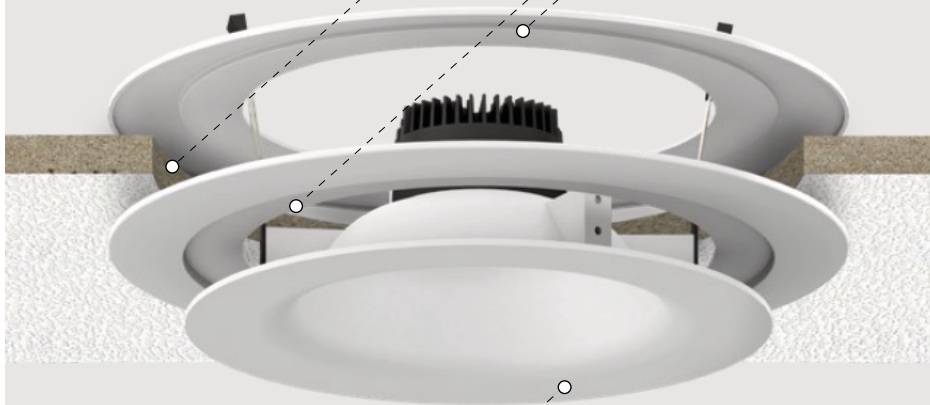

Non-Accessible ceilings  
 If the ceiling is not accessible for installing the second ring MIYO can make longer springs (minimum order of 50 units).


Luminaires to use with  
 A. For use with Fluxe 75, Linea 75 and Curion 75.  
 B. For Use with Linea DS-F 150.  
 C. For use with Linea 185.

## CUSTOM DIMENSIONS BY

**MIYO**  
 Make it your own.


Special correction rings can be made in any dimension up till 600mm even with springs attached. Instead of stamping they are made by cnc processto reach optimum design adapted to the inner luminaire rim. Minimum order of 50 units.

Colour: Any requested colour  
 Type of material: Aluminium

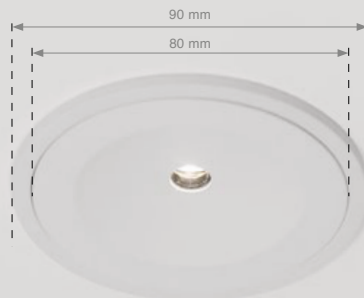

# Central PSU Mini Downlights (mA)

350 / 500 / 700 MA

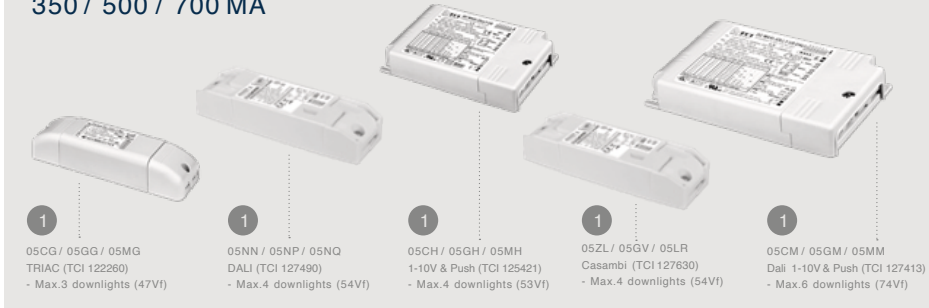

## DIMMABLE CENTRAL POWER SUPPLIES See pricelist 2025 page 70


350mA - 05CG03MLMD00 / 05NN03MLMD00 / 05CH03MLMD00 / 05ZL03MLMD00 / 05CM03MLMD00  
 500mA - 05GG03MLME00 / 05NP03MLME00 / 05GH03MLME00 / 05GV03MLME00 / 05GM03MLME00  
 700mA - 05MG03MLMF00 / 05NQ03MLMF00 / 05MH03MLMF00 / 05LR03MLMF00 / 05MM03MLMF00

## POWER SUPPLY UNITS CONSTANT CURRENT (mA)

Description	Item code	Watt	Current	Efficiency	Pf	Ripple	Input	Dimensions	Inrush current	B-16A Fuse
PSU17W350mA Triac	05CG03MLMD00	17W (47Vf)	350mA	85%	0.97	<3%	220-240V	166x46x34 mm	5A 50µS	50 pcs
PSU18W350mA Dali	05NN03MLMD00	18W (54Vf)	350mA	90%	0.95	<3%	220-240V	147x44x30 mm	5A 50µS	50 pcs
PSU 18W350mA 1-10V& Push	05CH03MLMD00	18W (53Vf)	350mA	90%	0.95	<3%	220-240V	103x67x21mm	5A 50µS	50 pcs
PSU 18.5W350mA Casambi	05ZL03MLMD00	18.5W (54Vf)	350mA	90%	0.95	<3%	220-240V	147x44x30 mm	5A 50µS	50 pcs
PSU25W 350mA Dali / 1-10V&Push	05CM03MLMD00	25W (74Vf)	350mA	89%	0.95	<3%	220-240V	124x79x22 mm	10A 200µS	30 pcs
PSU24W 500mA Triac	05GG03MLME00	24W (47Vf)	500mA	85%	0.97	<3%	220-240V	166x46x34 mm	5A 50µS	50 pcs
PSU27W 500mA Dali	05NP03MLME00	27W (54Vf)	500mA	90%	0.95	<3%	220-240V	147x44x30 mm	5A 50µS	50 pcs
PSU25W 500mA 1-10V& Push	05GH03MLME00	25W (50Vf)	500mA	90%	0.95	<3%	220-240V	103x67x21mm	5A 50µS	50 pcs
PSU27W 500mA Casambi	05GV03MLMD00	27W (54Vf)	500mA	90%	0.95	<3%	220-240V	147x44x30 mm	5A 50µS	50 pcs
PSU35W 500mA Dali / 1-10V&Push	05GM03MLME00	35W (72Vf)	500mA	89%	0.95	<3%	220-240V	124x79x22 mm	10A 200µS	30 pcs
PSU32W 700mA Triac	05MG03MLMF00	32W (46Vf)	700mA	85%	0.97	<3%	220-240V	166x46x34 mm	5A 50µS	50 pcs
PSU38W 700mA Dali	05NQ03MLMF00	38W (54Vf)	700mA	90%	0.95	<3%	220-240V	147x44x30 mm	5A 50µS	50 pcs
PSU32W 700mA 1-10V& Push	05MH03MLMF00	32W (46Vf)	700mA	90%	0.95	<3%	220-240V	103x67x21mm	5A 50µS	50 pcs
PSU36W 700mA Casambi	05LR03MLMD00	36W (51Vf)	700mA	90%	0.95	<3%	220-240V	147x44x30 mm	5A 50µS	50 pcs
PSU50W 700mA Dali / 1-10V&Push	05MM03MLMF00	50W (72Vf)	700mA	89%	0.95	<3%	220-240V	124x79x22 mm	10A 200µS	30 pcs

## INSTALLATION DIMMABLE CENTRAL POWER SUPPLY

Downlight including Phoenix to connection box.

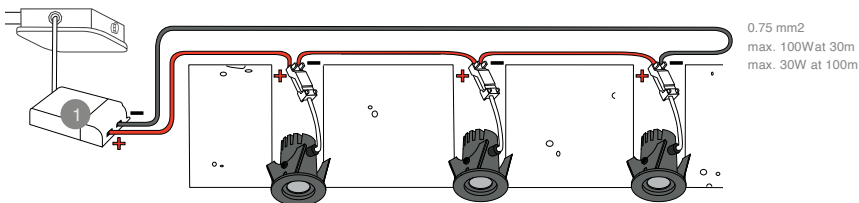

**▲ All spots should be connected in series!**

# Plug & play cables

**LV PLUG**

**EASY INSTALLATION**

Possibility to add special cables to the luminaries/power supplies. For other types of cables (not mentioned in the table) ask our sales department.


**GST18CABLING ON REQUEST**  
(See table for available versions and lengths)

## PLUG & PLAY SOLUTIONS PREFAB

See pricelist 2025 page 72

	Description	Class	Length	Item code	Length	Item code	Length	Item code
A	Euro plug incl. cable	II	0,3 m	x	2,0 m	015203BL1200	3,0 m	x
B	Schuko plug incl. cable	I	0,3 m	x	1,5 m	1C5203BLA000	3,0 m	x
C	UK plug incl. cable	II	0,3 m	x	2,0 m	0A5203BL1200	3,0 m	x
D	GST18-3male incl. cable 2x0.75mm <sup>2</sup>	II	0,3 m	455203BL0000	2,0 m	x	3,0 m	455203BL1500
E	GST18-3male incl. cable 3x0.75mm <sup>2</sup>	I	0,3 m	4A5203BL0000	2,0 m	x	3,0 m	4A5203BL1500
F	1-10V/Dali GST18-5male incl. cable 4x0.75mm <sup>2</sup>	II	0,3 m	655203BL0000	2,0 m	x	3,0 m	655203BL1500
G	1-10V/Dali GST18-5male incl. cable 5x0.75mm <sup>2</sup>	I	0,3 m	6A5203BL0000	2,0 m	x	3,0 m	6A5203BL1500
H	1-10V/Dali BST14imale incl. cable	III	0,5 m	095203BL0000	2,0 m	x	3,0 m	095203BL1500
I	GST18-3T-splitter male incl. cable	II	0,2 m	459203BL0000	2,0 m	x	3,0 m	x
G	GST18-3T-splitter male incl. cable	I	0,2 m	4A9203BL0000	2,0 m	x	3,0 m	x
H	GST18-5T-splitter male	I / II	x	659203BU0000	2,0 m	x	3,0 m	x
I	1-10V/Dali BST14iT-splitter male incl. cable	III	0,2 m	099203BL0000	2,0 m	x	3,0 m	x
J	LV plug to RJ45 plug	III	0,2 m	675205BL0000	2,0 m	x	3,0 m	x

# Choose your LV lumen output

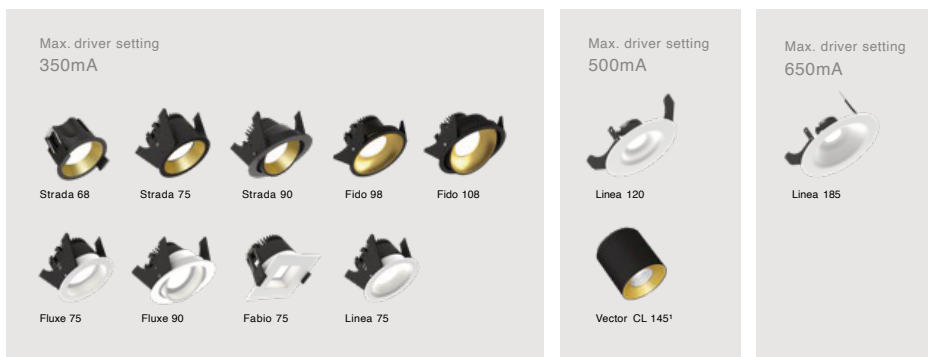

## CRI97 STANDARD



	MA	W	LUMEN OUTPUT			LUMEN / WATT			DRIVERTYPES				
			2700K	3000K	4000K	2700K	3000K	4000K	NO DIM	TRIAC	1-10V&PUSH	DALI	CASAMBI
Special request	125	5.0	475	500	525	95	100	105	127570	x	x	x	x
Special request	150	6.1	550	575	625	91	95	103	CC21W150-500	x	x	x	x
Special request	200	8.1	700	750	825	86	93	102	CC21W150-500	x	x	x	x
Special request	250	9.8	850	900	1000	87	92	102	CC21W150-500	x		127576 <sup>2</sup>	x
Special request	300	12.0	1050	1100	1200	88	92	100	CC21W150-500	x	125400	127576 <sup>2</sup>	127630
Standard	350	13.8	1150	1250	1350	83	91	98	CC21W150-500	127030	125400	127576 <sup>2</sup>	127630
Special request	400	15.8	1300	1425	1550	82	90	98	CC21W150-500	x	125400	127576 <sup>2</sup>	127630
Special request	450	18.0	1475	1600	1750	82	89	97	CC21W150-500	x	125400	127576 <sup>2</sup>	127630
Standard	500	20.1	1625	1800	1925	81	89	96	CC21W150-500	127032	125400	127576 <sup>2</sup>	127630
Vector CL145	500	20.1	1625	1800	1925	81	89	96	122198	x	125400	123403 <sup>1</sup>	x
Special request	550	21.7	1750	1900	2050	80	87	94	CC30W350-700	x	126421	127576	127630
Special request	600	23.9	1900	2050	2225	80	86	93	CC30W350-700	x	126421	127576	127630
Standard	650	26.0	2050	2250	2400	79	86	92	CC30W350-700	x	126421	127576	127630

<sup>1</sup>For other current settings check the TCI website or ask our sales department. <sup>2</sup> Strada 75/90: eldoLED ECO240A.

## CRI82 STANDARD

	MA	W	LUMEN OUTPUT			LUMEN / WATT			DRIVERTYPES				
			2700K	3000K	4000K	2700K	3000K	4000K	NO DIM	TRIAC	1-10V&PUSH	DALI	CASAMBI
Special request	125	4.5	625	650	675	140	145	151	127570	x	x	x	x
Special request	150	5.4	750	775	800	139	144	149	CC21W150-500	x	x	x	x
Special request	200	7.2	1000	1025	1050	139	142	145	CC21W150-500	x	x	x	x
Special request	250	9.1	1225	1250	1275	135	139	140	CC21W150-500	x		127576 <sup>2</sup>	x
Special request	300	11.0	1450	1500	1525	132	137	139	CC21W150-500	x	125400	127576 <sup>2</sup>	127630
Standard	350	12.9	1650	1725	1750	128	134	136	CC21W150-500	127030	125400	127576 <sup>2</sup>	127630
Special request	400	15.6	1900	1975	2000	122	126	128	CC21W150-500	x	125400	127576 <sup>2</sup>	127630
Special request	450	17.8	2075	2150	2175	116	120	122	CC21W150-500	x	125400	127576 <sup>2</sup>	127630
Standard	500	19.7	2250	2325	2350	114	118	120	CC21W150-500	127032	125400	127576 <sup>2</sup>	127630
Vector CL145	500	19.7	2250	2325	2350	114	118	120	122198	x	125400	123403 <sup>1</sup>	x
Special request	550	22.3	2450	2550	2575	110	114	115	CC30W350-700	x	126421	127576	127630
Special request	600	24.7	2650	2750	2775	107	111	112	CC30W350-700	x	126421	127576	127630
Standard	650	27.3	2750	2875	2900	101	105	106	CC30W350-700	x	126421	127576	127630

<sup>1</sup>For other current settings check the TCI website or ask our sales department. <sup>2</sup> Strada 75/90: eldoLED ECO240A.

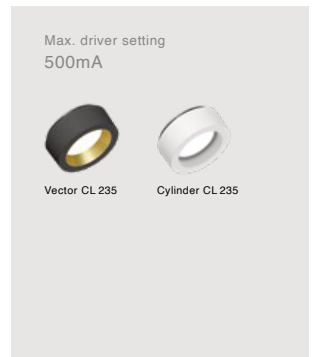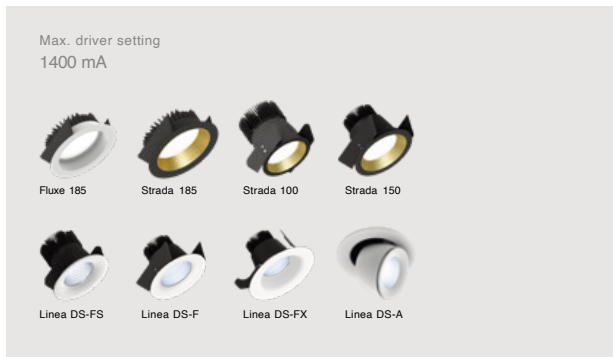

## CRI97 STANDARD

	MA	W	LUMEN OUTPUT		LUMEN / WATT		DRIVERTYPES					
			3000K	4000K	3000K	4000K	NO DIM	TRIAC	1-10V&PUSH	DALI	CASAMBI	
Special request	250	9.4	800		85		CC21W150-500	x	126421	127576	x	
Special request	350	132	1100		83		CC21W150-500	x	127021	127576	127630	
Cylinder / Vector 235	500	179	1450		81		CC21W150-500	127032	123400	127576	127630	
Special request	500	179	1450		81		CC21W150-500	127032	127021	127576	127630	
Special request	700	27.0	2150		80		CC30W350-700	122260	127021	127576	127630	
Standard	800	32.1	2500		78		127484	on request	127021	127490	127630	
Special request	900	35.5	2700		76		127484	on request	127021	127490	127630	
Special request	1050	41.7	3000		72		127484	on request	127021	127490	127630	
Standard	1200	50.5	3250 <sup>1</sup>		64		127690	on request	123170	123170	On request	
Special request	1400	57.2	3750 <sup>2</sup>		66		x	on request	123170	123170	On request	

<sup>1</sup>For large downlights CRI97 No dim. <sup>2</sup>For large downlights CR97 1-10Vand Dalı

## CRI82 STANDARD

	MA	W	LUMEN OUTPUT				LUMEN / WATT		DRIVERTYPES				
			3000K	4000K	3000K	4000K	3000K	4000K	NO DIM	TRIAC	1-10V&PUSH	DALI	CASAMBI
Special request	250	9.2	1350	1400	147	152	CC21W150-500	x	126421	127576	x		
Special request	350	13.1	1850	1900	141	145	CC21W150-500	x	127021	127576	127630		
Cylinder / Vector 235	500	194	2525	2600	130	134	CC21W150-500	127032	123400	127576	127630		
Special request	500	194	2525	2600	130	134	CC21W150-500	127032	127021	127576	127630		
Standard	700	27.9	3575	3650	128	131	CC30W350-700	122260	127021	127576	127630		
Special request	800	32.4	3825	4050	118	125	127484	on request	127021	127490	127630		
Special request	900	36.8	4300	4500	117	122	127484	on request	127021	127490	127630		
Special request	1050	43.7	4900	5100	112	117	127484	on request	127021	127490	127630		
Standard	1200	51.2	5550	5800	108	113	127690	on request	123170	123170	On request		

## HIGH CRI LED OPTIONS

	CCT	CRI	R9	RF	RG	DOWNLIGHTS SMALL			DOWNLIGHTS LARGE			DOWNLIGHTS LARGE		BRAND	ITEM CODE
						MA	LM	LM/W	MA	LM	MA	LM			
CR182	2700K	82	5	83	94	350	1650	128	700	3400	1200	5300	Bridgelux	kxf	51-4087-27
CR182	3000K	82	7	86	95	350	1725	134	700	3575	1200	5550	Bridgelux	kxf	51-4087-30
CR182	4000K	82	18	84	96	350	1750	136	700	3650	1200	5800	Bridgelux	kxf	51-4087-40
CR190	2700K	92	67	88	104	350	1550	118	700	3150	1200	4700	Bridgelux	kxf	51-4088-27
CR190	3000K	92	67	92	99	350	1600	122	700	3250	1200	4850	Bridgelux	kxf	51-4088-30
CR190	4000K	92	78	92	100	350	1625	124	700	3300	1200	4925	Bridgelux	kxf	51-4088-40
CR197	2700K	97	93	96	103	350	1150	83	800	2300	1400	3425	Lumileds		50-3031-27
CR197	3000K	97	96	95	103	350	1250	91	800	2500	1400	3750	Lumileds		50-3031-30
CR197	4000K	97	96	95	103	350	1350	98	800	2700	1400	4050	Lumileds		50-3031-40

## Cortina 2L



Cortina 2L 595x595  
620x620



Cortina 2L 1195x295



Cortina 2L 1720x100

	MA	W	LUMENOUTPUT		LUMEN / WATT		UGR		DRIVERTYPES			
			3000K	4000K	3000K	4000K	3000K	4000K	NO DIM	1-10V&PUSH	DALI	CASAMBI
Special request	500	19,0	2600	2700	137	142	175	176	127570	127021	127576	127630
Standard	700	27,1	3500	3700	129	137	185	187	CC30W350-700	127021	127576	127630
Special request	900	35,4	4400	4600	124	130	193	195	127484N	127021	127490	127630
Standard	1050	41,8	5050	5300	121	127	198	20,0	127484N	127021	127490	127630
Special request	1200	48,4	5700	5950	118	123	20,2	20,4	127680	123170	123170	x

## Linesa 2L



Linesa 2L 595x595  
620x620

	MA	W	LUMENOUTPUT		LUMEN / WATT		UGR		DRIVERTYPES			MA	LM	DRIVERTYPES	
			3000K	4000K	3000K	4000K	3000K	4000K	NO DIM	1-10V&PUSH	DALI			2700-6500K	DALI
Special request	350	16,6	2350	2450	142	148	126	128	127570	126421	127576	2x350	1650	x	x
Standard	500	23,8	3300	3450	139	145	138	140	127570	126421	127576	2x500	2350	On request	On request
Special request	600	28,6	3950	4100	138	143	14,4	14,6	127480N	126421	127490	2x600	2800	On request	On request
Standard	700	33,6	4550	4750	135	141	14,9	15,1	127480N	126421	127490	2x750	3450	DL562/A	DL562/A-C
Special request	900	43,5	5800	6000	133	138	15,8	15,9	122204	On request	ECO560A	2x900	4200	On request	On request
Special request	1050	51,0	6500	6750	127	132	16,2	16,3	122204	On request	ECO560A	2x1050	4900	On request	On request

# Trackspots



Max 1400mA

Odion XS

## CRI97 STANDARD

	MA	W	LUMEN OUTPUT		LUMEN / WATT		DRIVERTYPES			
			3000K	4000K	3000K	4000K	NO DIM	DALI	CASAMBI	
Special request	500	179	1450		81			On request	PRO-T61050N	GA
Standard	700	27.0	2150		80			On request	PRO-T61050N	GA
Special request	800	32,1	2500		78			On request	PRO-T61050N	GA
Special request	900	35,5	2700		76			OT FIT 40	PRO-T61050N	GA
Standard †	1050	41,7	3000		72			OT FIT 40	PRO-T61050N	GA
Standard	1200	50,5	3250		64			SC60W1100-1400CG	On request	On request
Special request	1400	57,2	3750		66			SC60W1100-1400CG	On request	x

## CRI82 STANDARD

	MA	W	LUMEN OUTPUT		LUMEN / WATT		DRIVERTYPES			
			3000K	4000K	3000K	4000K	NO DIM	DALI	CASAMBI	
Special request	500	194	2525	2600	130	134	GA-016		PRO-T61050N	GA
Standard	700	27,9	3575	3650	128	131	GA-016		PRO-T61050N	GA
Special request	800	32,4	3825	4050	118	125	GA-016		PRO-T61050N	GA
Special request	900	36,8	4300	4500	117	122	GA-016		PRO-T61050N	GA
Special request	1050	43,7	4900	5100	112	117	GA-016		PRO-T61050N	GA
Standard	1200	51,2	5550	5900	108	113	SC60W1100-1400CG		On request	On request

# Trackspots



Max. 800mA

Linea AS-XS

## CRI97 STANDARD


	MA	W	LUMEN OUTPUT		LUMEN / WATT		DRIVERTYPES			
			3000K	4000K	3000K	4000K	NO DIM	DALI	CASAMBI	
Special request	500	179	1450		81			GA-016	PRO-T61050N	GA
Standard	700	27,0	2150		80			GA-016	PRO-T61050N	GA
Standard	800	32,1	2500		78			GA-016	PRO-T61050N	GA

## CRI82 STANDARD

	MA	W	LUMEN OUTPUT		LUMEN / WATT		DRIVERTYPES			
			3000K	4000K	3000K	4000K	NO DIM	DALI	CASAMBI	
Special request	500	194	2525	2600	130	134	GA-016		PRO-T61050N	GA
Standard	700	27,9	3575	3650	128	131	GA-016		PRO-T61050N	GA
Special request	800	32,4	3825	4050	118	125	GA-016		PRO-T61050N	GA

# Tailor-made lighting

We have introduced a new name for our  
custom-made businessunit;

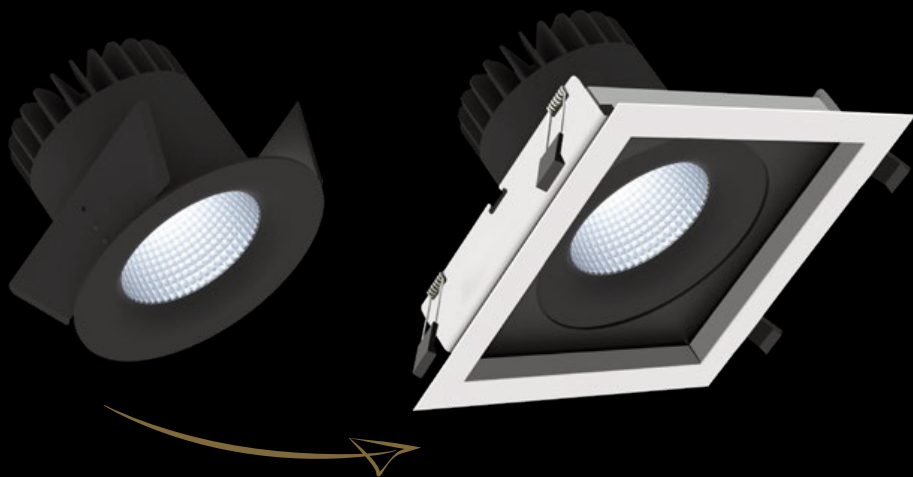

# MIYO

Make it your own.

## UNIQUE IN EVERYWAY

Could our product range match your requirements better? We will always gladly suggest a suitable product for your needs. We can make simple adjustments to existing features such as colour or size. However, we are open to more complex challenges too. We design fixtures specifically tailored to your requirements.

The luminaires from our collection are tailor-made assembled in our social and in-house workshops. We do this in the Netherlands. This enables us to choose from an extensive stock of lighting components.

## LET'S BE CREATIVE

Any of our existing parts can be used when creating a brand new design. Should special parts be required, we can quickly and easily have them made by our large network of suppliers.

As a result of this approach we are able to offer a complete package. There is a wide choice of assorted and custom made products at competitive prices.



Just give us a call  
**+31(0)85 773 63 60**



Minimum order  
of 50 units



Within 48 hrs  
go or no go



Average delivery  
time is 6 weeks



## Why MIYO?

At Illuxtron we are creating standard products that are competitive and innovative for a wide audience. We create our own parts and technologies for our luminaires. But sometimes you need something more, something different... Something special. That's where MIYO comes in.



### MAKE IT YOUR OWN! (MIYO)

We solve customer problems by making customised luminaires. MIYO can do that competitively because we try to use as many existing Illuxtron components as possible. We pick and combine and only have to make what we don't have in stock.



### WHY WE ARE GOOD AT IT

At Illuxtron we assemble our luminaires locally. The biggest advantage is that we can customize the product without having to disassemble first. And we have local partners to quickly solve specific customer problems.

- We can do powder coating at the end of the street
- There is a CNC metalworking company in the same building
- Our sheet metal partner is 1 hour away from us
- The social workshop is a 10 minute walk away


This gives us Flexibility and Speed!



# How does it work?

Here is an example of our tailor-made nursery luminaire. This luminaire was specifically designed for a baby room concept. Small children would easily become dazzled by a direct ceiling light when they are lying on their backs. As a solution, we developed a luminaire that can be adjusted to illuminate the walls. Indirect light means less stimuli, and thus more relaxed babies.

The HV-FD technology is also capable of very deep dimming. This is perfect for parents who want to check on their babies in the middle of the night without waking them up.

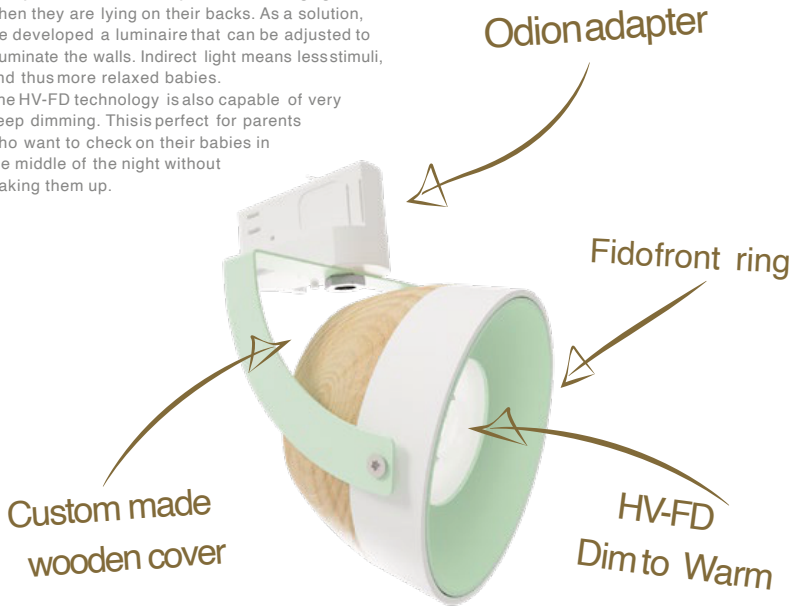

This light fixture blends in well with the trendiest and friendliest nurseries thanks to the wooden accent ring and the green paint. The adjustable luminaire is also ideal for creating a cosy, pleasant atmosphere in your living room or retail space.

**MIYO**  
Make it your own.

Let 's be creative!



Minimum order  
of 50 units




Within 48 hrs  
go or no go



Average delivery  
time is 6 weeks

Just give us a call  
+31(0)85 773 63 60

# Examples of "making it your own"

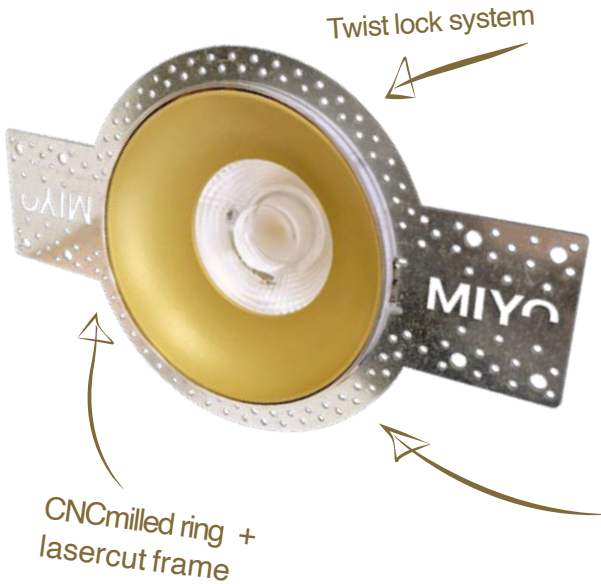

## TRIMLESS FIDO

The standard Fido version has been transformed into a trimless version for Gyproc ceilings.

Standard Fido+  
bajonet ring



## GRID LIGHT

Except for the LED technology, almost everything is made from new parts. In particular, the grid to limit the longitudinal visibility was a requirement of the customer.



Tailormade aluminium tube

Flexible in making different heights



Fluxe 75

### PENDANTS

We cut the profiles to the desired length in-house. We can handle any length between 250 mm and 6 meters. We can also adjust the colour based on the project requirements.

### ODION WITH CASAMBI 2700-6500K

This tuneable Track Spot can be used in a standard 3 Phase track. Both Dale and App based Casambi control are possible. This enables both dimming and colour changing per individual luminaire.



CASAMBI



Various lengths

### FIDO TUBES

Playing around with various lengths and colours to create architectural shapes that have a distinctive aesthetic. We can cut the tube to a variety of lengths.

Fido

MIYU

Make it your own.



# Datacenter specials

## LINEAR LINE


Special energy-efficient luminaire aimed at data centers. It can be mounted directly on a cable duct via a handy suspension system. As a possible pendant variant, it can also be attached to the ceiling with hanging wires.

*Both can be connected the same way*




## EMERGENCY LUMINAIRE

Stand alone IP65 luminaire with wide beam and 318Lm for 3hrs. Can be connected in the same way as the Linear Line to a cable trunking.

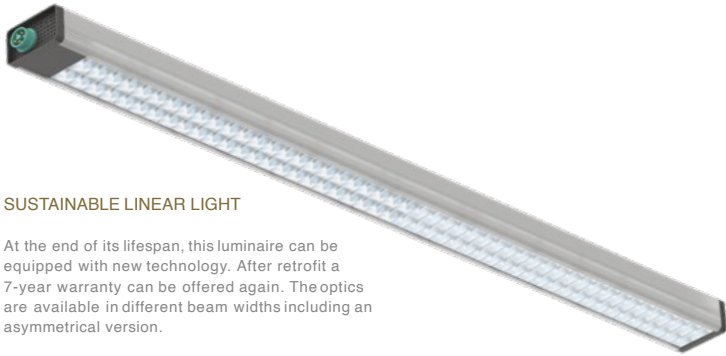

### SUSTAINABLE LINEAR LIGHT

At the end of its lifespan, this luminaire can be equipped with new technology. After retrofit a 7-year warranty can be offered again. The optics are available in different beam widths including an asymmetrical version.

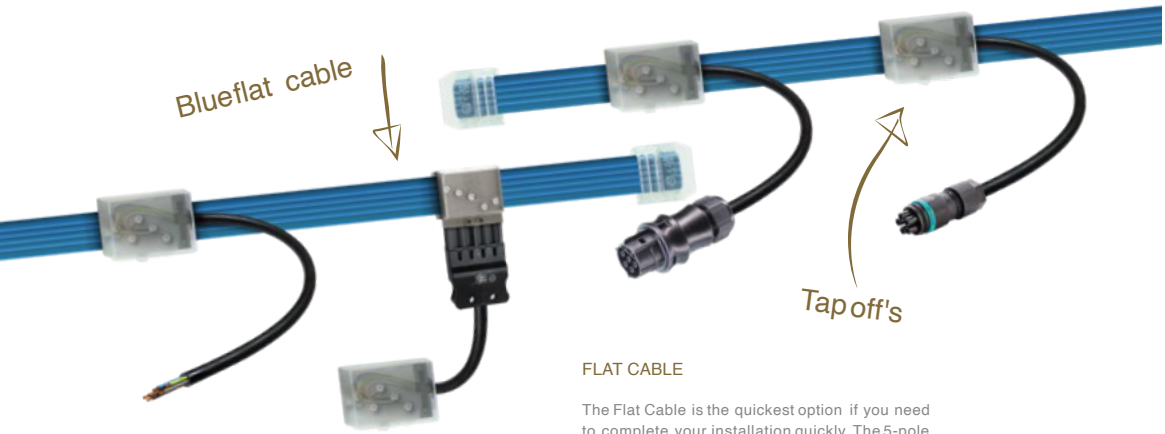

### FLAT CABLE

The Flat Cable is the quickest option if you need to complete your installation quickly. The 5-pole tap off's can be assembled by Illuxtron at any location and any length you desire.



### ODION SPOT

A cable basket holds the Odion Trackspot's head in place. It is a cheap way to light up your (industrial) project with a lumen output of 6300Lm.

**MIYU**  
Make it your own.

# Recommended dimmer list Illuxtron HV-FD downlights

## DIMMING OF ILLUXTRON HV LED LUMINAIRES.

Dimming of LED luminaires can be a tricky business. There are no standards for LED dimming, there is no guarantee that any luminaire will work with any dimmer. Incompatibility between luminaires and dimmers can cause flickering, reduced dimming ranges, and can even cause damage and reduce the life span of the luminaire or the dimmer.

One general problem with LED luminaires is the occurrence of flickering. Illuxtron downlights do not flicker by themselves! They are not sensitive to most kinds of pollution present in electric power grids, such as harmonics and RCS signals. In combination with a dimmer, flickering can still occur for 3 main reasons:

1. The dimmer has a minimum load of say 50 VA and there is less than 50 VA load from the luminaires. To solve this problem, select a dimmer with a lower minimum load.
2. There can be RCS signals on the power line that interfere with the dimmers' normal operation. In this particular case, select a dimmer with a built-in RCS filter or use an external RCS filter.
3. There can also be other powerline disturbances such as harmonics, which are caused by heavy motor drives or electric car chargers.

If filtering the power line is not effective enough, you can also use a UPS with a sinewave output to supply power to the light group.

Sometimes glowing can occur, even when the dimmer is turned off. This is mostly caused by current leakage through the dimmer. Workarounds for this are so-called dimmer compensators (e.g. Niko 310-0500X) which are connected in parallel over the luminaires.

Illuxtron HV LED downlights are different from general high voltage driverless LED luminaires. We offer some advantages over other HV LED downlights

Our HV downlights will not behave as a capacitive load. Through a special patented electronic circuit, they behave like a resistive load. This means the switching of the dimmer will not cause peak currents.

This has two major advantages:

- The maximum number of downlights that may be connected to a dimmer is only limited by the VA rating of the dimmer because there are no peak currents that affect the dimming behaviour.
- Generally speaking, there is no need to use special LED dimmers or trailing edge settings on a universal dimmer. E.g. an RL type leading edge dimmer (Feller 40600) works well with our HV-FD downlights. We have tested this dimmer with a load of 30 downlights of 10W each. The only drawback can be that this kind of dimmer requires a minimum load (e.g. 40 VA).

For this reason, our recommended dimmer list is different from the list of other brands.

Over the years we have tested many dimmers with our luminaires. Test results are based on measurements in our laboratory. The recommendations in our dimmer list must be seen as a bit of advice, not a guarantee! Apart from that, dimmer manufacturers may change the dimmer's internal circuit without noticing us.

The absence of a dimmer in our list does not necessarily imply incompatibility.

If you have any questions about this, please contact our sales or R&D department.

For the latest information about our recommended dimmer list, see our website [www.illuxtron.com](http://www.illuxtron.com)

## Dimmer operation modes:

Basically, there are three kinds of dimmer operation modes:

1. Flush mounted, rotary, or push-button operated dimmers
2. Remote controlled, wireless software or smartphone-operated dimmers e.g. Zigbee, BLE, etc.
3. Remote controlled, wired, push-button operated dimmers. E.g. DIN-rail

For each of these, you will find examples in our recommended dimmer list.

As this is a rapidly developing market, we keep our dimmer list up to date on our website.

Manufacturer		Product ID	Type	Power	Neutral	RCS	Range	
Flush mounted dimmers					1)	2)	min	max
1	ABB-Busch&Jaeger	6523 UR 103	RLC	2-400	X	x	0.2	100
2	CTM Lyng	MDimLed	LED	1-200	Y	x	0.0	100
3	Gira Berker Jung	118300/I01	RL	20-500	X	?	0.0	99
4	Gira Berker Jung	118400/I01	R	60-200	X	x	0.2	97
5	Legrand	0 02671	LED	3-75	Y	?	6.3	96
6	Legrand (Btinico)	L-N-NT4411N	LED	3-75	X	?	3.4	95
7	Lumiko /Klemko	D-PAF-200-LED	RC	1-200	X	x	0.0	98
8	Lutron	RRK-R25NE-240	LED	1-250	Y	x	0.1	98
9	Niko	310-0190X	Uni	5-325	Y	✓	0.0	98
10	Niko	310-0290X	LED	3-300	X	✓	0.1	99
11	Niko	310-0390X	Uni	3-200	X	✓	0.0	95
14	Feller	40600 RL	RL	20-300	X	x	0.0	96
15	Merten	SBD SPL	RL	9-100	X	?	0.2	100
16	Merten	SBD600 RL	RL	40-600	X	x	0.0	96
17	Simon Electric	DS9T2		5-315	Y	x	0.1	100
18	Unilamp/Belid	KDT 250 E-1	LED	5-250	X	?	0.7	98
19	Unilamp/Luzense	KTD-500 E4	LED	5-500	X	x	0.4	100
Wireless remote controlled dimmers (Bluetooth, Zigbee, RF)					1)	2)	min	max
20	Casambi	CBU-TEDBluetooth	RC	1-100	Y	x	0.1	100
21	Dimmax (Trump)	420BLE	RLC	1-380	Y			
22	Eaton LED	CDAU-01/04	RLC	0-250	Y	x	2.0	100
23	RAKO	RMT-500	RC	1-500	Y	✓	0.0	100
24	RAKO	RMT-PILL	RC	1-250	Y	✓	0.1	98
Wired remote control dimmers (pulse, Din-rail etc)					1)	2)	min	max
25	Dimmax (Trump)	420SL	RLC	1-200	Y	x	2.1	98
26	Eltako	EUD61NPN-UC	RLC	400	Y	x	2.9	95
27	Niko	330-0700(=330-0701)	LED	5-350	Y	✓	0.1	100
28	Obus	Dim02SA/500	uni	2-500	Y	✓	0.1	100

1) Y =neutral required; X =no neutral required

2) x = sensitive to RCS signals e.g. flicker; ✓ = not sensitive to RCS

This list is based on measurements in a lab environment with nominal voltage, a different voltage may result in a different dimming range. Dimmer manufacturers may change the technical design of the dimmer without informing LED lamp suppliers. These changes can influence the performance of LED products. Illuxtron cannot be held responsible for inaccuracies in the compatibility lists due to technical changes in dimmers. Disclaimer: Illuxtron will not accept claims for any damage caused by implementing the recommendations in this document.

# Definitions and abbreviations

HV-FD	High Voltage Flickerfree Dimming (driverless)
LV	Low Voltage (constant current) incl. Power Supply (PSU)
LVC	Low Voltage (constant current) excl. Power Supply (PSU)
Vf	Forward Voltage (Driver required which can handle this Vf)
CS	Supplied with concrete springs to be installed in concrete or gyproc ceilings (metal only with the right thickness).See page 47.
GS	Supplied with gyproc springs to be installed in gyproc ceilings (metal only with the right thickness).See page 47.
WS	Supplied with wire springs to be installed in gyproc and metal ceilings. See page 47.
COB	Chip On Board
UGR	Unified Glare Rating
CRI	Colour Rendering Index
PIR sensor	Motion sensor
AC LED	High Voltage LEDs(230V products)
CT technology	Colour Tune technology
DIP-switch	Manual adjustable switch (Dual in Line)
IP rate	Ingress Protection rating (water and dust protection)
IK rate	Impact protection rating
Efficacy	The actual lumen output in relation to the incorporated power system
Pf	Power Factor
W	Watt
K	Kelvin
MW	Colour: white
BL	Colour: black
EMC	Electromagnetic Compatibility
Tj	Junction Temperature
Ta	Ambient Temperature
Tc	Contact Temperature
Lm	Lumen
HCL	Human Centric Lighting





Edition 20241024.

Copyright © 2024, ILLUXTRON. All rights reserved. The information in this document is subject to change without prior notice. Check our website [www.illuxtron.com](http://www.illuxtron.com) for the most recent information.

Our sales department is always at your service for any questions or for support.  
[sales@illuxtron.com](mailto:sales@illuxtron.com) • +31(0)85 773 63 60

Illuxtron International BV

Mercuriusweg 19  
4382 NC Vlissingen  
The Netherlands

[info@illuxtron.com](mailto:info@illuxtron.com)  
+31(0)85 773 63 60  
[www.illuxtron.com](http://www.illuxtron.com)



**SLIGHT®**

Chemin de la Veyre d'en haut D2

1806 St-Légier — Switzerland

+41 21 925 38 88

[www.slight.ch](http://www.slight.ch)

[info@slight.ch](mailto:info@slight.ch)

