

# SLIGHT

NEUTRAL CATALOGUE

2025

slightly different



Slight®  
slightly different







NEUTRAL MH + 360



NEUTRAL MH+



NEUTRAL MH + T60

## Right light For Retail & aisle & shelves area

The Neutral collection is a new series of products specially developed for the retail space. Compared to the traditional linear trunking system light, the Neutral uses standard European 3 circuits track, which means more flexible for compatibility, and easier for installation. Meanwhile, Neutral has the ability to meet the complex requirements of different environments with various of light distribution design.

Whether it is a long aisle environment, a general lighting place, or side wall (side shelf) area, Neutral series can be adapted easily.

Besides, the Neutral is compatible with a variety of smart dimming solutions, such as 1-10V dimming, remote-control dimming & CCT adjustment, motion sensor, and daylight sensor. Smart dimming can provide more energy savings for the retail store, and the unique CCT adjustment function can create a rich atmosphere lighting effects.

- Universal track adaptor design, compatible with multiple-brands European 3 circuit track.
- Specially developed optic design for uniform, rectangle illumination without dark dots.
- Easy for installation, convenient to position and reconfigured, flexible adaption to retail design changes.
- Various light distribution with special reflector design. Luminaire can be rotated flexibly for particular lighting requirements.
- Smart control: 1-10V dimming, remote-control dimming & CCT adjustment, motion sensor, daylight sensor are available.



## Flexible

- Can be used together with emergency lights and indicator lights, spotlights etc.
- Easy for installation, only need 3-5 seconds per lamp. Convenient to position and reconfigured, flexible adaption to retail design changes.





# NEUTRAL MH+

Technical Datasheet

**S**light®  
slightly different

# NEUTRAL MH+



Available in black and white

## Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA01-03011	27W	3510LM	130LM/W	5 Years
LTA01-04011	36W	4680LM	130LM/W	5 Years
LTA01-06011	54W	7020LM	130LM/W	5 Years

## Other Information


Input Voltage	AC220-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Fa	>80, >90	Operating Humidity Range	15-90%RH
Protection Level	IP20	Net weight	27W: 0.8Kg; 36W: 1.0Kg; 54W: 1.3Kg
Finish	Luminaire: Black, White; Track: Black, White		
Light Distribution	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension(L*W*H)	27W: 370MM*60MM*86MM    36W: 370MM*60MM*86MM    54W: 500MM*60MM*86MM		

## Dimension Diagram


27W

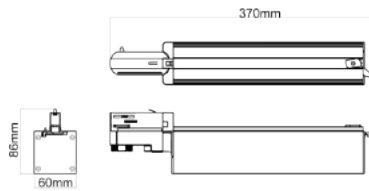

36W

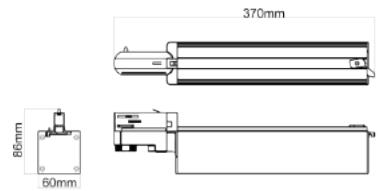

54W

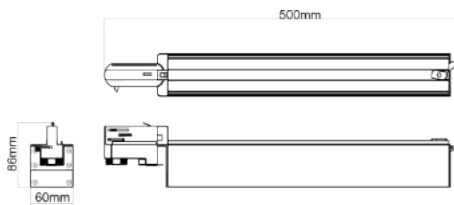

# NEUTRAL MH+

## Remote-control Dimming



Available in black and white



### Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA01-04011-D	40W	5600LM	Upto 140LM/W	5 Years

### Other Information

Input Voltage	AC100-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protection Level	IP20	Net weight	40W: 1.5Kg
Finish	Luminaire: Black, White; Track: Black, White		
Light Distribution	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension(L*W*H)	40W: 500MM*60MM*86MM		


### Dimension Diagram

40W

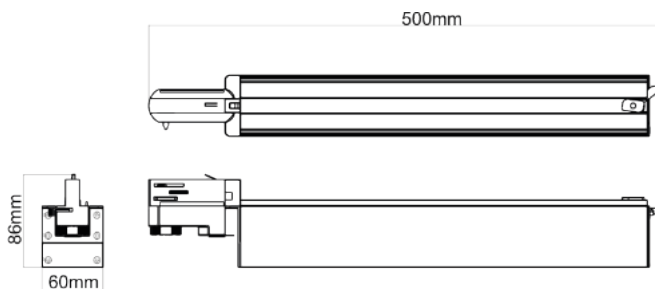

# NEUTRAL MH+

Dimming & CCT adjustable

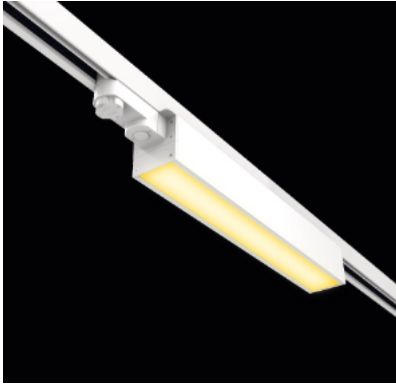

Available in black and white

## Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA01-04011-C&D	40W	5200LM @5000K	130LM/W	5 Years

## Other Information

Input Voltage	AC100-240V	Power Frequency	50/60 HZ
CCT	3000K- 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protection Level	IP20	Net weight	1.5Kg
Finish	Luminaire: Black, White; Track: Black, White		
Light Distribution	100°		
Dimension(L*W*H)	40W: 500MM*60MM*86MM		

## Dimension Diagram

40W

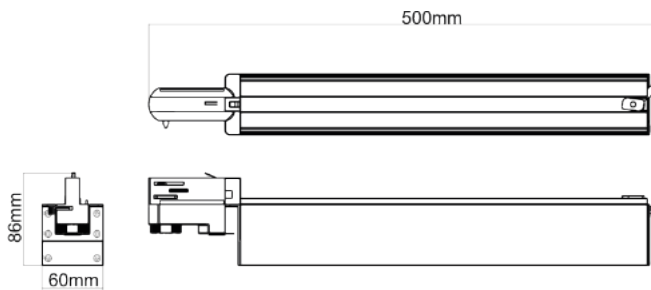

# NEUTRAL MH+

## Motion sensor



Available in black and white



### Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA01-03011	27W	3510LM	130LM/W	5 Years
LTA01-04011	36W	4680LM	130LM/W	5 Years
LTA01-06011	54W	7020LM	130LM/W	5 Years

### Other Information


Input Voltage	AC220-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protection Level	IP20	Net weight	27W: 1.0Kg; 36W: 1.2Kg; 54W: 1.5Kg
Finish	Luminaire: Black, White; Track: Black, White		
Light Distribution	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension(L*W*H)	27W: 450MM*60MM*86MM    36W: 450MM*60MM*86MM    54W: 580MM*60MM*86MM		

### Dimension Diagram


27W

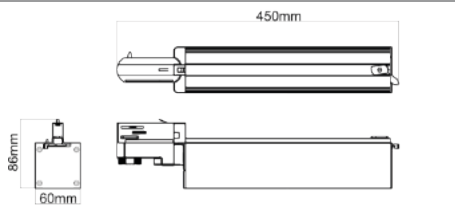


36W

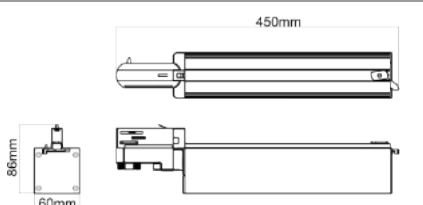


54W

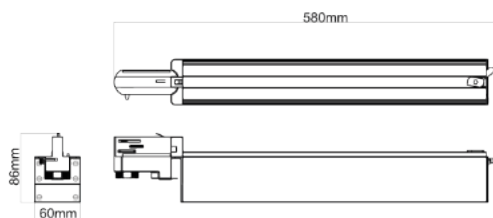

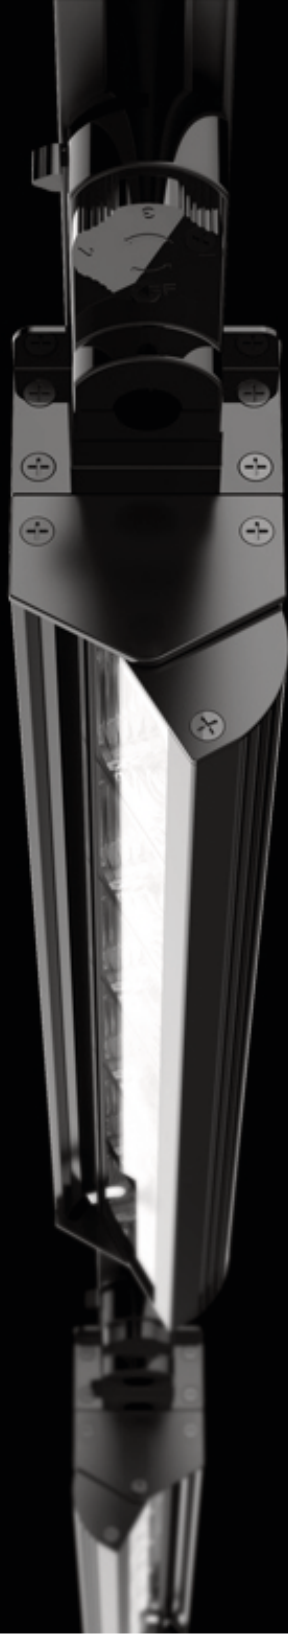

**S**light<sup>®</sup>  
slightly different

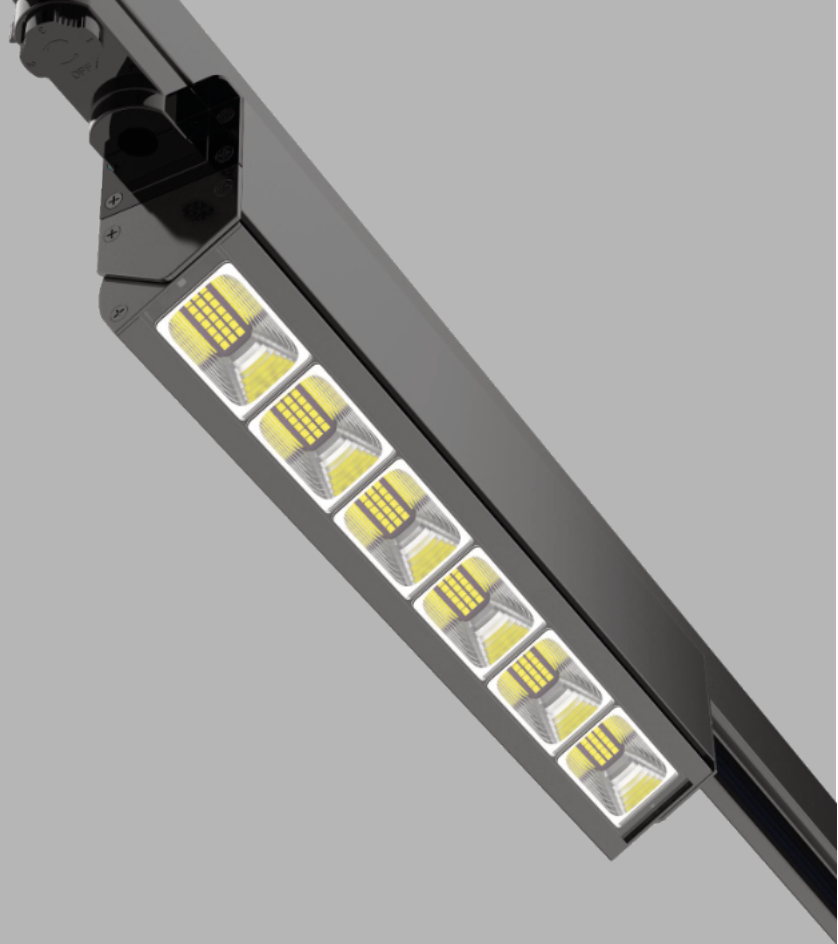

# NEUTRAL MH+ 60

## Technical Datasheet

**S**light®  
slightly different

# NEUTRAL MH+ 60



Available in black and white

## Order Informa on


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-03011	27W	3510LM	130LM/W	5 Years
LTA02-04011	36W	4680LM	130LM/W	5 Years
LTA02-06011	54W	7020LM	130LM/W	5 Years

## Other Informa on


Input Voltage	AC220-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Fa	>80, >90	Operating Humidity Range	15-90%RH
Protec on Level	IP20	Net weight	27W: 1.1Kg; 36W: 1.2Kg; 54W: 1.6Kg
Finish	Luminaire: Black, White; Track: Black, White	Adjustable angle	±60°
Light Distribu on	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension(L*W*H)	27W: 370MM*60MM*108MM    36W: 370MM*60MM*108MM    54W: 508MM*60MM*108MM		

## Dimension Diagram


27W

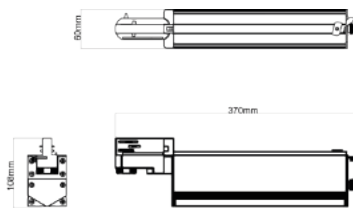

36W

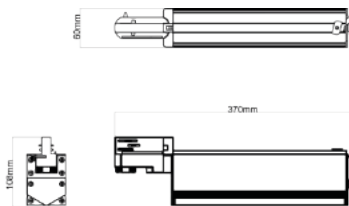

54W

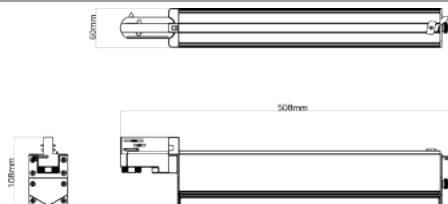

# NEUTRAL MH+ 60

## Remote-control dimming



Available in black and white



### Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-04011-D	40W	5600LM	Upto 140LM/W	5 Years

### Other Information

Input Voltage	AC100-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protection Level	IP20	Net weight	40W: 1.6Kg
Finish	Luminaire: Black, White; Track: Black, White	Adjustable angle	±60°
Light Distribution	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension(L*W*H)	40W: 508MM*60MM*108MM		

### Dimension Diagram

40W

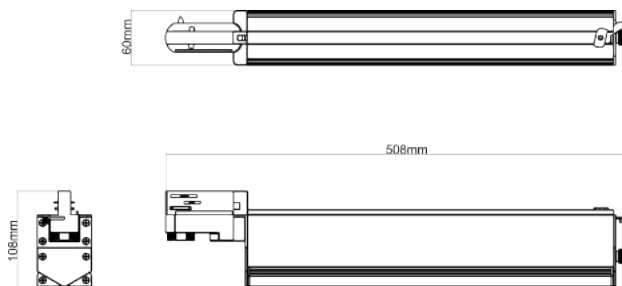

# NEUTRAL MH+ 60

Dimming & CCT adjustable



Available in black and white

## Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-04011-C&D	40W	5200LM@5000K	130LM/W	5 Years

## Other Information

Input Voltage	AC100-240V	Power Frequency	50/60 HZ
CCT	3000K-5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protection Level	IP20	Net weight	40W: 1.6Kg
Finish	Luminaire: Black, White; Track: Black, White	Adjustable angle	±60°
Light Distribution	100°		
Dimension(L*W*H)	40W: 508MM*60MM*108MM		

## Dimension Diagram

40W

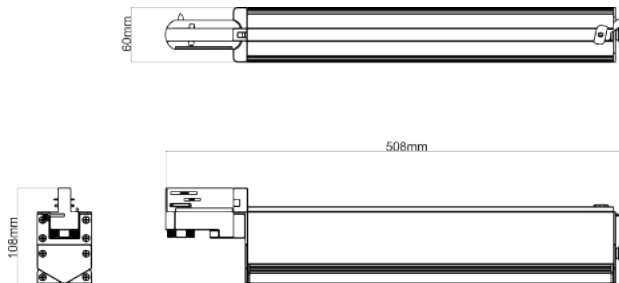

# NEUTRAL MH+ 60

Motion sensor



Available in black and white



## Order Information

Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-03011	27W	3510LM	130LM/W	5 Years
LTA02-04011	36W	4680LM	130LM/W	5 Years
LTA02-06011	54W	7020LM	130LM/W	5 Years

## Other Information


Input Voltage	AC220-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protec on Level	IP20	Net weight	27W: 1.3Kg; 36W: 1.5Kg; 54W: 1.8Kg
Finish	Luminaire: Black, White; Track: Black, White	Adjustable angle	±60°
Light Distribu on	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension(L*W*H)	27W: 450MM*60MM*108MM    36W: 450MM*60MM*108MM    54W: 588MM*60MM*108MM		

## Dimension Diagram


27W



54W

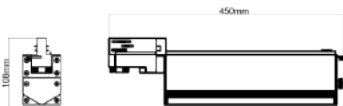

36W



# NEUTRAL MH+ 60

## Daylight sensor



Available in black and white

### Order Informa on


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-03011	27W	3510LM	130LM/W	5 Years
LTA02-04011	36W	4680LM	130LM/W	5 Years
LTA02-06011	54W	7020LM	130LM/W	5 Years

### Other Informa on


Input Voltage	AC220-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protec on Level	IP20	Net weight	27W: 1.3Kg; 36W: 1.5Kg; 54W: 1.8Kg
Finish	Luminaire: Black, White; Track: Black, White	Adjustable angle	±60°
Light Distribu on	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension(L*W*H)	27W: 370MM*60MM*108MM    36W: 370MM*60MM*108MM    54W: 508MM*60MM*108MM		

### Dimension Diagram


27W

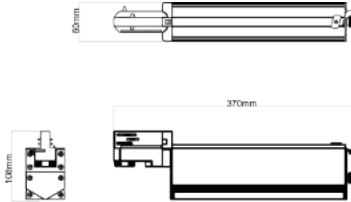


36W

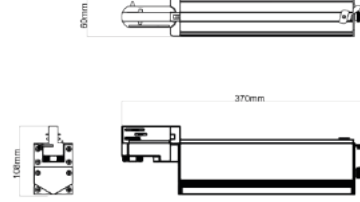

54W

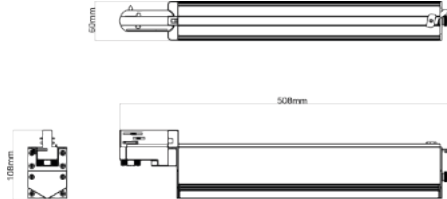

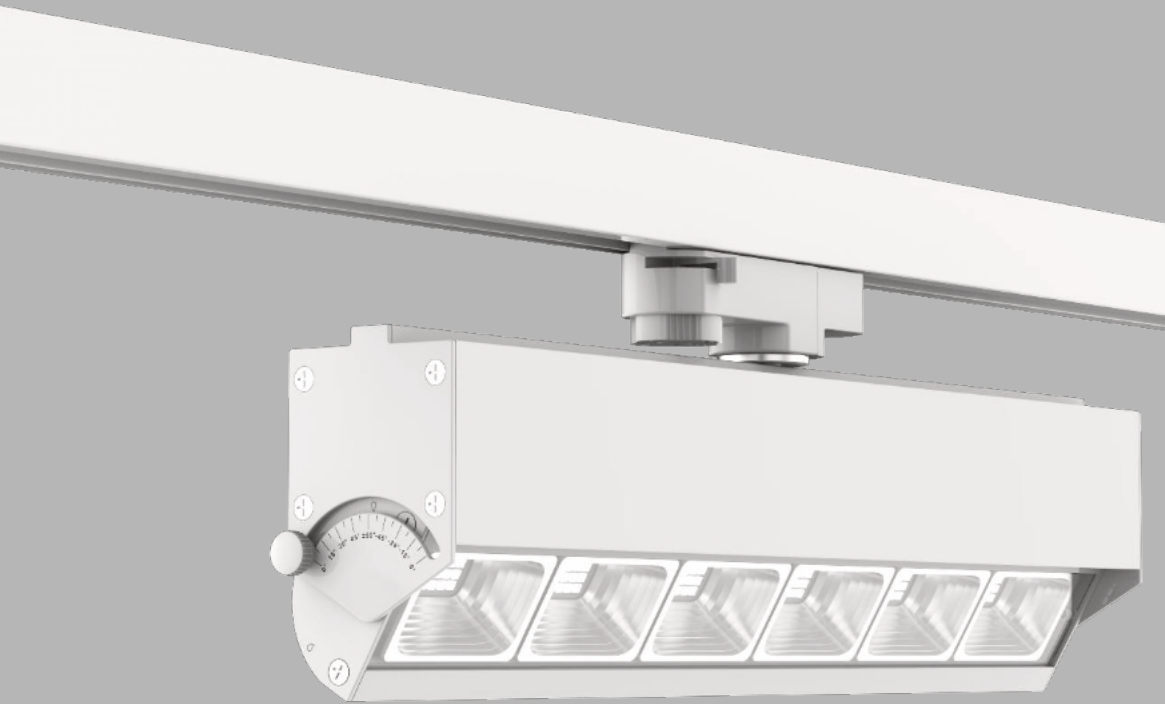

# NEUTRAL MH+ 350

## Technical Datasheet

**S**light®  
slightly different

# NEUTRAL MH+ 350



Available in black and white

## Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-03011-R350	27W	3510LM	130LM/W	5 Years
LTA02-04011-R350	36W	4680LM	130LM/W	5 Years
LTA02-06011-R350	54W	7020LM	130LM/W	5 Years

## Other Information


Input Voltage	AC220-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protect on Level	IP20	Net weight	27W: 1.1Kg; 36W: 1.2Kg; 54W: 1.6Kg
Finish	Luminaire: Black, White; Track: Black, White	Rotatable angle	Rotate through 350°, =It through ±60°
Light Distribution	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension(L*W*H)	27W: 292MM*60MM*1148MM	36W: 292MM*60MM*118MM	54W: 422MM*60MM*1148MM

## Dimension Diagram


27W

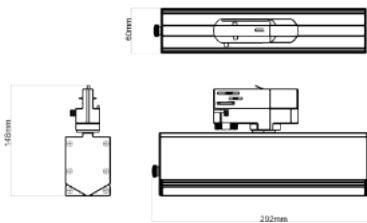

36W

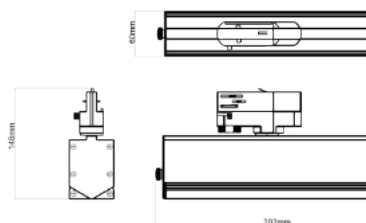

54W

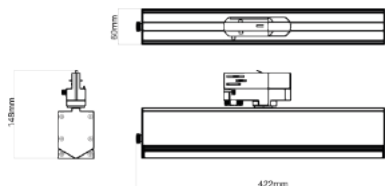

# NEUTRAL MH+ 350

## Remote-control dimming



Available in black and white



### Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-04011-R350D	40W	5600LM	Upto 140LM/W	5 Years

### Other Information

Input Voltage	AC100-240V	Power Frequency	50/60 HZ	
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°	
Ra	>80, >90	Operating Humidity Range	15-90%RH	
Protection Level	IP20	Net weight	40W: 1.6Kg	
Finish	Luminaire: Black, White; Track: Black, White	Rotatable angle	Rotate through 350°, =It through ±60°	
Light Distribution	30° X60° ; 60° X90° ; Double asymmetric; 100°			
Dimension (L*W*H)	40W: 422MM*60MM*148MM			

### Dimension Diagram

40W

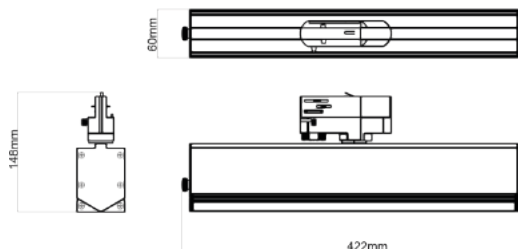

# NEUTRAL MH+ 350

Dimming & CCT adjustable



Available in black and white

## Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-04011-R350C&D	40W	5200LM (@5000K)	130LM/W	5 Years

## Other Information

Input Voltage	AC100-240V	Power Frequency	50/60 HZ
CCT	3000K-5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protection Level	IP20	Net weight	40W: 1.6Kg
Finish	Luminaire: Black, White; Track: Black, White	Rotatable angle	Rotate through 350°, ±lit through ±60°
Light Distribution	100°		
Dimension (L*W*H)	40W: 422MM*60MM*148MM		

## Dimension Diagram

40W

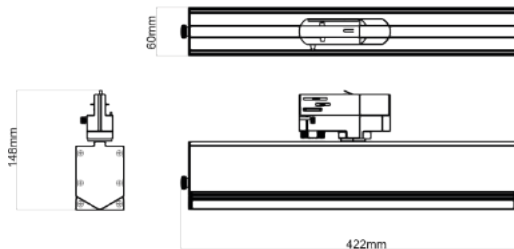

# NEUTRAL MH+ 350

Motion sensor



Available in black and white

## Order Information


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-03011-R350	27W	3510LM	130LM/W	5 Years
LTA02-04011-R350	36W	4680LM	130LM/W	5 Years
LTA02-06011-R350	54W	7020LM	130LM/W	5 Years

## Other Information


Input Voltage	AC220-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protection Level	IP20	Net weight	27W: 1.3Kg; 36W: 1.4Kg; 54W: 1.8Kg
Finish	Luminaire: Black, White; Track: Black, White	Rotatable angle	Rotate through 350°, =It through ±60°
Light Distribution	30° X60° ; 60° X90° ; Double asymmetric; 100°		
Dimension (L*W*H)	27W: 372MM*60MM*148MM    36W: 372MM*60MM*148MM    54W: 500MM*60MM*148MM		

## Dimension Diagram


27W



36W

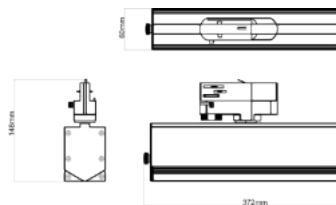


54W



# NEUTRAL MH+ 350

## Daylight sensor

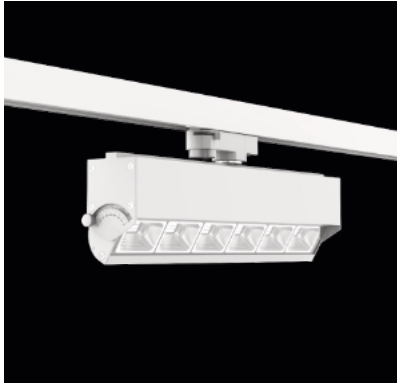

Available in black and white

### Order Informa on


Item No.	Total Power	Luminous Flux	Flux Efficiency	Warranty
LTA02-03011-R350	27W	3510LM	130LM/W	5 Years
LTA02-04011-R350	36W	4680LM	130LM/W	5 Years
LTA02-06011-R350	54W	7020LM	130LM/W	5 Years

### Other Informa on


Input Voltage	AC220-240V	Power Frequency	50/60 HZ
CCT	3000K, 4000K, 5000K	Operating Temperature Range	-40°~+50°
Ra	>80, >90	Operating Humidity Range	15-90%RH
Protec on Level	IP20	Net weight	27W: 1.3Kg; 36W: 1.4Kg; 54W: 1.8Kg
Finish	Luminaire: Black, White; Track: Black, White	Rotatable angle	Rotate through350°, =lt through±60°
Light Distribu on	30° X60° ; 60° X90° ; Double asymmetric;100°		
Dimension(L*W*H)	27W:292MM*60MM*148MM    36W:292MM*60MM*148MM    54W:422MM*60MM*148MM		

### Dimension Diagram


27W

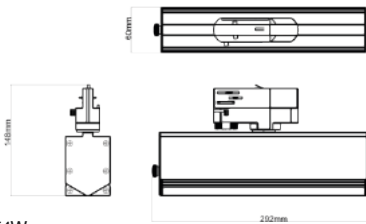

36W

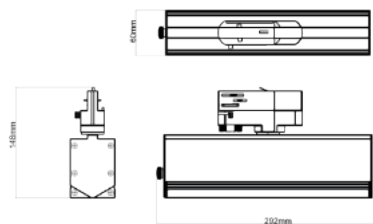



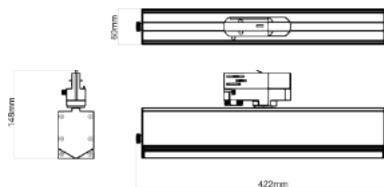


54W





Products


Light distribution


Proposal application


<p>Neutral Neutral T60 Neutral R350</p>	<p>30° X 60°</p> 	<p>Ideal for applica=ons in warehouse and supermarket shelving with high ceiling. Providing plenty of luminosity to highlight the goods, so they can be seen clearly and with ease.</p>
<p>Neutral Neutral T60 Neutral R350</p>	<p>60° X 90°</p> 	<p>Ideal for corridors, aisles and passages of hospitals, schools, office buildings, retail stores etc. It provides well-distributed illumination, neither too bright nor too dark.</p>
<p>Neutral Neutral T60 Neutral R350</p>	<p>Double asymmetric</p> 	<p>Especially designed for shelf presentation in retailing areas such as supermarket and grocery stores. Double asymmetrical light distribution, emphasizes on the shelf surfaces of both sides and ignores the less important area of the passageways.</p>
<p>Neutral T60</p>	<p>±60° adjustable</p> 	<p>Superb solution for side wall washing, and one-side shelf presentation.</p>
<p>Neutral Frosted PC cover Neutral T60 Frosted PC cover Neutral R350 Frosted PC cover</p>	<p>100°</p> 	<p>Mainly applied for general lighting in retail stores, meeting halls, supermarket, etc. It provides well-distributed light with low glare, but bright enough for work or study since it's very comfortable for the human eyes.</p>

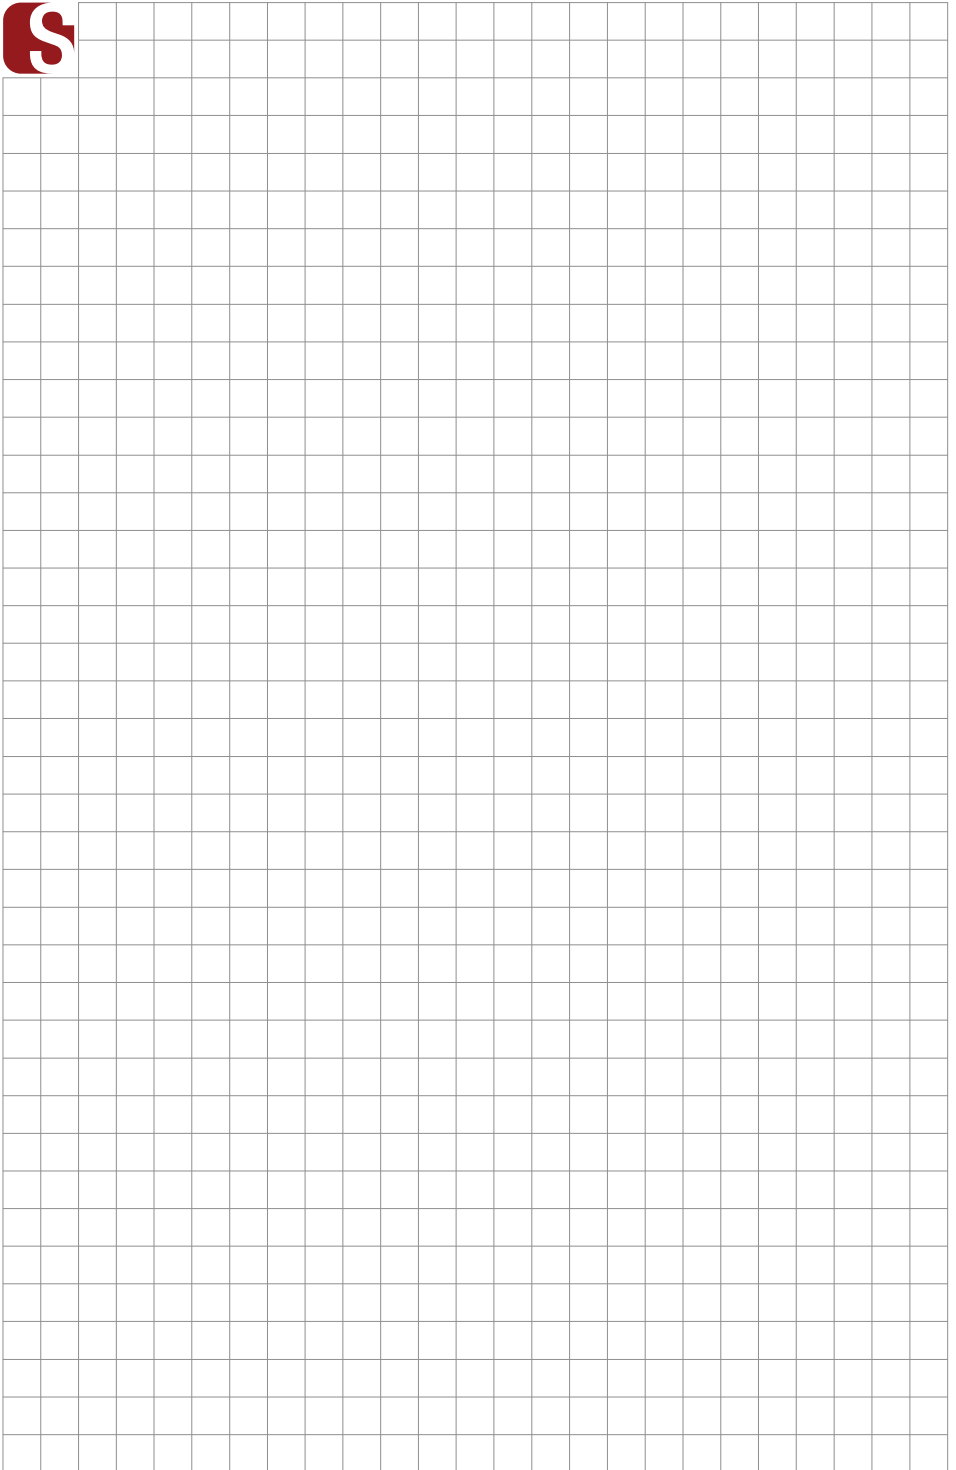


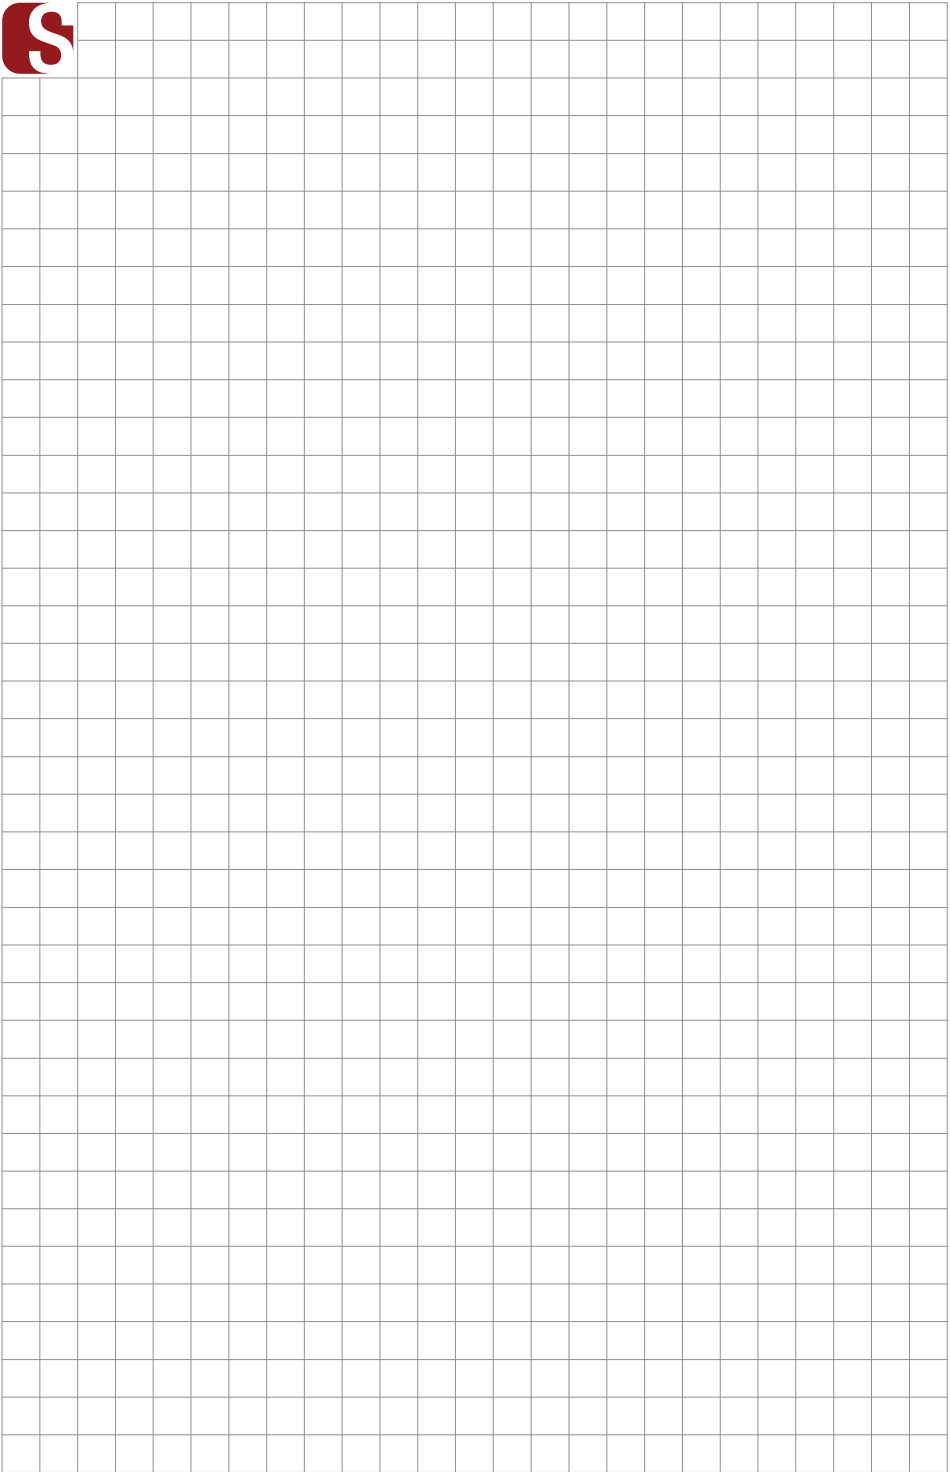

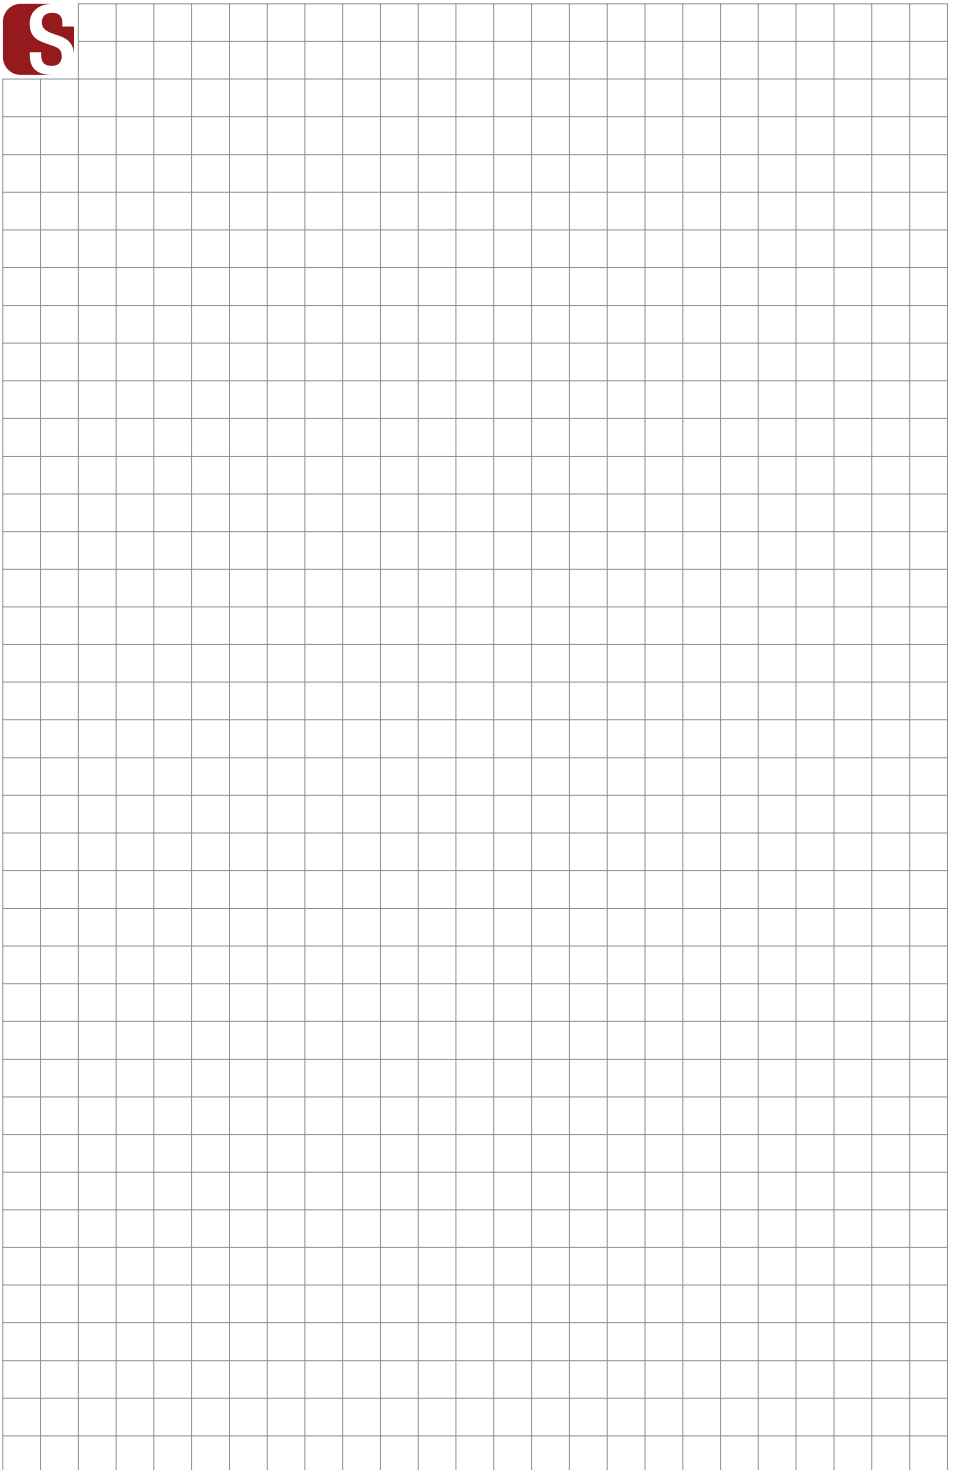

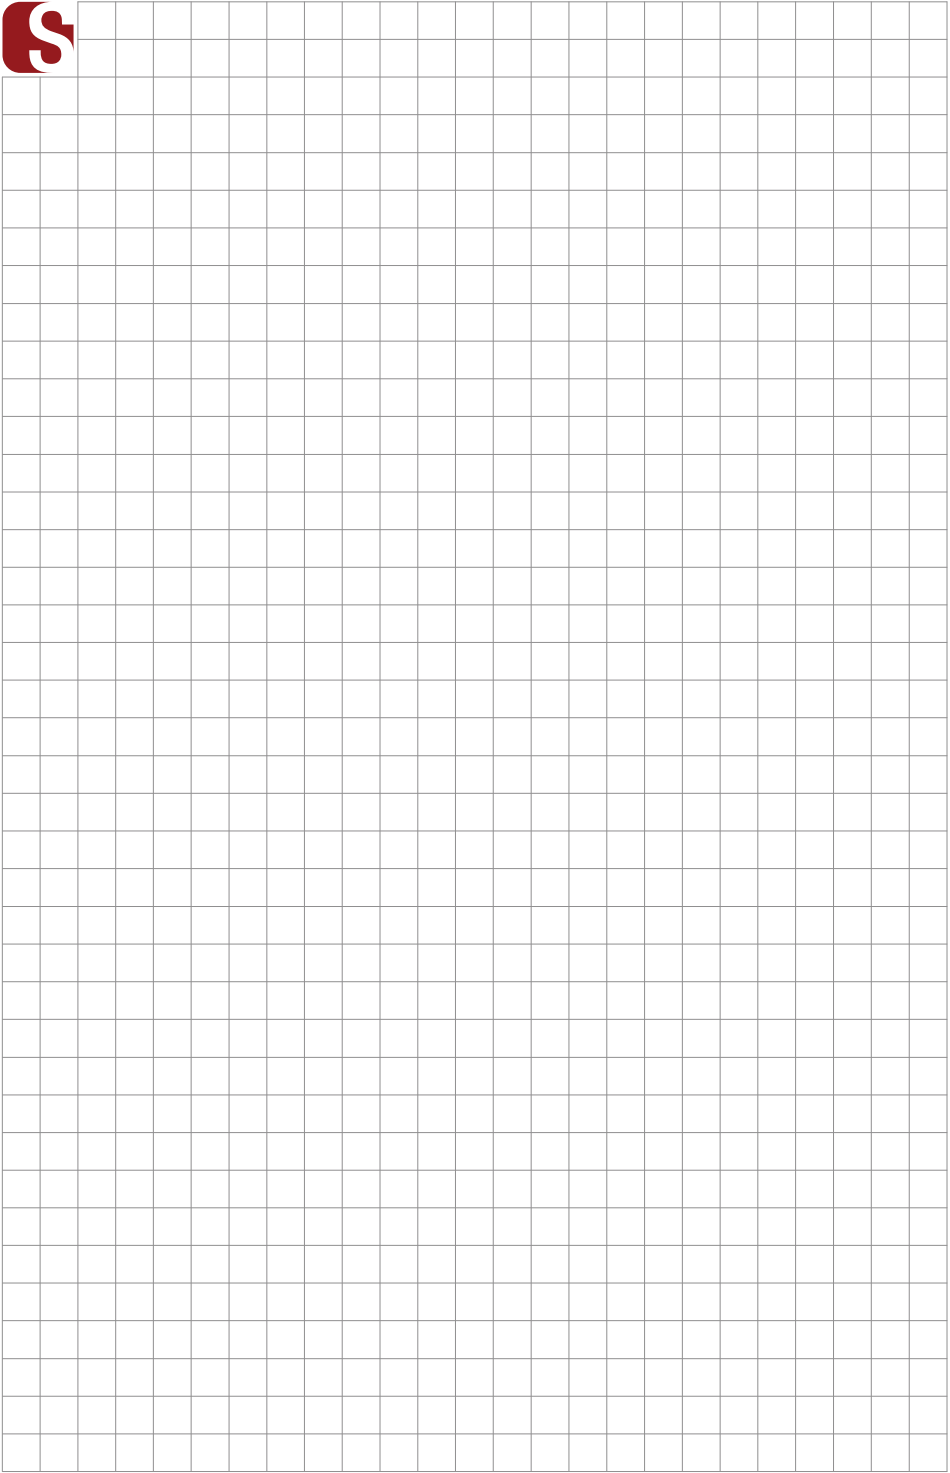

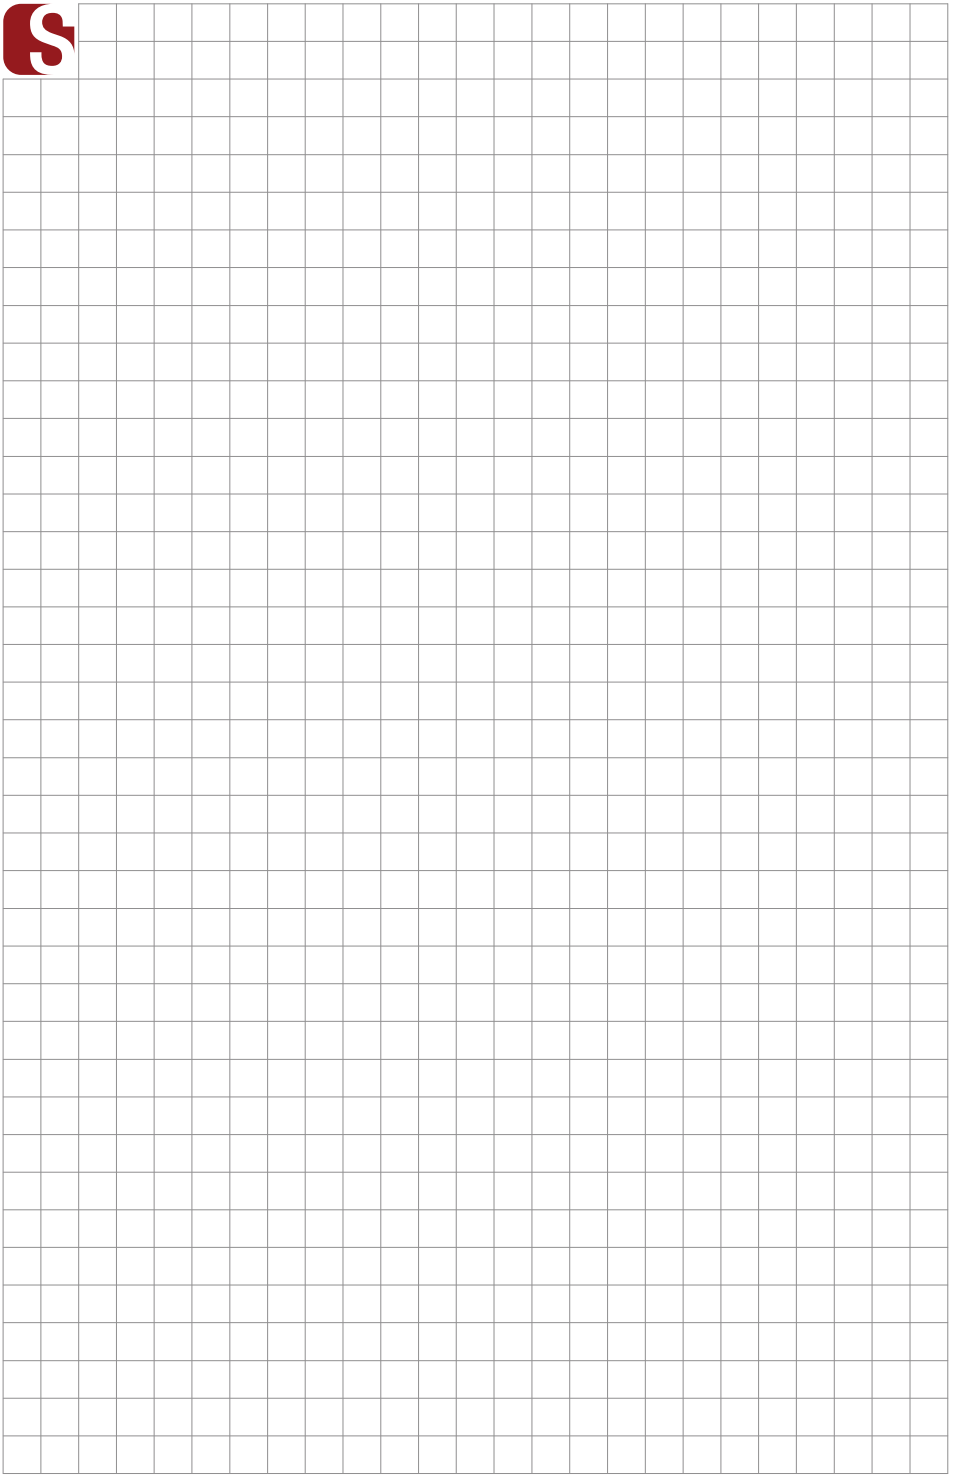

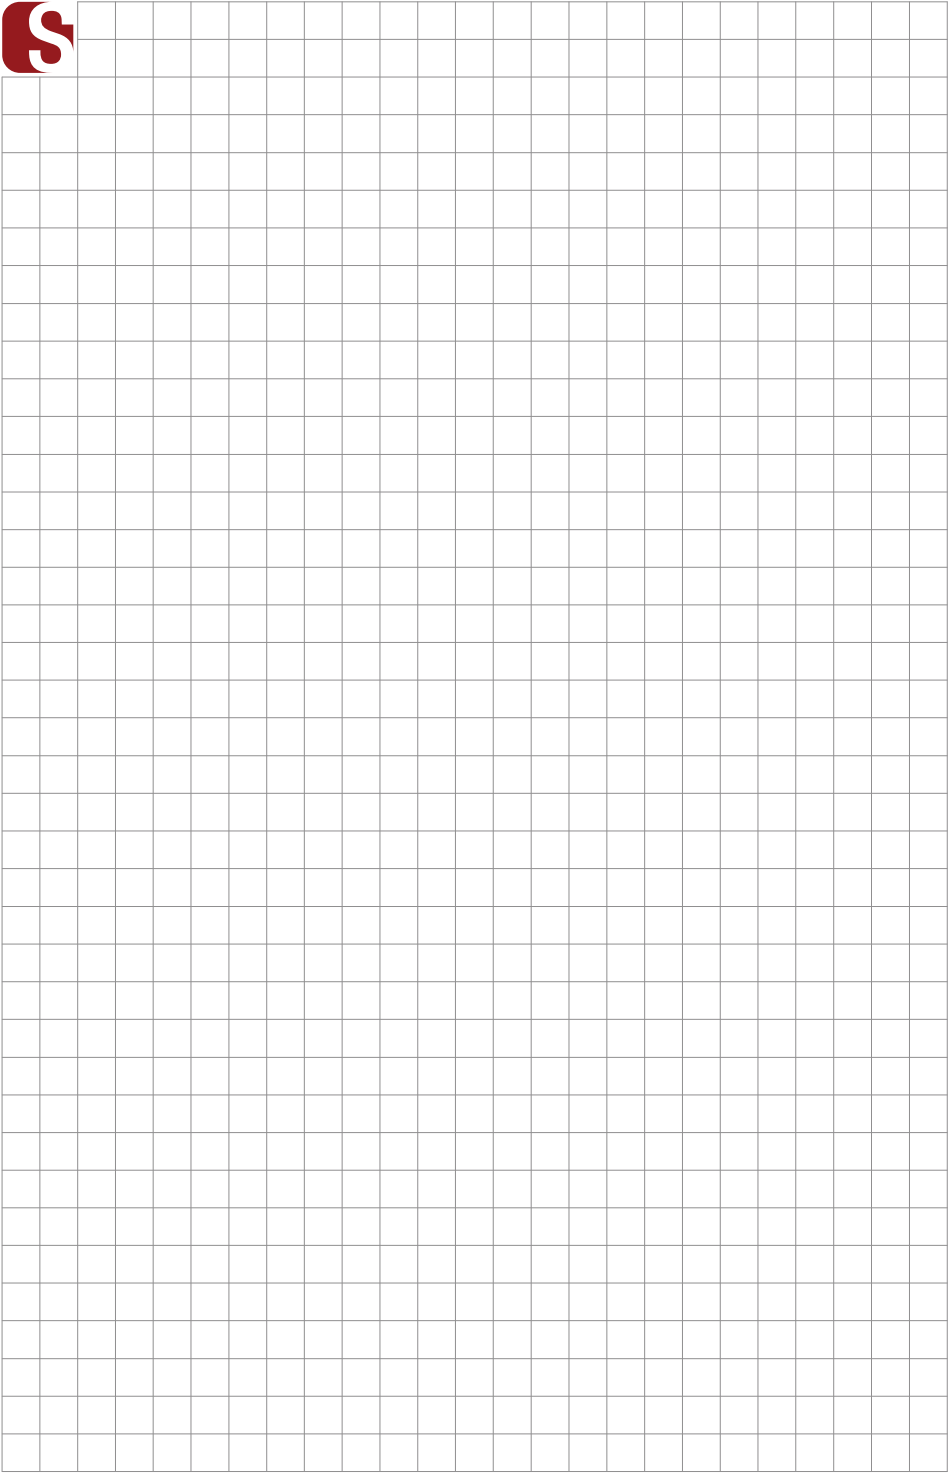



**SLIGHT®**

Chemin de la Veyre d'en haut D2

1806 St-Légier — Switzerland

+41 21 925 38 88

[www.slight.ch](http://www.slight.ch)

[info@slight.ch](mailto:info@slight.ch)

