

# SLIGHT

## OFFICE LIGHTING

2025

slightly different




**S**light<sup>®</sup>  
slightly different






# PRODUCT CODE

## SPECIFIC OFFICE LIGHTING

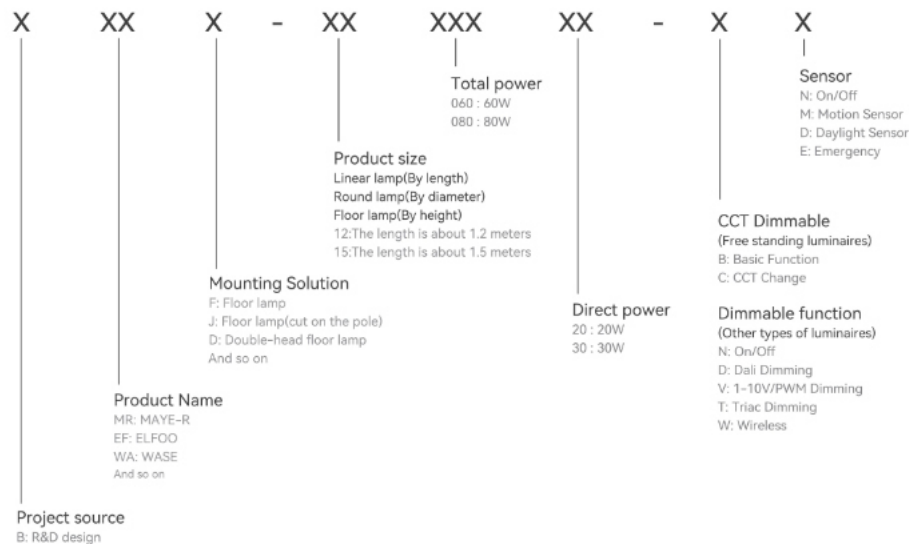

## ARCHITECTURE GARDEN LIGHTING

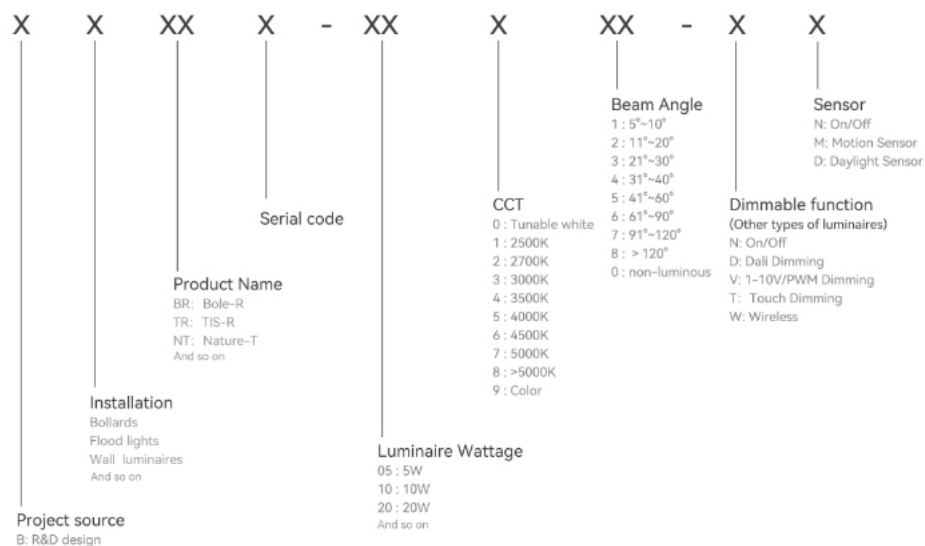

# CONTENTS

<b>01</b>	<b>SPECIFIC OFFICE LIGHTING</b> -----	<b>10</b>
	FREE STANDING LUMINAIRES -----	12
	DESK FIXED LUMINAIRES -----	64
	PENDANT LUMINAIRES -----	78
	SURFACE MOUNTED LUMINAIRES -----	116
	RECESSED LUMINAIRES -----	146
	WALL MOUNTED LUMINAIRES -----	170
<b>02</b>	<b>ARCHITECTURE GARDEN LIGHTING</b> -----	<b>180</b>
	BOLLARDS -----	182
	FLOODLIGHTS -----	200
	WALL LUMINAIRES -----	206
	CEILING LUMINAIRES -----	218
	WALL RECESSED LUMINAIRES -----	222
	TABLE LAMPS -----	228

# SPECIFIC OFFICE LIGHTING

## 01 FREE STANDING LUMINAIRES



NOVA-F1 14 NEAT-F 16 BOOK-F 18 ROMAN-F0 20 ROMAN-F1 22 ROMAN-F2 24 ROMAN-D1 26 FREE-F 28



FREE-D1 30 FREE-D2 32 ROMI-F 34 COFFEE-R 36 COFFEE-S 38 HILO 40 OFA 42 ELFOO-F 44



ELFOO-D 46 LENO-F 48 MAYE-FR 50 MAYE-FS 52 HOME C 54 HOME O 56 NITE C 58 NIT E D 60




NITE O 62

## 02 DESK FIXED LUMINAIRES




MAYE-TR 66 MAYE-TS 68 HOMET 70 NITET 72 ELFOO-T 74 LENO-T 76

## 03 PENDANT LUMINAIRES



MAYE Pro-PS 80 ROMAN-P0 82 ROMAN-P1 84 CELL-P1 86 CELL-P2 88 EZY-P 90 KEY-P 92 NIO 94



FREE-P 96 PECO 98 ROMI-P 100 ELFOO-P 102 LENO-P0 104 LENO-P1 106 LENO-P2 109 MAYE-PR 110



MAYE-PS 112 LICON-P 114

## 04 SURFACE MOUNTED LUMINAIRES



EZY-C 118 KEY-C 120 FREE-C 122 WASE-C 124 ROMI-C 126 ELFOO-C 128 ELFOO-C3 130 LICON-C 132



LENO-C1 134 LENO-C2 136 MAYE-CR0 138 MAYE-CR1 140 MAYE-CS0 142 MAYE-CS1 144

## 05 RECESSED LUMINAIRES



EZY-R 148 KEY-R 150 ELFOO-R0 152 ELFOO-R1 154 ELFOO-D2 156 ELFOO-D3 158 ELFOO-D4 160 ELFOO-D5 162



WASE-R 164 LENO-R0 166 LENO-R1 168

## 06 WALL MOUNTED LUMINAIRES



NEWA 172 LICON-W 174 MAYE-WR 176 MAYE-WS 178

## 01 BOLLARDS



BUTTON-L 184 SHOW-L 186 BOLE-M 188 BOLE-R 190 BOLE-S 194 BOLE-U 198

## 02 FLOODLIGHTS



CICA-X 202 CICA-M 202 CICA-S 204 CICA-T 204

## 03 WALL LUMINAIRES



LUNA 208 CUBE 210 TIE-R 212 TIE-S 214 NATURE-W 216

## 04 CEILING LUMINAIRES



HALO-1 220 HALO-0 220

## 05 WALL RECESSED LUMINAIRES



SAFE-S 224



SAFE-O 226

## 06 TABLE LAMPS



PUDDING 230



NATURE-T 232



## SPECIFIC OFFICE LIGHTING

---

01.



---

FREESTANDING LUMINAIRES - - - - -	12
DESK FIXED LUMINAIRES - - - - -	64
PENDANT LUMINAIRES - - - - -	78
SURFACE MOUNTED LUMINAIRES - - - - -	116
RECESSED LUMINAIRES - - - - -	146
WALL MOUNTED LUMINAIRES - - - - -	170

01

# FREE STANDING LUMINAIRES


APPLICATIONS:

Open-plan office, individual office, etc.







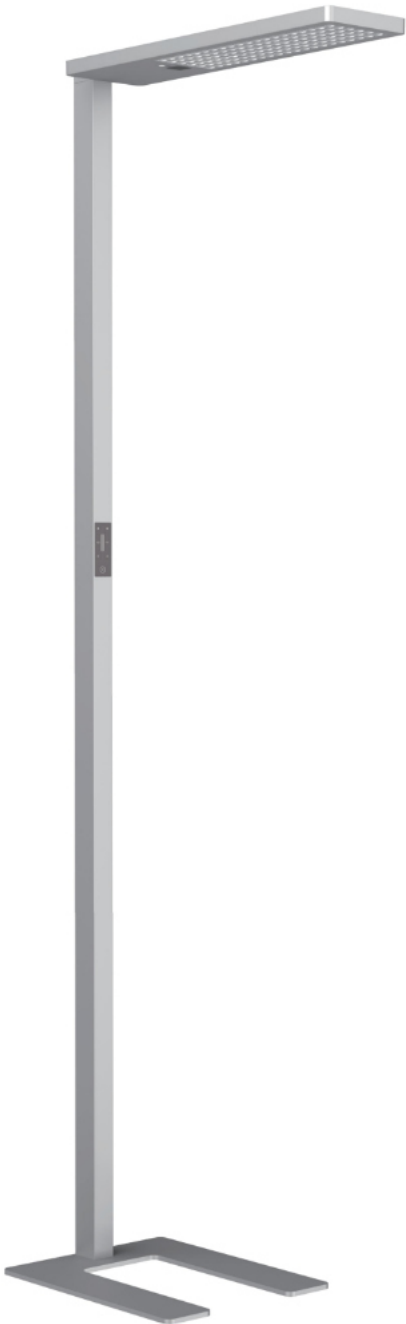

# NOVA-F1

APPLICATIONS:  
Open-plan office, individual office, etc.



Asymmetric optics  
Desktop uniformity  
UD >0.7



Integrated die-cast and 23mm  
ultra-thin lamp head, good  
heat dissipation performance



Daylight sensor &  
Presence sensor


## PRODUCT PARAMETERS

Luminaire Wattage	80W	100W
Luminous Flux	11200lm	14000lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Optic	Asymmetric optics	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Presence sensor	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	CCT
BNOF1-2010012-BD	↑ 12380lm/1620lm ↓	↑ 88W/12W ↓	3000/4000/6000K
BNOF1-2010012-CD	↑ 11500lm/1500lm ↓	↑ 88W/12W ↓	3000-5700K
BNOF1-2008012-BD	↑ 9580lm/1620lm ↓	↑ 68W/12W ↓	3000/4000/6000K
BNOF1-2008012-CD	↑ 8900lm/1500lm ↓	↑ 68W/12W ↓	3000-5700K


## SIZE

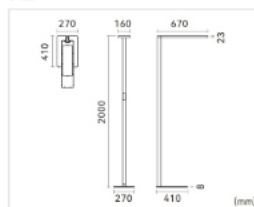

## LIGHT DISTRIBUTION





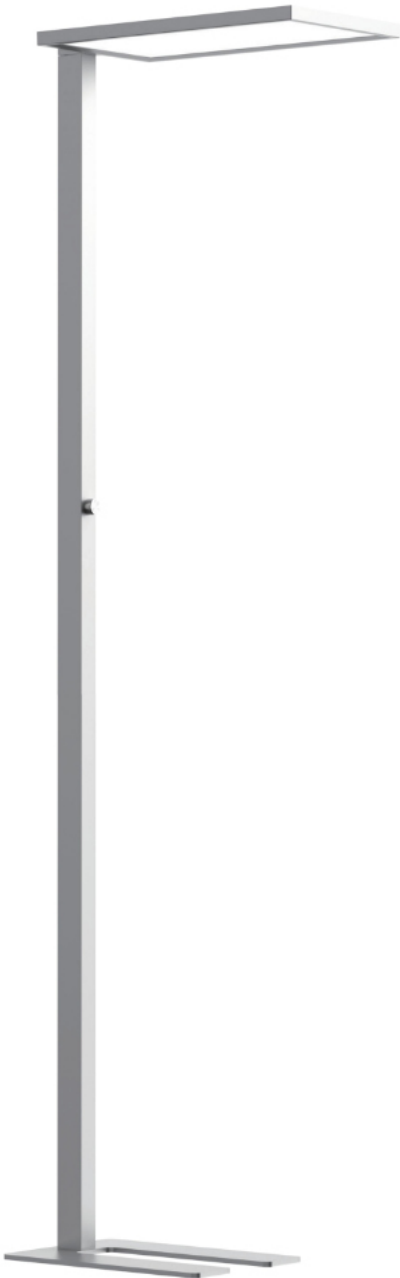

# NEAT-F

APPLICATIONS:  
Open-plan office, individual office, etc.



Integrated die-cast and 22mm ultra-thin lamp head



Competitive price



Microprismatic diffuser design with low glare


## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7500lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	$\uparrow 115^\circ / 80^\circ \downarrow$
UGR	<math><18</math>
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	NO
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BNEJ-1906030-BN	$\uparrow 4200\text{lm} / 3300\text{lm} \downarrow$	$\uparrow 30\text{W} / 30\text{W} \downarrow$	3000/4000/6000K

## SIZE

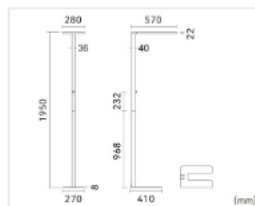

## LIGHT DISTRIBUTION








# BOOK-F

## APPLICATIONS:

Home office, study room, children's study area, etc.



Designed with large shielding angle



Light efficiency up to 130LM/W



Motion sensor


## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7800lm
CCT	3000K / 4000K / 6000K
CRI	>80
Optic	Asymmetric optics
UGR	CD <17
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Motion sensor
Colours	Silver / White / Black / Madeira brown / Blackberry leaf green / Hermosa pink / Spruce blue
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BBKJ-1806020-BN	↑ 6000lm/1800lm ↓	↑ 40W/20W ↓	3000/4000/6000K
BBKJ-1806020-BM	↑ 6000lm/1800lm ↓	↑ 40W/20W ↓	3000/4000/6000K

## SIZE



## LIGHT DISTRIBUTION







# ROMAN-F0

## APPLICATIONS:

Open-plan office, individual office, etc.



Large angle cut-off, effective control of light glare Anti-glare modules



Touch panel dimming



Support smart control function


## PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	100W
Luminous Flux	9000lm	12000lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
CRI	>80		
Beam Angle	↑ 115° / 60° ↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BROF0-1906018-BN	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1906018-BM	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1906018-BD	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1908016-BN	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-BM	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-BD	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-CD	↑ 8800lm/1600lm ↓	↑ 64W/16W ↓	3000-5700K
BROF0-1910015-BD	↑ 13200lm/1800lm ↓	↑ 85W/15W ↓	3000/4000/6000K
BROF0-1910015-CD	↑ 11500lm/1500lm ↓	↑ 85W/15W ↓	3000-5700K

## SIZE




## LIGHT DISTRIBUTION



slightly different



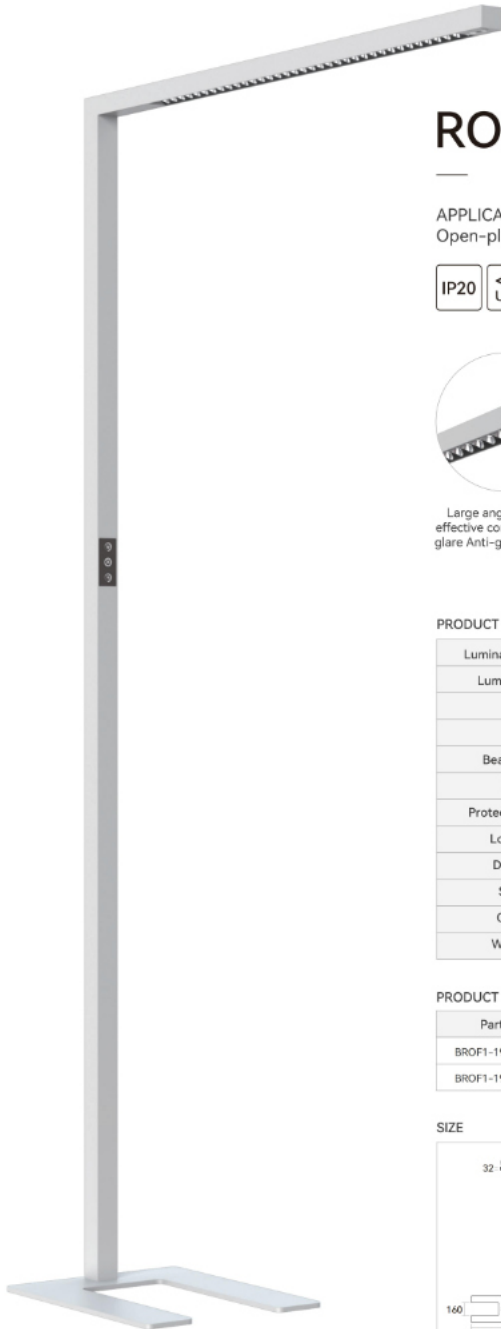

# ROMAN-F1

## APPLICATIONS:

Open-plan office, individual office, etc.



Large angle cut-off, effective control of light glare Anti-glare modules



Light efficiency up to 148LM/W



Support smart control function


## PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	$\uparrow$ 115° / 60° $\downarrow$
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BROF1-1908020-BD	$\uparrow$ 9350lm/2450lm $\downarrow$	$\uparrow$ 60W/20W $\downarrow$	3000/4000/6000K
BROF1-1908020-CD	$\uparrow$ 8800lm/2000lm $\downarrow$	$\uparrow$ 60W/20W $\downarrow$	3000-5700K


## SIZE



## LIGHT DISTRIBUTION





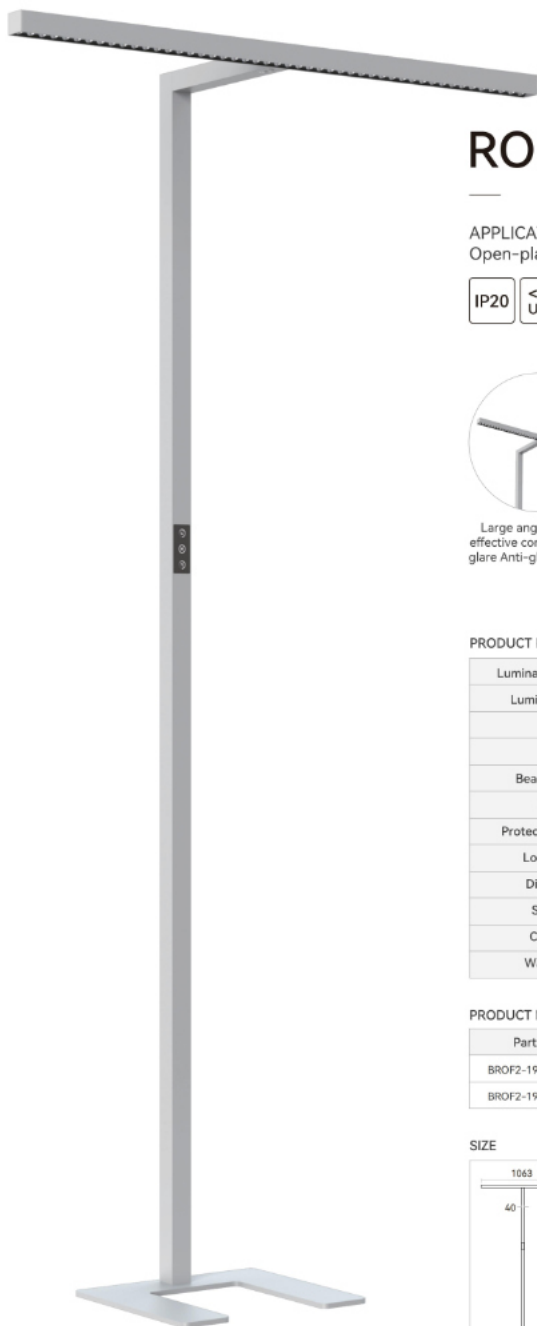

# ROMAN-F2

APPLICATIONS:  
Open-plan office, individual office, etc.



Large angle cut-off,  
effective control of light  
glare Anti-glare modules



Light efficiency  
up to 150LM/W



Support smart  
control function


## PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	12000lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	$\uparrow 115^\circ$ / $60^\circ \downarrow$
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BROF2-1908020-BD	$\uparrow 9500\text{lm}/2500\text{lm} \downarrow$	$\uparrow 60\text{W}/20\text{W} \downarrow$	3000/4000/6000K
BROF2-1908020-CD	$\uparrow 8800\text{lm}/2200\text{lm} \downarrow$	$\uparrow 60\text{W}/20\text{W} \downarrow$	3000-5700K


## SIZE



## LIGHT DISTRIBUTION





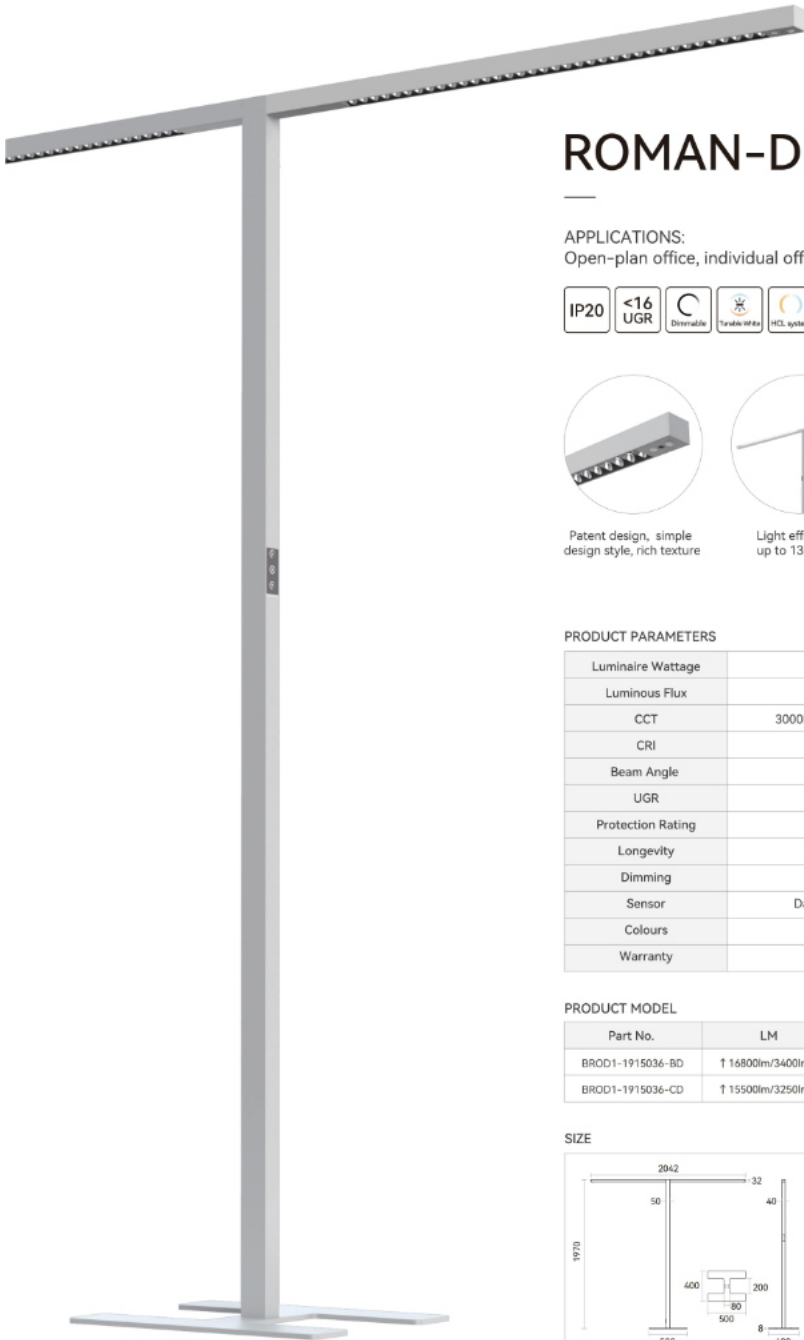

# ROMAN-D1

## APPLICATIONS:

Open-plan office, individual office, etc.



Patent design, simple design style, rich texture



Light efficiency up to 135LM/W



Support smart control function


## PRODUCT PARAMETERS

Luminaire Wattage	150W
Luminous Flux	20200lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 60° ↓
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BROD1-1915036-BD	↑ 16800lm/3400lm ↓	↑ 114W/36W ↓	3000/4000/6000K
BROD1-1915036-CD	↑ 15500lm/3250lm ↓	↑ 114W/36W ↓	3000-5700K

## SIZE



## LIGHT DISTRIBUTION







# FREE-F

## APPLICATIONS:

Open-plan office, individual office, etc.



Patent design, simple design style, rich texture



Light efficiency up to 135LM/W



Direct and indirect light control individually


## PRODUCT PARAMETERS

Luminaire Wattage	80W	100W
Luminous Flux	10400lm	13300lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
UGR	<math><14</math>	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	CCT
BFRF-1908024-BN	↑ 7280lm/3120lm ↓	↑ 56W/24W ↓	3000/4000/6000K
BFRF-1908024-BD	↑ 7280lm/3120lm ↓	↑ 56W/24W ↓	3000/4000/6000K
BFRF-1910020-BN	↑ 10500lm/2800lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BFRF-1910020-BD	↑ 10500lm/2800lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BFRF-1910020-CD	↑ 10000lm/2600lm ↓	↑ 80W/20W ↓	3000-5700K

## SIZE



## LIGHT DISTRIBUTION







# FREE-D1

APPLICATIONS:  
Open-plan office, individual office, etc.



Patent design, simple design style, rich texture



Light efficiency up to 132LM/W



Direct and indirect light control individually


## PRODUCT PARAMETERS

Luminaire Wattage	150W
Luminous Flux	19800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BFRD-2015045-BN-01	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-BD-01	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-CN-01	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000-5700K
BFRD-2015045-CD-01	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION





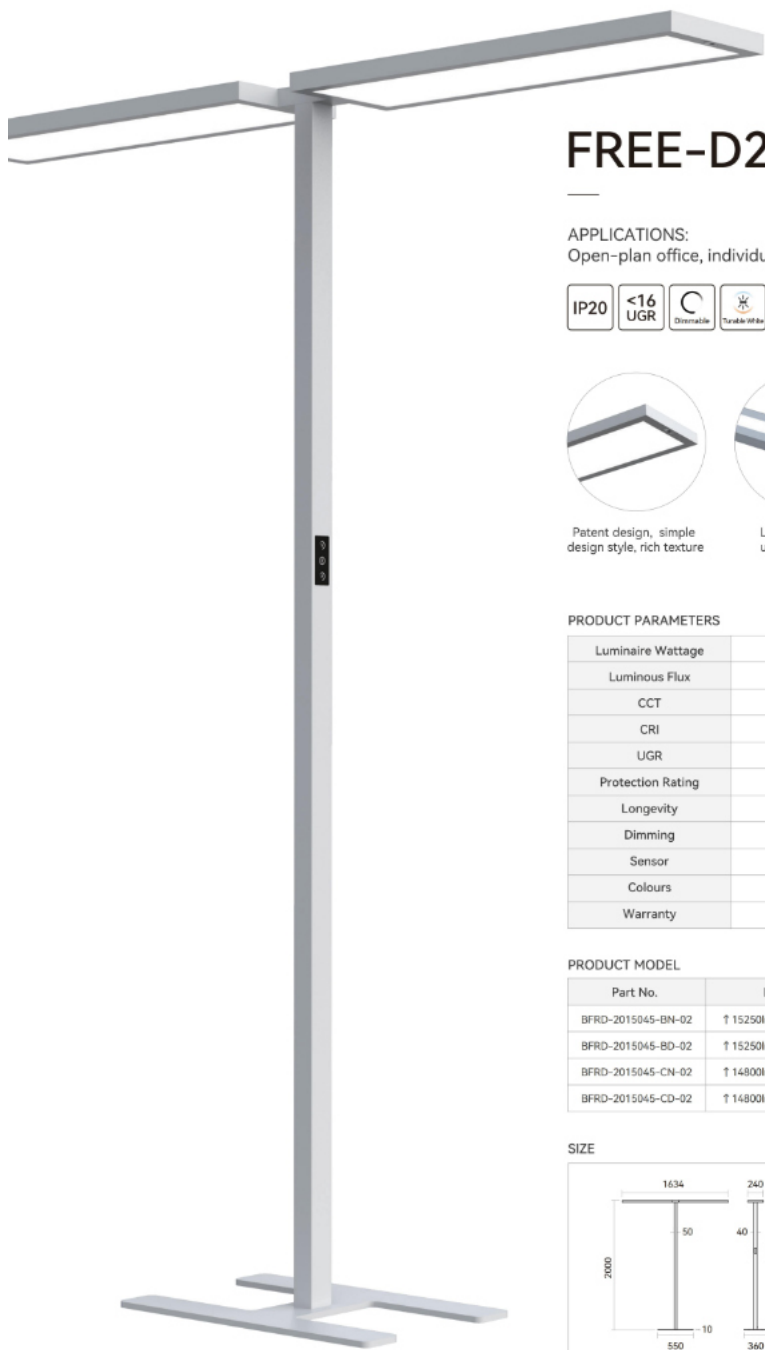


# FREE-D2

## APPLICATIONS:

Open-plan office, individual office, etc.



Patent design, simple design style, rich texture



Light efficiency up to 132LM/W



Direct and indirect light control individually


## PRODUCT PARAMETERS

Luminaire Wattage	150W
Luminous Flux	19800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL


Part No.	LM	Power	CCT
BFRD-2015045-BN-02	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-BD-02	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-CN-02	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000-5700K
BFRD-2015045-CD-02	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000-5700K

## SIZE



## LIGHT DISTRIBUTION



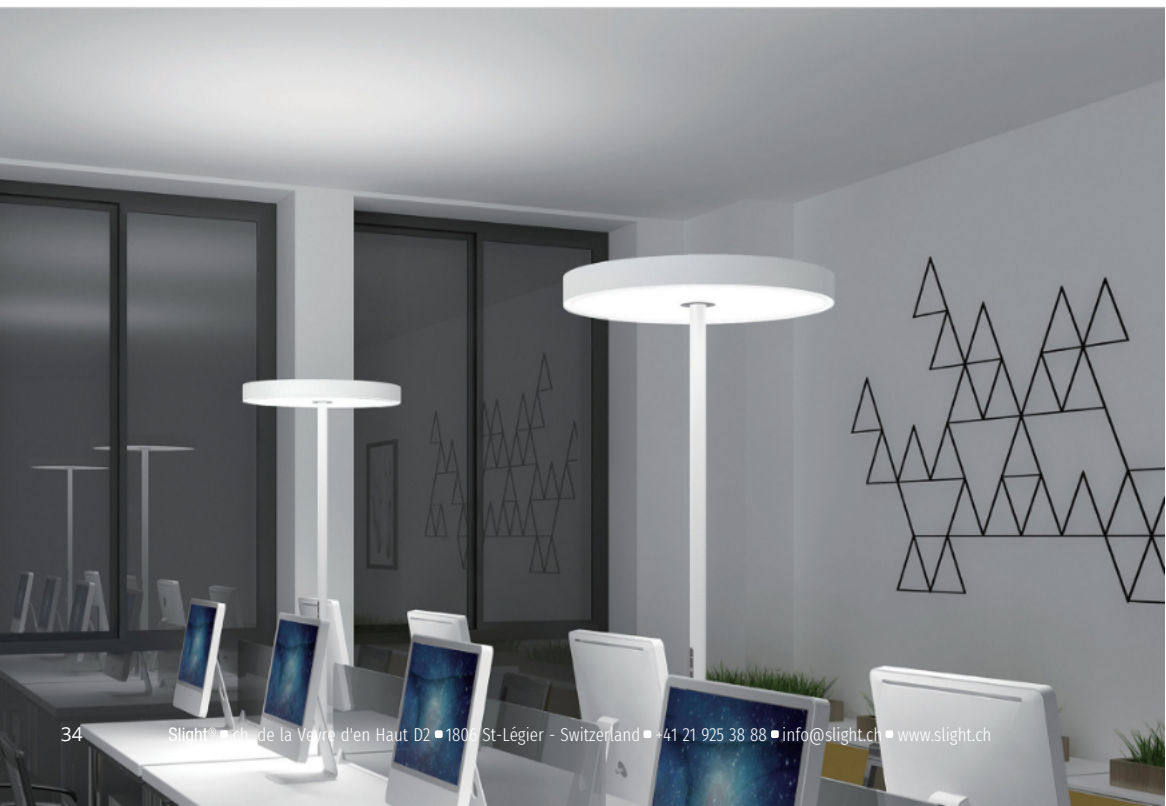



# ROMI-F

APPLICATIONS:  
Open-plan office, individual office, etc.



Microprism diffuser  
UGR<16



Lumen efficiency  
up to 120LM/W



Touch panel dimming


## PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	9645lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BROF-1908040-BN	↑ 6105lm/3540lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BROF-1908040-CN	↑ 5750lm/3372lm ↓	↑ 40W/40W ↓	3000-5700K

## SIZE



## LIGHT DISTRIBUTION








# COFFEE-R

## APPLICATIONS:

Negotiation rooms, small meeting rooms,  
breakout areas and other office areas.  
Living room, bedrooms and study rooms.



95% Indirect light,  
lumen efficiency  
up to 135LM/W



Convenient installation



Cut-Off Pole (Optional)


## PRODUCT PARAMETERS

Luminaire Wattage	45W
Luminous Flux	6000lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<10
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming / Bluetooth dimming (TUYA)(optional)
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BCRF-1904500-BN-03	↑ 6000lm	↑ 45W	3000/4000/6000K
BCRF-1904500-CN-03	↑ 5850lm	↑ 45W	3000-5700K
BCRF-1904500-WN-03	↑ 6000lm	↑ 45W	3000/4000/6000K
BCRJ-1904500-BN-03	↑ 6000lm	↑ 45W	3000/4000/6000K
BCRJ-1904500-CN-03	↑ 5850lm	↑ 45W	3000-5700K
BCRJ-1904500-WN-03	↑ 6000lm	↑ 45W	3000/4000/6000K

## SIZE

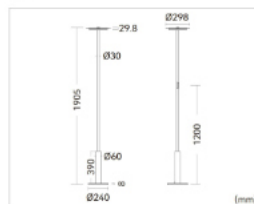

## LIGHT DISTRIBUTION








# COFFEE-S

## APPLICATIONS:

Negotiation rooms, small meeting rooms,  
breakout areas and other office areas.  
Living room, bedrooms and study rooms.



95% Indirect light,  
lumen efficiency  
up to 135LM/W



Push dimming


## PRODUCT PARAMETERS

Luminaire Wattage	45W
Luminous Flux	6200lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<10
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BCSF-1904500-BN	↑ 6200lm	↑ 45W	3000/4000/6000K


## SIZE

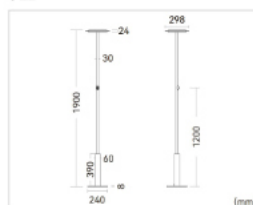

## LIGHT DISTRIBUTION





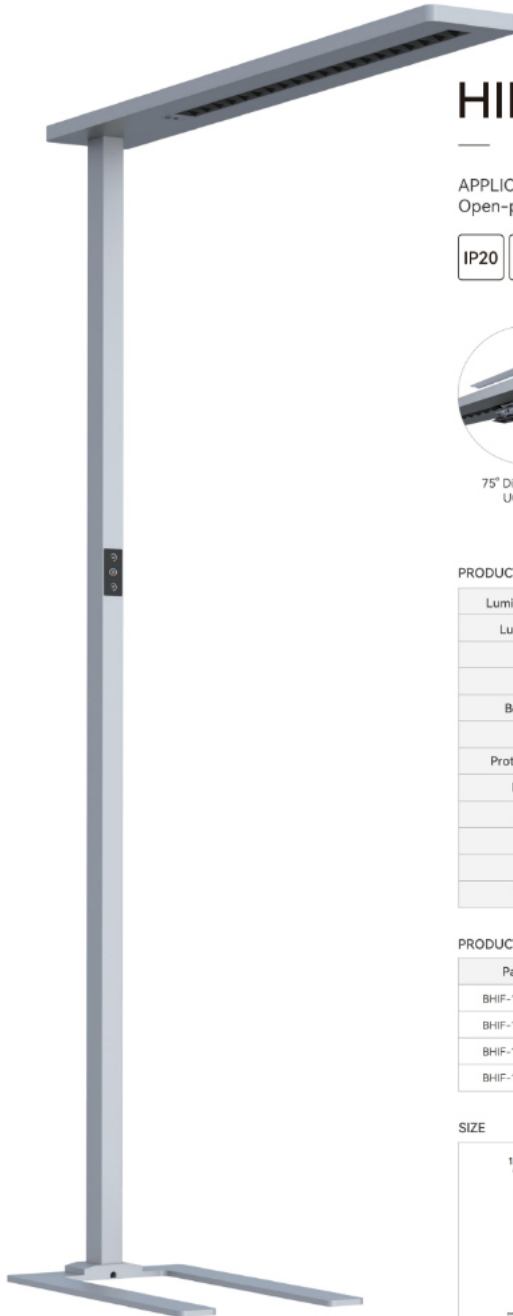

# HILO

APPLICATIONS:  
Open-plan office, individual office, etc.



75° Direct light,  
UGR<10



140° Indirect light,  
provide comfortable  
light to space



Direct and indirect  
light control individually


## PRODUCT PARAMETERS

Luminaire Wattage	110W	140W
Luminous Flux	13700lm	16700lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Beam Angle	↑ 140° / 75° ↓ or ↑ 140° / 50° ↓	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	CCT
BHIF-1911015-BD	↑ 12000lm/1700lm ↓	↑ 95W/15W ↓	3000/4000/6000K
BHIF-1911015-CD	↑ 10000lm/1500lm ↓	↑ 95W/15W ↓	3000-5700K
BHIF-1914015-BD	↑ 15000lm/1700lm ↓	↑ 125W/15W ↓	3000/4000/6000K
BHIF-1914015-CD	↑ 13000lm/1500lm ↓	↑ 125W/15W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION





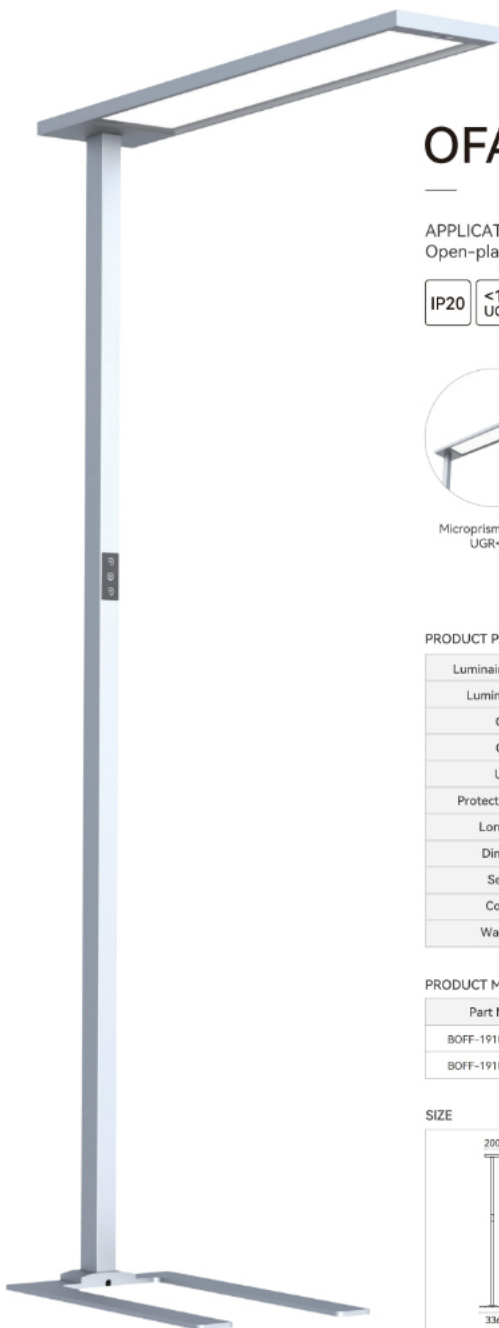


# OFA

APPLICATIONS:  
Open-plan office, individual office, etc.



Microprism diffuser  
UGR<14



140° indirect light,  
provide comfortable  
light to space



Direct and indirect  
light control individually


## PRODUCT PARAMETERS

Luminaire Wattage	100W
Luminous Flux	12000lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<14
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BOFF-1910025-BD	↑ 950lm/2500lm ↓	↑ 75W/25W ↓	3000/4000/6000K
BOFF-1910025-CD	↑ 8250lm/2250lm ↓	↑ 75W/25W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION






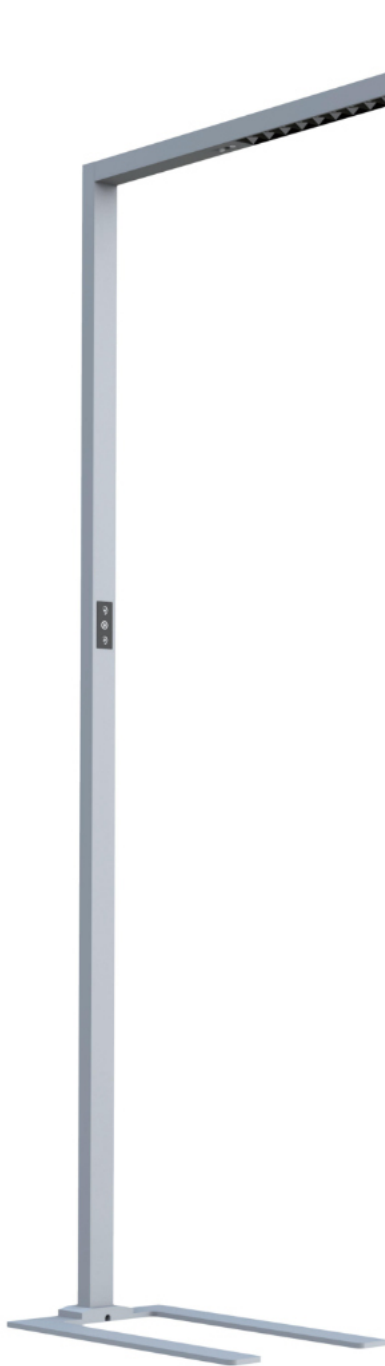

# ELFOO-F 2.0

## APPLICATIONS:

Open-plan office, individual office, etc.



Direct light 75°/50°,  
Indirect light 155°



Support smart  
control function



Direct and indirect  
light control individually


## PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	10400lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BEFF-1908020-BD-01	↑ 8000lm/2400lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BEFF-1908020-CD-01	↑ 6600lm/2200lm ↓	↑ 60W/20W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION






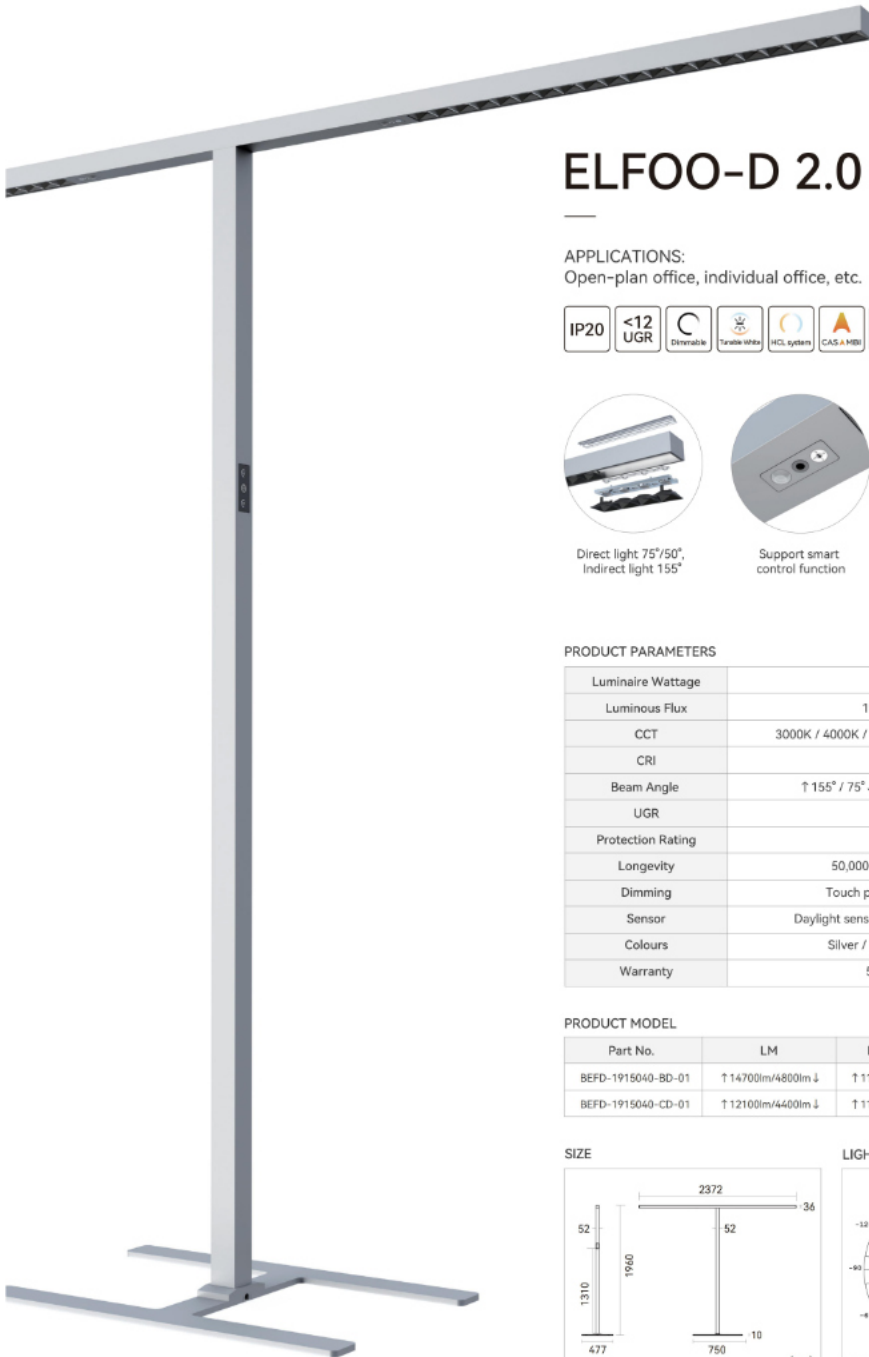

# ELFOO-D 2.0

APPLICATIONS:  
Open-plan office, individual office, etc.



Direct light 75°/50°,  
Indirect light 155°



Support smart  
control function



Direct and indirect  
light control individually

## PRODUCT PARAMETERS

Luminaire Wattage	150W
Luminous Flux	19500lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BEFD-1915040-BD-01	↑ 14700lm/4800lm ↓	↑ 110W/40W ↓	3000/4000/6000K
BEFD-1915040-CD-01	↑ 12100lm/4400lm ↓	↑ 110W/40W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION






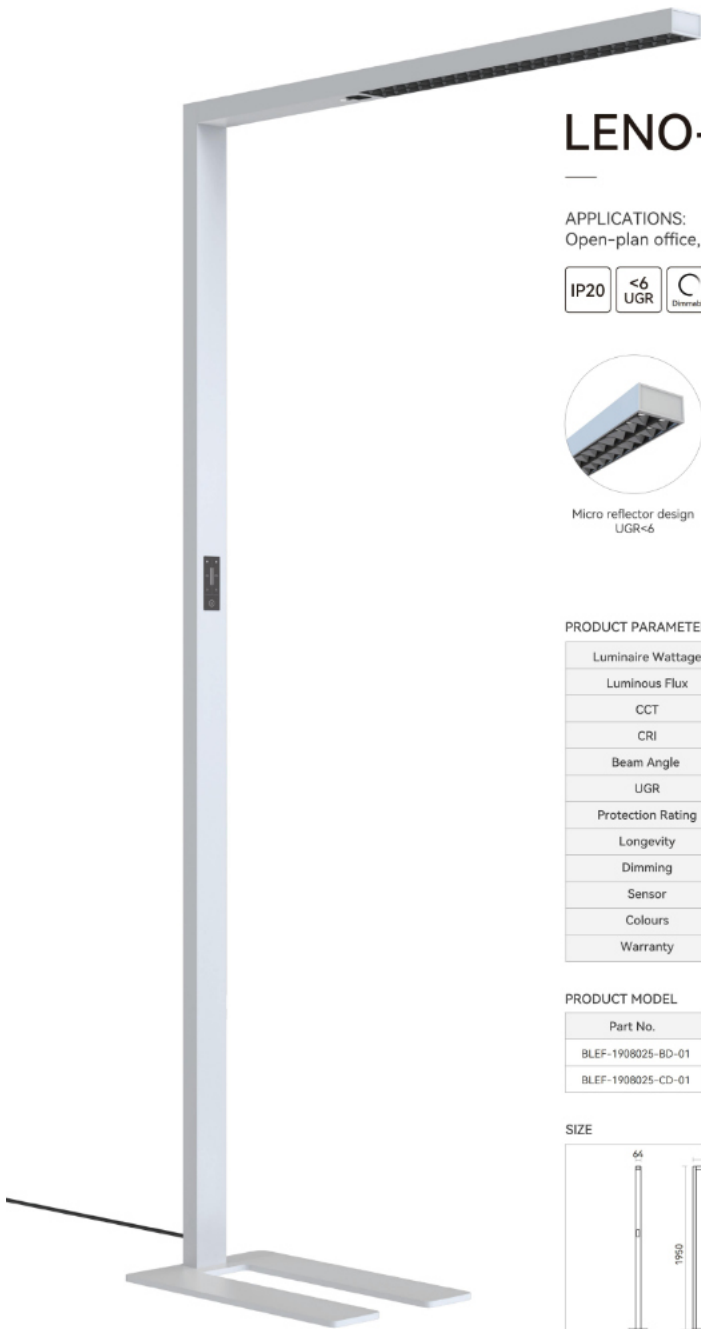


# LENO-F 2.0

APPLICATIONS:  
Open-plan office, individual office, etc.



Micro reflector design  
UGR<6



Support smart  
control function



Direct and indirect  
light control individually


## PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11600lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 50° ↓
UGR	<6
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Motion sensor / Presencesensor or Daylight sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BLEF-1908025-BD-01	↑ 9300lm/2300lm ↓	↑ 55W/25W ↓	3000/4000/6000K
BLEF-1908025-CD-01	↑ 8950lm/2250lm ↓	↑ 55W/25W ↓	3000-5700K

## SIZE




## LIGHT DISTRIBUTION





# MAYE-FR 2.0

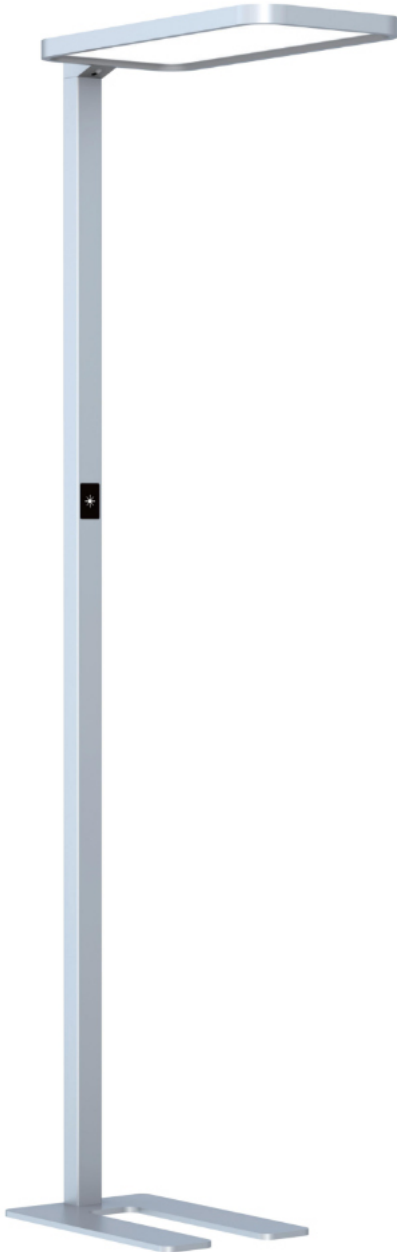

APPLICATIONS:  
Open-plan office, individual office, etc.



High light efficiency  
reach 150LM/W



Support smart  
control function



Direct and indirect light  
control individually


## PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BMRF-1908040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000-5700K
BMRF-1910020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION





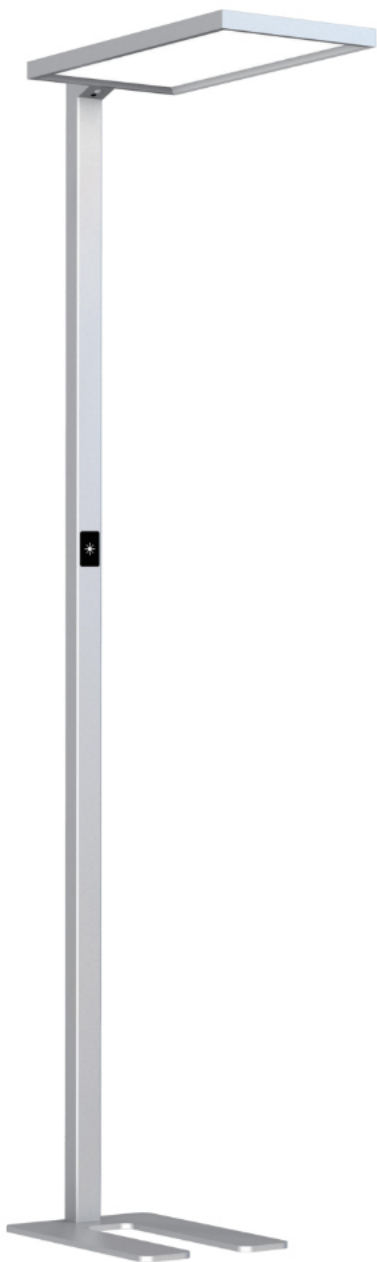

# MAYE-FS 2.0

## APPLICATIONS:


Open-plan office, individual office, etc.



High light efficiency  
reach 150LM/W



Support smart  
control function



Direct and indirect light  
control individually


## PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BMSF-1908040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000-5700K
BMSF-1910020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION





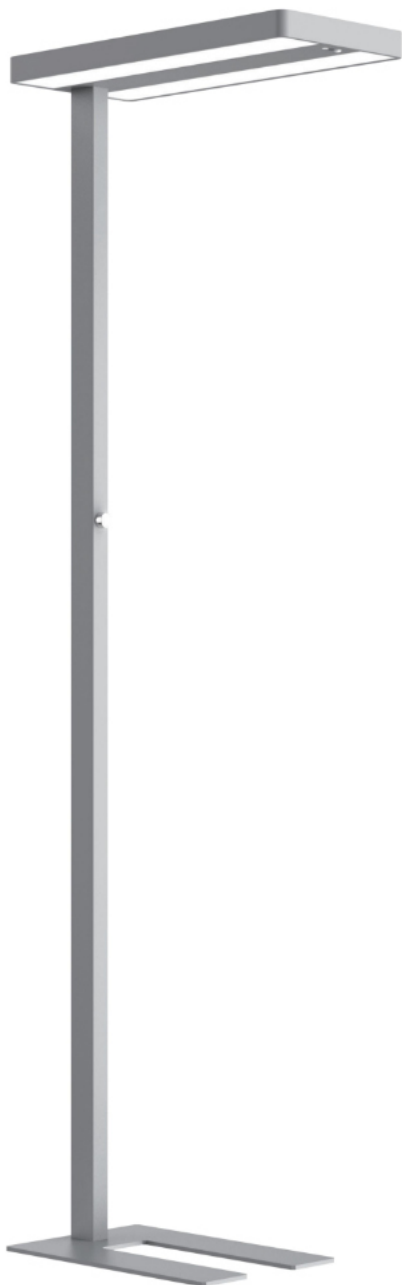


# HOME C 3.0

APPLICATIONS:  
Open-plan office, individual office, etc.



High light efficiency  
reach 145LM/W



Support smart  
control function



Cut-Off Pole, Good for  
shipment and sales online


## PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BHOJ-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOJ-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOJ-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K


## SIZE



## LIGHT DISTRIBUTION





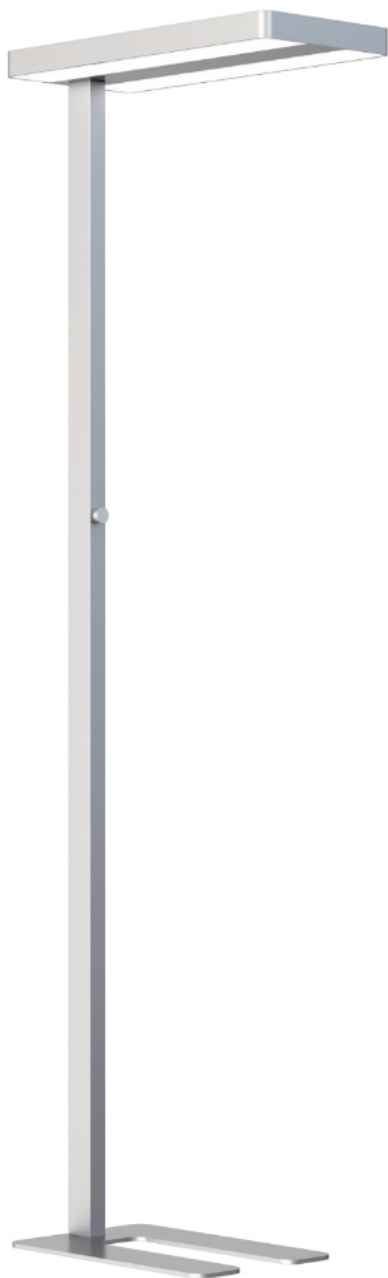


# HOMEO 3.0

APPLICATIONS:  
Open-plan office, individual office, etc.



High light efficiency  
reach 145LM/W



Support smart  
control function



Knob dimming


## PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BHOF-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOF-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOF-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K


## SIZE



## LIGHT DISTRIBUTION






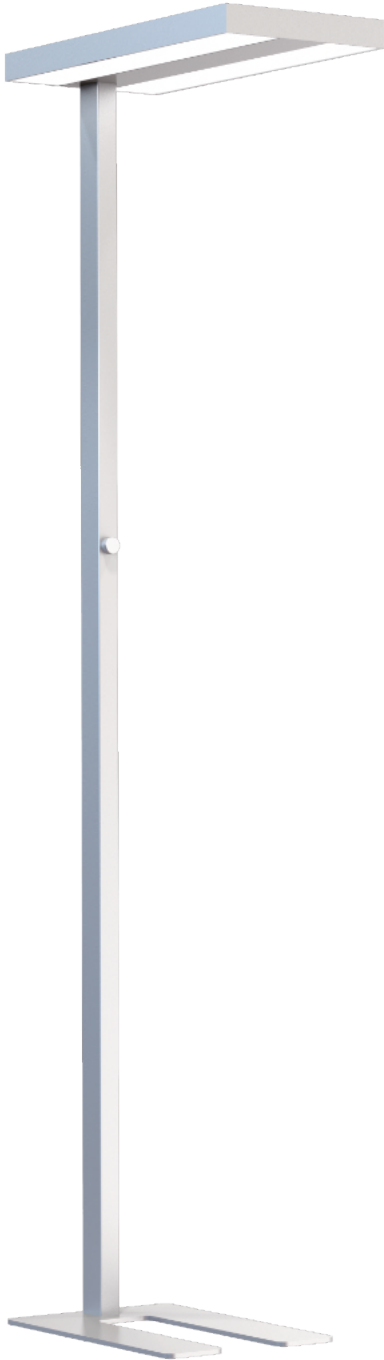

# NITEC 3.0


APPLICATIONS:  
Open-plan office, individual office, etc.



High light efficiency  
reach 145LM/W



UGR<19, uniform and  
healthy lighting



Cut-Off Pole, Good for  
shipment and sales online


## PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BNIJ-1906030-BN-01	14990lm/2740lm ↓	130W/30W ↓	3000/4000/6000K
BNIJ-1906030-BM-01	14990lm/2740lm ↓	130W/30W ↓	3000/4000/6000K
BNIJ-1906030-BD-01	14990lm/2740lm ↓	130W/30W ↓	3000/4000/6000K
BNIJ-1908040-BN-01	16300lm/4500lm ↓	140W/40W ↓	3000/4000/6000K
BNIJ-1908040-BM-01	16300lm/4500lm ↓	140W/40W ↓	3000/4000/6000K
BNIJ-1908040-BD-01	16300lm/4500lm ↓	140W/40W ↓	3000/4000/6000K
BNIJ-1908020-BN	19600lm/2000lm ↓	160W/20W ↓	3000/4000/6000K
BNIJ-1908020-BM	19600lm/2000lm ↓	160W/20W ↓	3000/4000/6000K
BNIJ-1908020-BD	19600lm/2000lm ↓	160W/20W ↓	3000/4000/6000K


## SIZE

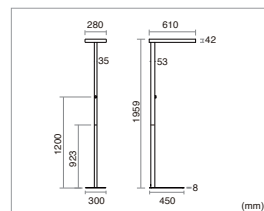

## LIGHT DISTRIBUTION






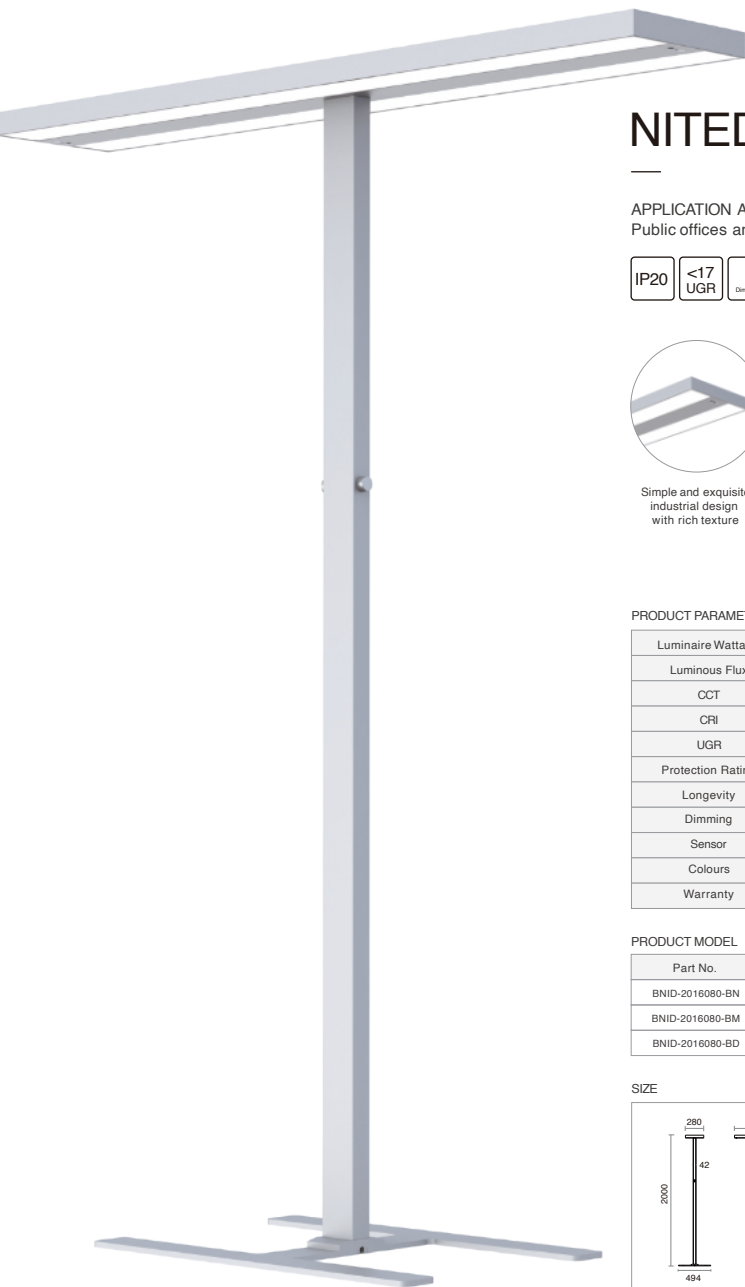


# NITED


APPLICATION AREAS:  
Public offices and other office spaces.



Simple and exquisite industrial design with rich texture



UGR<17, uniform and healthy lighting



Support smart control function


## PRODUCT PARAMETERS

Luminaire Wattage	160W
Luminous Flux	19200lm
CCT	3000K / 4000K / 6000K
CFI	>80
UGR	<17
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BNID-2016080-BN	111500lm/7700lm ↓	180W/80W ↓	3000/4000/6000K
BNID-2016080-BM	111500lm/7700lm ↓	180W/80W ↓	3000/4000/6000K
BNID-2016080-BD	111500lm/7700lm ↓	180W/80W ↓	3000/4000/6000K


## SIZE



## LIGHT DISTRIBUTION






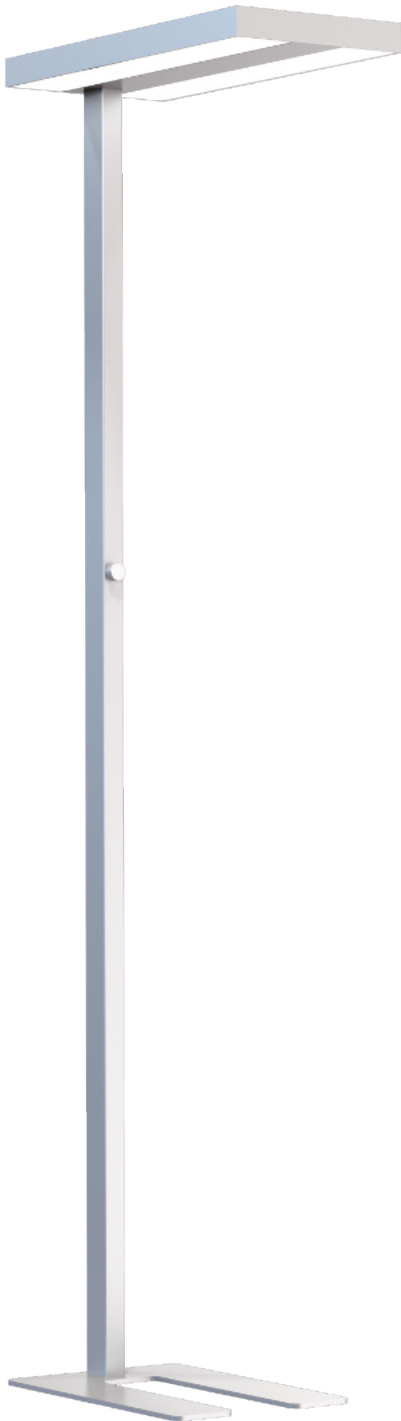

# NITEO 3.0

## APPLICATION AREAS:


For personal offices, public offices and other office spaces.



Simple and exquisite industrial design with rich texture



UGR<19, uniform and healthy lighting



Support smart control function


## PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BNIF-1906030-BN-01	14990lm/2740lm↓	130W/30W↓	3000/4000/6000K
BNIF-1906030-BM-01	14990lm/2740lm↓	130W/30W↓	3000/4000/6000K
BNIF-1906030-BD-01	14990lm/2740lm↓	130W/30W↓	3000/4000/6000K
BNIF-1908040-BN-01	16300lm/4500lm↓	140W/40W↓	3000/4000/6000K
BNIF-1908040-BM-01	16300lm/4500lm↓	140W/40W↓	3000/4000/6000K
BNIF-1908040-BD-01	16300lm/4500lm↓	140W/40W↓	3000/4000/6000K
BNIF-1908020-BN	19600lm/2000lm↓	160W/20W↓	3000/4000/6000K
BNIF-1908020-BM	19600lm/2000lm↓	160W/20W↓	3000/4000/6000K
BNIF-1908020-BD	19600lm/2000lm↓	160W/20W↓	3000/4000/6000K

## SIZE



## LIGHT DISTRIBUTION




02

## DESK FIXED LUMINAIRES


APPLICATIONS:

Open-plan office, individual office, etc.



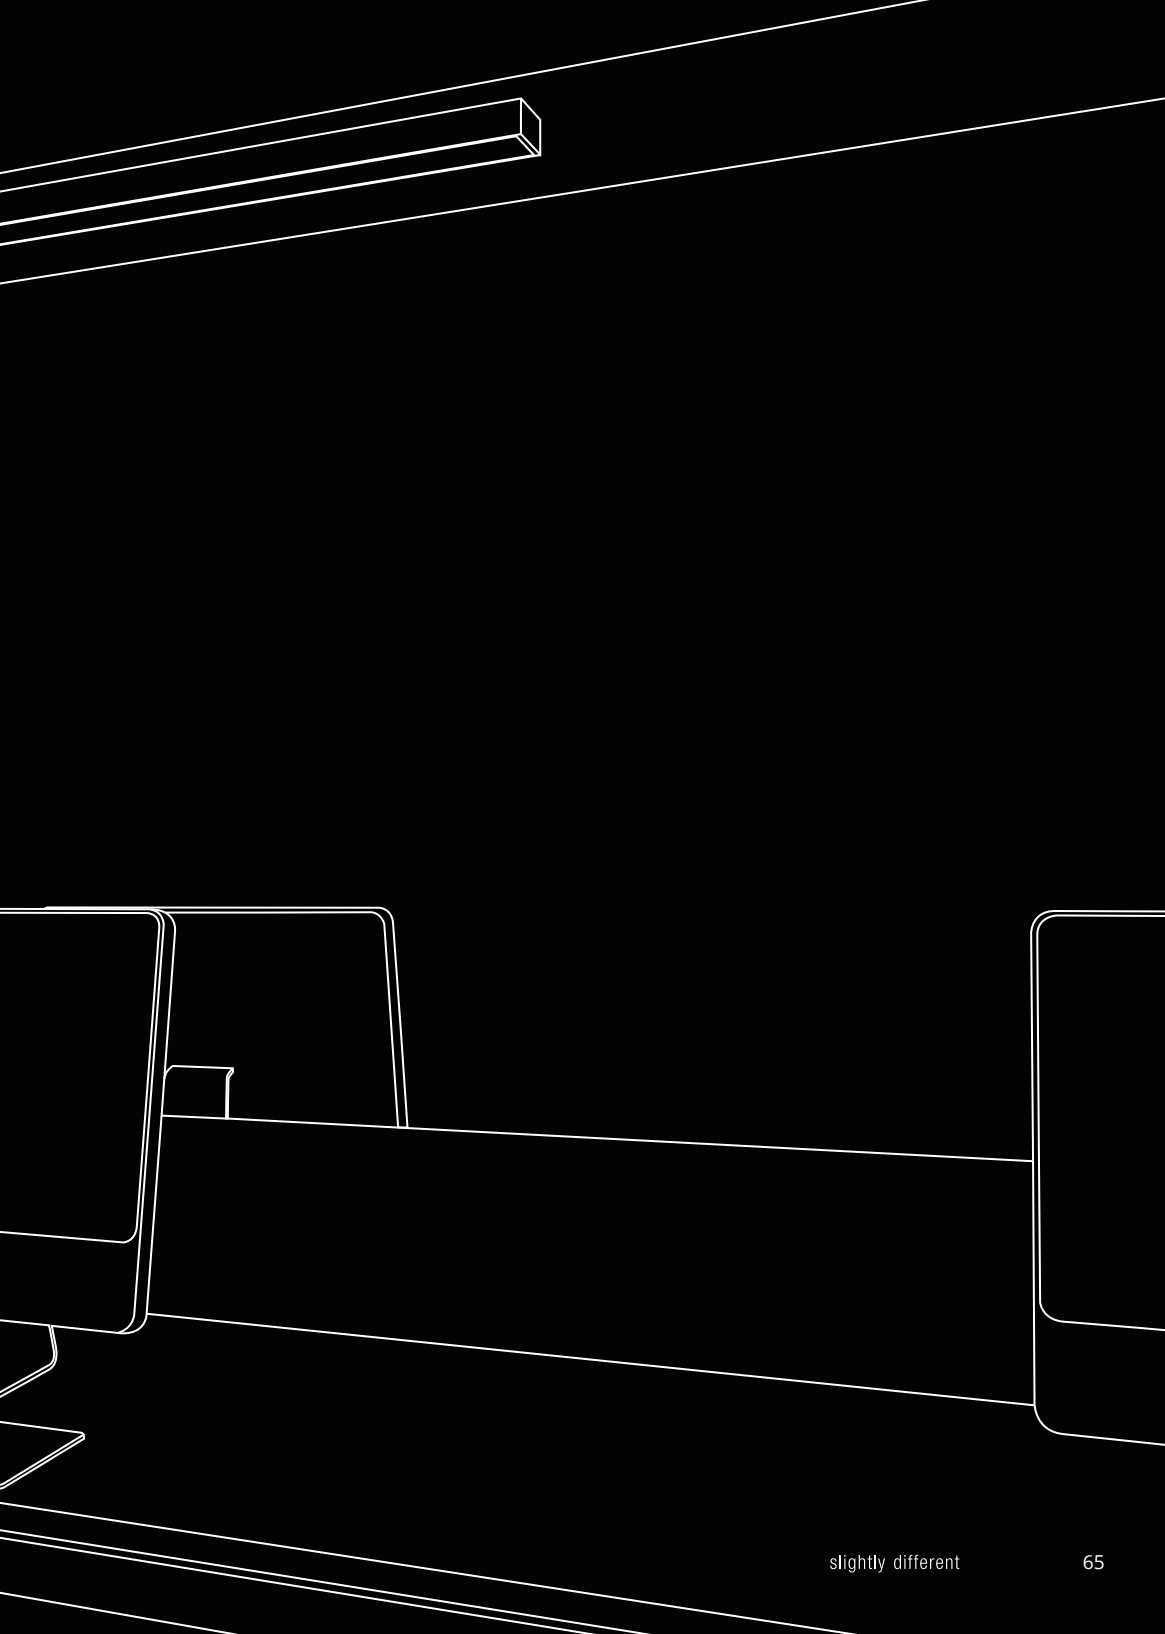



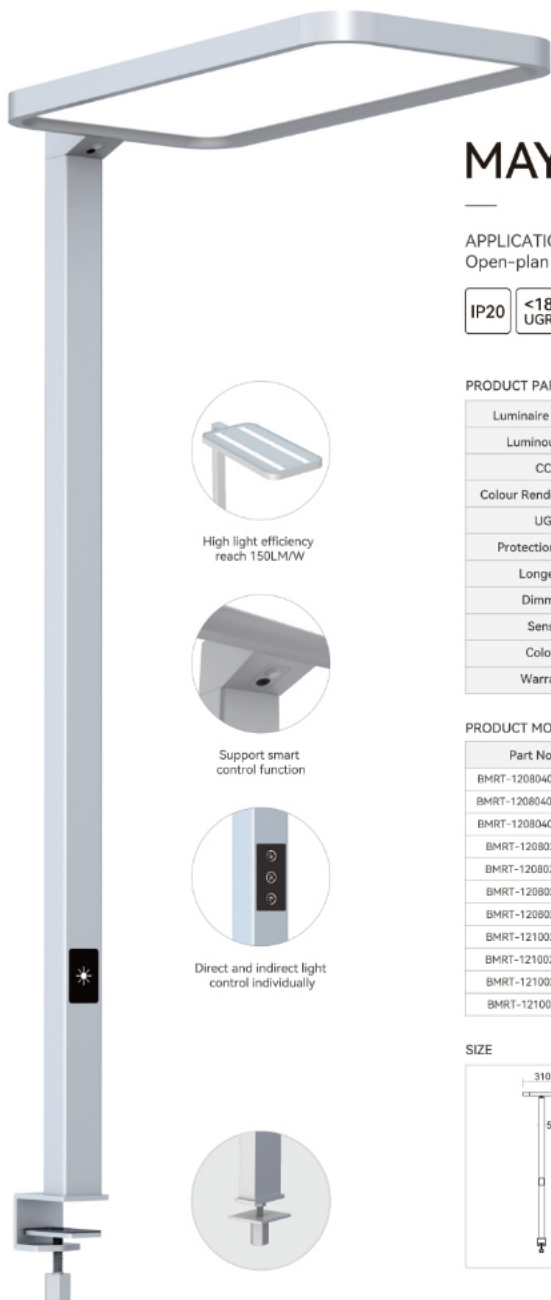

# MAYE-TR 2.0

APPLICATIONS:  
Open-plan office, individual office, etc.



## PRODUCT PARAMETERS


Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		



High light efficiency  
reach 150LM/W



Support smart  
control function




Direct and indirect light  
control individually




## PRODUCT MODEL

Part No.	LM	Power	CCT
BMRT-1208040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000-5700K
BMRT-1210020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION





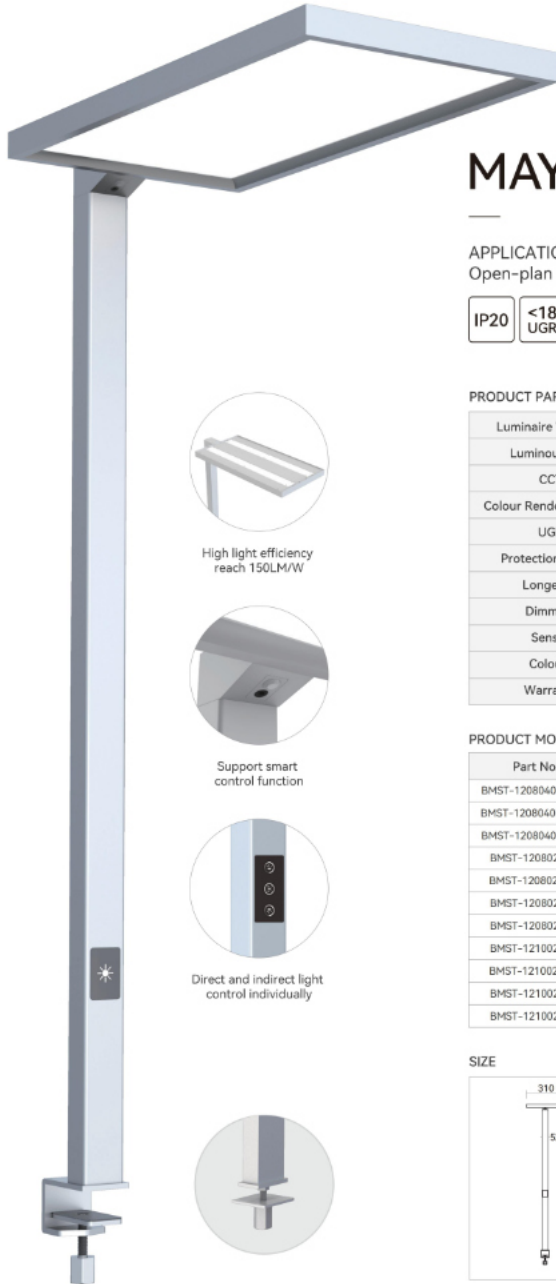

# MAYE-TS 2.0

APPLICATIONS:  
Open-plan office, individual office, etc.



High light efficiency  
reach 150LM/W



Support smart  
control function



Direct and indirect  
control individually




## PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BMST-1208040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000-5700K
BMST-1210020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION





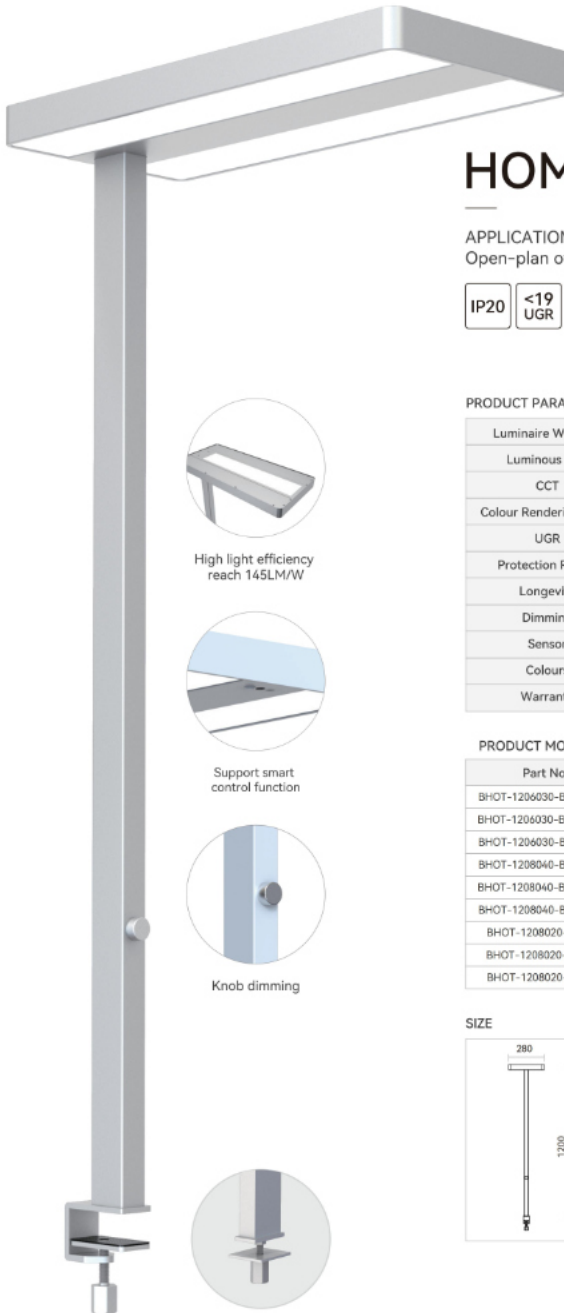

# HOMET 3.0

APPLICATIONS:  
Open-plan office, individual office, etc.




## PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BHOT-1206030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1206030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1206030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1208040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOT-1208020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOT-1208020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

## SIZE



## LIGHT DISTRIBUTION







# NITET 3.0

APPLICATIONS:  
Open-plan office, individual office, etc.



High light efficiency  
reach 145LM/W



Support smart  
control function



Knob dimming




## PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	CCT
BNIT-1206030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1206030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1206030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1208040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIT-1208020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIT-1208020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K


## SIZE



## LIGHT DISTRIBUTION






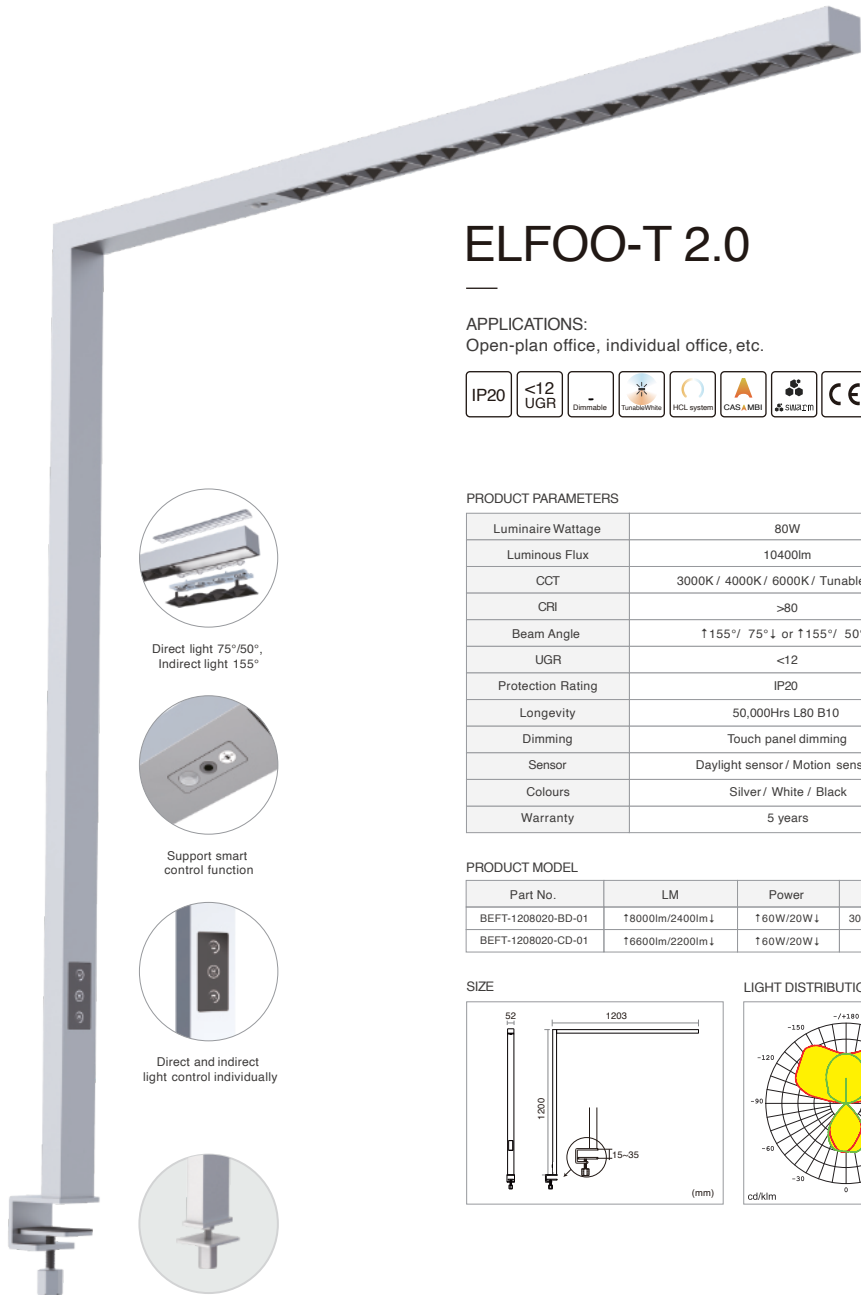


# ELFOO-T 2.0

APPLICATIONS:  
Open-plan office, individual office, etc.




Direct light 75°/50°,  
Indirect light 155°



Support smart  
control function



Direct and indirect  
light control individually




## PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	10400lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BEFT-1208020-BD-01	18000lm/2400lm ↓	160W/20W ↓	3000/4000/6000K
BEFT-1208020-CD-01	16600lm/2200lm ↓	160W/20W ↓	3000-5700K


## SIZE



## LIGHT DISTRIBUTION






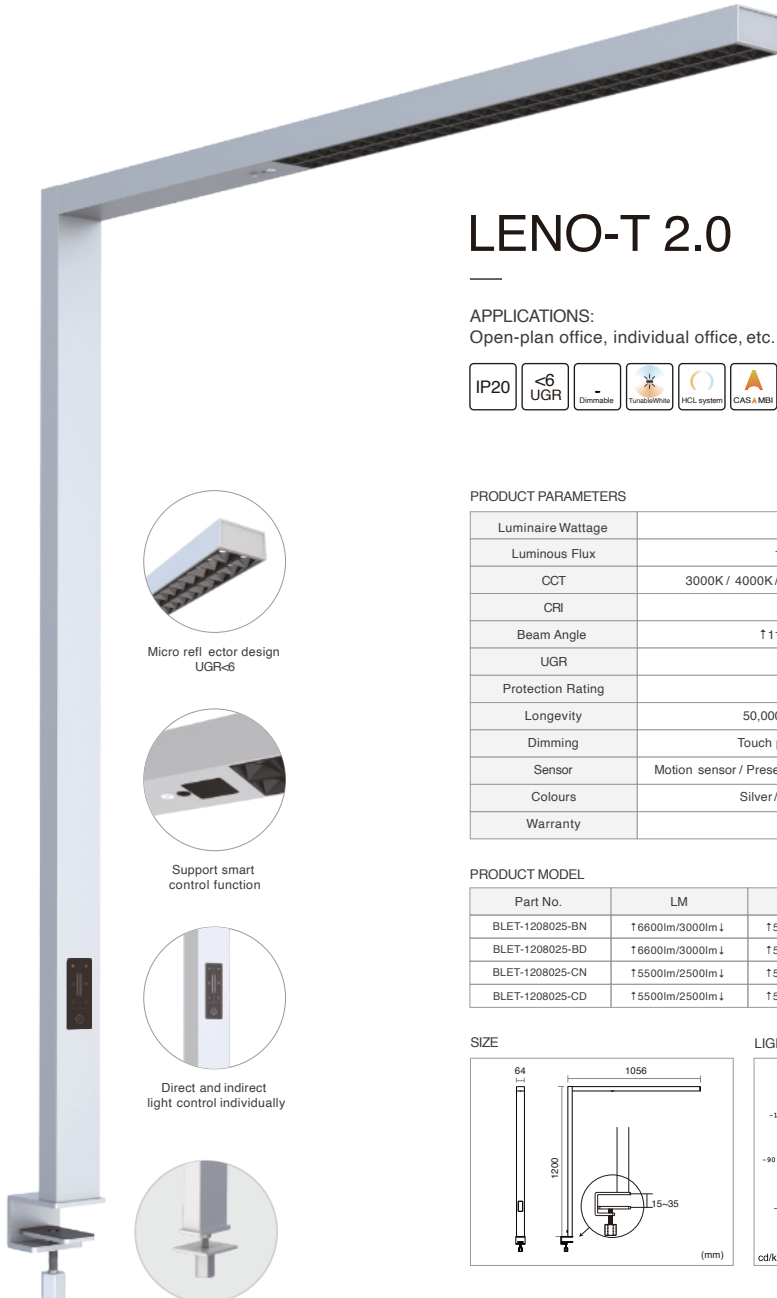


# LENO-T 2.0

APPLICATIONS:  
Open-plan office, individual office, etc.



Micro reflector design  
UGR<math>\le 6</math>



Support smart  
control function



Direct and indirect  
light control individually




## PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11600lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	$\uparrow 115^\circ / 50^\circ \downarrow$
UGR	<math>\le 6</math>
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Motion sensor / Presencesensor or Daylight sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	CCT
BLET-1208025-BN	$\uparrow 6600\text{lm}/3000\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000/4000/6000K
BLET-1208025-BD	$\uparrow 6600\text{lm}/3000\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000/4000/6000K
BLET-1208025-CN	$\uparrow 5500\text{lm}/2500\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000-5700K
BLET-1208025-CD	$\uparrow 5500\text{lm}/2500\text{lm} \downarrow$	$\uparrow 55\text{W}/25\text{W} \downarrow$	3000-5700K

## SIZE



## LIGHT DISTRIBUTION





03

# PENDANT LUMINAIRES

## APPLICATIONS:


Open-plan office, training room,  
conference room and other office spaces.




# MAYE Pro-PS

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.

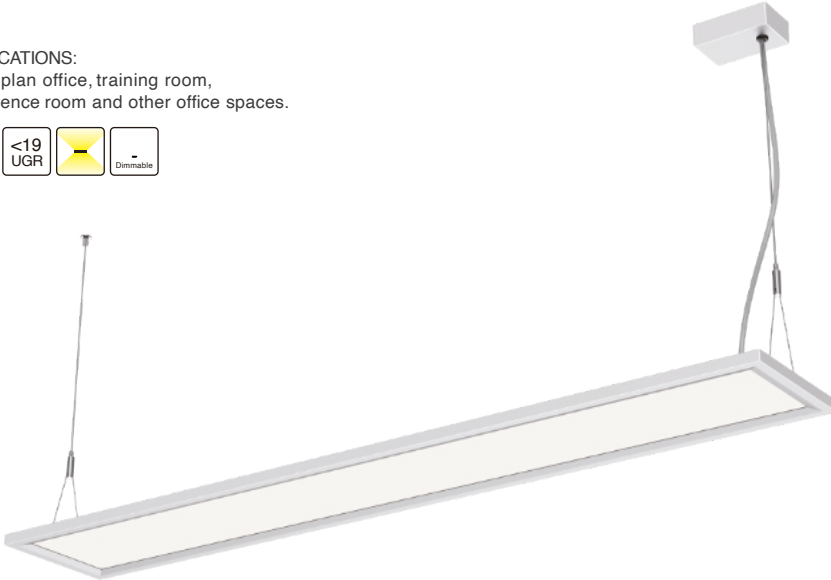

Large light-distribution area for direct light  
15mm ultra-thin edge design



Structural polarization design for indirect light



Support linkable luminaires


## PRODUCT PARAMETERS

Luminaire Wattage	60W	60W	70W
Luminous Flux	7800lm	8200lm	9450lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	110° / 80° ↓		
UGR	<19	<17	
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI		
Colours	Silver / White / Black		
Warranty	5 years		


## PRODUCT MODEL

Part No.	LM	Power	Function
BMPP-1206030-NN	14500lm/3300lm ↓	130W/30W ↓	On/off
BMPP-1206030-DN	14500lm/3300lm ↓	130W/30W ↓	DALI dimming
BMPP-1206020-NN	16000lm/2200lm ↓	140W/20W ↓	On/off
BMPP-1206020-DN	16000lm/2200lm ↓	140W/20W ↓	DALI dimming
BMPP-1507028-NN	16370lm/3080lm ↓	142W/28W ↓	On/off
BMPP-1507028-DN	16370lm/3080lm ↓	142W/28W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# ROMAN-P0

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.



- Patent design, simple design style, rich texture
- Light efficiency up to 148lm/W
- Support DALI and 1-10V dimming




## PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	8910lm	10400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 115° / 60° ↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BROP0-1206024-NN	16010lm/2900lm ↓	136W/24W ↓	On/off
BROP0-1206024-VN	16010lm/2900lm ↓	136W/24W ↓	1-10V dimming
BROP0-1206024-DN	16010lm/2900lm ↓	136W/24W ↓	DALI dimming
BROP0-1507028-NN	17000lm/3400lm ↓	142W/28W ↓	On/off
BROP0-1507028-VN	17000lm/3400lm ↓	142W/28W ↓	1-10V dimming
BROP0-1507028-DN	17000lm/3400lm ↓	142W/28W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION






# ROMAN-P1

## APPLICATIONS:

Open-plan office, individual office, meeting room, guest room etc.



- Patent design, simple design style, rich texture
- Light efficiency up to 150lm/W
- Support DALI and 1-10V dimming




## PRODUCT MODEL

Part No.	LM	Power	Function
BROP1-6506024-NN	15900lm/3100lm ↓	136W/24W ↓	On/off
BROP1-6506024-VN	15900lm/3100lm ↓	136W/24W ↓	1-10V dimming
BROP1-6506024-DN	15900lm/3100lm ↓	136W/24W ↓	DALI dimming
BROP1-9008032-NN	17800lm/4200lm ↓	148W/32W ↓	On/off
BROP1-9008032-VN	17800lm/4200lm ↓	148W/32W ↓	1-10V dimming
BROP1-9008032-DN	17800lm/4200lm ↓	148W/32W ↓	DALI dimming
BROP1-1212048-NN	112000lm/6000lm ↓	172W/48W ↓	On/off
BROP1-1212048-VN	112000lm/6000lm ↓	172W/48W ↓	1-10V dimming
BROP1-1212048-DN	112000lm/6000lm ↓	172W/48W ↓	DALI dimming


## PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	120W
Luminous Flux	9000lm	12000lm	18000lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	1115°/ 60° ↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / 1-10V dimming / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		

## SIZE



## LIGHT DISTRIBUTION







# CELL-P1

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.

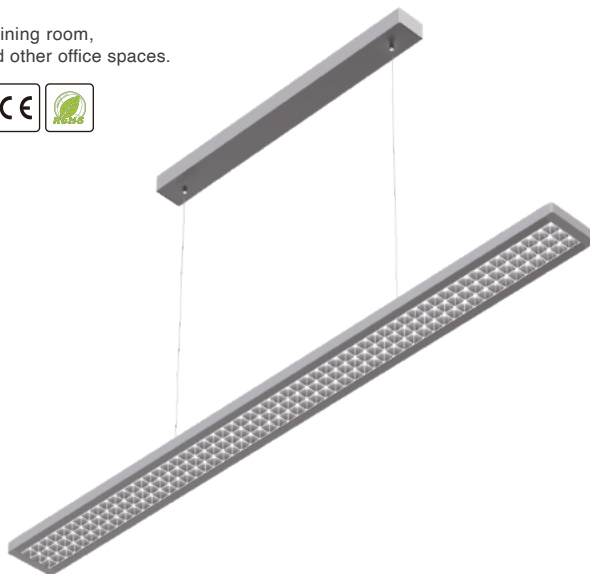

- Patent design, simple design style, rich texture
- Light efficiency up to 116lm/W
- Support DALI and 1-10V dimming




## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7000lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BCEP1-1206025-NN	14500lm/2500lm↓	135W/25W↓	On/off
BCEP1-1206025-VN	14500lm/2500lm↓	135W/25W↓	1-10V dimming
BCEP1-1206025-DN	14500lm/2500lm↓	135W/25W↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# CELL-P2

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.

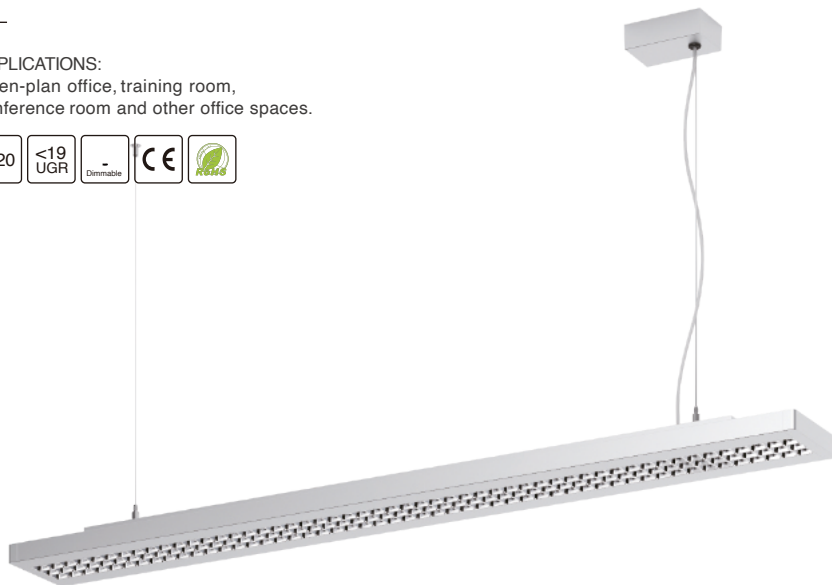

Anti-glare and square-shaped diffuser design, wide beam angle



Direct and indirect light



Support linkable luminaires


## PRODUCT MODEL

Part No.	LM	Power	Function
BCEP2-1205020-NN	14300lm/2200lm ↓	130W/20W ↓	On/off
BCEP2-1205020-DN	14300lm/2200lm ↓	130W/20W ↓	DALI dimming
BCEP2-1202828-NN	3080lm ↓	28W ↓	On/off
BCEP2-1202828-DN	3080lm ↓	28W ↓	DALI dimming
BCEP2-1506325-NN	15450lm/2750lm ↓	138W/25W ↓	On/off
BCEP2-1506325-DN	15450lm/2750lm ↓	138W/25W ↓	DALI dimming
BCEP2-1503535-NN	3850lm ↓	35W ↓	On/off
BCEP2-1503535-DN	3850lm ↓	35W ↓	DALI dimming

## PRODUCT PARAMETERS

Luminaire Wattage	28W	35W	50W	63W
Luminous Flux	3080lm	3850lm	6500lm	8200lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<19			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

## SIZE






# EZY-P

## APPLICATIONS:

Open-plan office, individual office, meeting room, guest room etc.



- Patent design, simple design style, rich texture
- Light efficiency up to 140lm/W
- Support DALI and 1-10V dimming




## LIGHT DISTRIBUTION

Luminaire Wattage	18W	30W	30W	40W	48W
Luminous Flux	2340lm	3900lm	4000lm	5410lm	6720lm
CCT	3000K / 4000K / 6000K				
CRI	>80				
UGR	<19	<21	<19	<21	<19
Protection Rating	IP20				
Longevity	50,000Hrs L80 B10				
Function	On/off / 1-10V dimming / DALI dimming				
Colours	Silver / White / Black				
Warranty	5 years				


## PRODUCT MODEL

Part No.	LM	Power	Function
BEZP-3501812-NN	11560lm/780lm↓	16W/12W↓	On/off
BEZP-3501812-VN	11560lm/780lm↓	16W/12W↓	1-10V dimming
BEZP-3501812-DN	11560lm/780lm↓	16W/12W↓	DALI dimming
BEZP-4503030-NN	3900lm↓	30W↓	On/off
BEZP-4503030-VN	3900lm↓	30W↓	1-10V dimming
BEZP-4503030-DN	3900lm↓	30W↓	DALI dimming
BEZP-4503021-NN	11250lm/2750lm↓	19W/21W↓	On/off
BEZP-4503021-VN	11250lm/2750lm↓	19W/21W↓	1-10V dimming
BEZP-4503021-DN	11250lm/2750lm↓	19W/21W↓	DALI dimming
BEZP-6004040-NN	5410lm↓	40W↓	On/off
BEZP-6004040-VN	5410lm↓	40W↓	1-10V dimming
BEZP-6004040-DN	5410lm↓	40W↓	DALI dimming
BEZP-6004834-NN	11500lm/5220lm↓	114W/34W↓	On/off
BEZP-6004834-VN	11500lm/5220lm↓	114W/34W↓	1-10V dimming
BEZP-6004834-DN	11500lm/5220lm↓	114W/34W↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# KEY-P

## APPLICATIONS:

Open-plan office, individual office, meeting room, guest room etc.

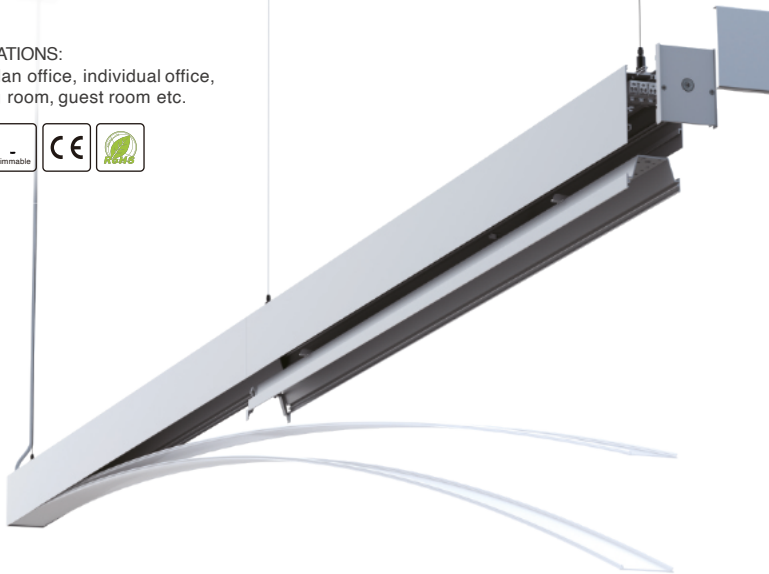

Light efficiency could be 130LM/W



Flexible microprism plate Flexible diffuser




Linkable and no light leakage


## PRODUCT PARAMETERS

Luminaire Wattage	30W	40W	50W	60W
Luminous Flux	3600lm	4800lm	6250lm	7500lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

## SIZE



## LIGHT DISTRIBUTION



## PRODUCT MODEL

UGR: <19

Part No.	LM	Power	Function
BKEP-1205015-NN	14550lm/1950lm↓	135W/15W↓	On/off
BKEP-1205015-VN	14550lm/1950lm↓	135W/15W↓	1-10V dimming
BKEP-1205015-DN	14550lm/1950lm↓	135W/15W↓	DALI dimming
BKEP-1506018-NN	15460lm/2340lm↓	142W/18W↓	On/off
BKEP-1506018-VN	15460lm/2340lm↓	142W/18W↓	1-10V dimming
BKEP-1506018-DN	15460lm/2340lm↓	142W/18W↓	DALI dimming

UGR: >19

Part No.	LM	Power	Function
BKEP-1205030-NN	12500lm/3750lm↓	120W/30W↓	On/off
BKEP-1205030-VN	12500lm/3750lm↓	120W/30W↓	1-10V dimming
BKEP-1205030-DN	12500lm/3750lm↓	120W/30W↓	DALI dimming
BKEP-1506036-NN	13000lm/4500lm↓	124W/36W↓	On/off
BKEP-1506036-VN	13000lm/4500lm↓	124W/36W↓	1-10V dimming
BKEP-1506036-DN	13000lm/4500lm↓	124W/36W↓	DALI dimming
BKEP-1203030-NN	3600lm↓	30W↓	On/off
BKEP-1203030-VN	3600lm↓	30W↓	1-10V dimming
BKEP-1203030-DN	3600lm↓	30W↓	DALI dimming
BKEP-1504040-NN	4800lm↓	40W↓	On/off
BKEP-1504040-VN	4800lm↓	40W↓	1-10V dimming
BKEP-1504040-DN	4800lm↓	40W↓	DALI dimming




slightly different


# NIO

## APPLICATIONS:

Open-plan office, training room,  
conference room and other office spaces.



UGR-6  
Only indirect light  
No direct glare



Light efficiency  
reach to 145LM/W  
Easy installation and linkable


## PRODUCT PARAMETERS

Luminaire Wattage	70W
Luminous Flux	10150lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<math><6</math>
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BNIP-1507000-NN	110150 lm	70W	On/off
BNIP-1507000-VN	110150 lm	70W	1-10V dimming
BNIP-1507000-DN	110150 lm	70W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION








# FREE-P

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.

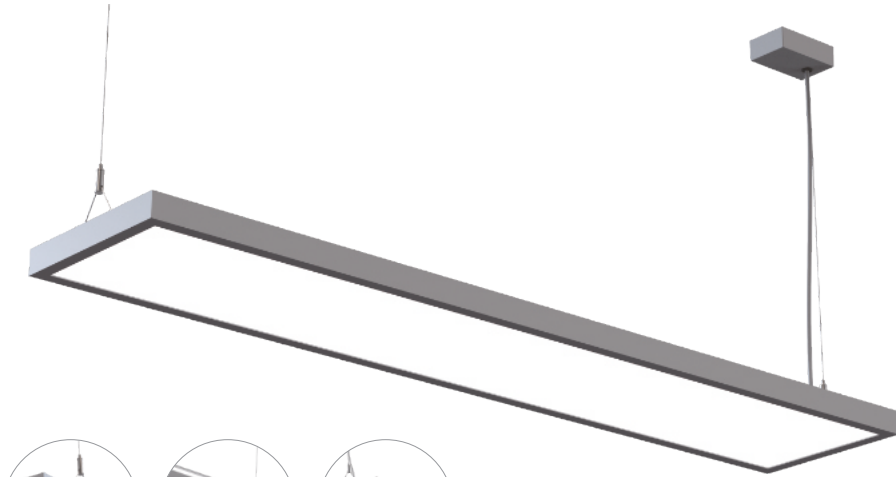

Microprism  
UGR<math><19</math>



Direct and indirect  
lighting with impressive  
light uniformity



Support DALI and  
1-10V dimming


## PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6350lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<math><19</math>	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	


## PRODUCT MODEL

Part No.	LM	Power	Function
BFRP-1205030-NN	12700lm/3650lm ↓	120W/30W ↓	On/off
BFRP-1205030-VN	12700lm/3650lm ↓	120W/30W ↓	1-10V dimming
BFRP-1205030-DN	12700lm/3650lm ↓	120W/30W ↓	DALI dimming
BFRP-1506036-NN	13000lm/4500lm ↓	124W/36W ↓	On/off
BFRP-1506036-VN	13000lm/4500lm ↓	124W/36W ↓	1-10V dimming
BFRP-1506036-DN	13000lm/4500lm ↓	124W/36W ↓	DALI dimming

## SIZE





## LIGHT DISTRIBUTION






# PECO

APPLICATIONS:  
Corridor

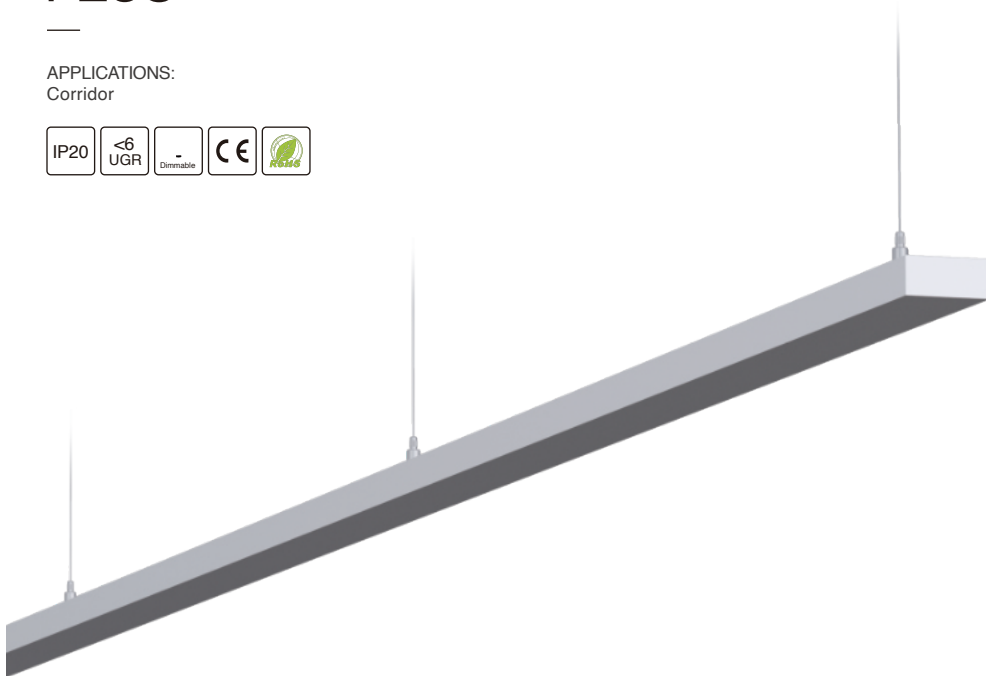

160° indirect light, provide comfortable lighting for the corridor



Easy to connect and link, fast for installation



One driver can support 40 meters fixtures


## PRODUCT PARAMETERS

Luminaire Wattage	10W
Luminous Flux	1000lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<math><6</math>
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off
Sensor	Motion sensor
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BPEP-1201000-NN	11000 lm	10W	On/off
BPEP-1201000-NM	11000 lm	10W	On/off

## SIZE



## LIGHT DISTRIBUTION






slightly different

# ROMI-P

## APPLICATIONS:

Open-plan office, individual office, meeting room, guest room etc.



Microprism  
UGR<18



Extremely simple for  
installation and  
maintenance



Pole suspension and  
wire suspension  
for option


## PRODUCT MODEL

Part No.	LM	Power	Function
BROP-3501812-NN	1500lm/1200lm ↓	16W/12W ↓	On/off
BROP-3501812-VN	1500lm/1200lm ↓	16W/12W ↓	1-10V dimming
BROP-3501812-DN	1500lm/1200lm ↓	16W/12W ↓	DALI dimming
BROP-4503021-NN	11100lm/2200lm ↓	19W/21W ↓	On/off
BROP-4503021-VN	11100lm/2200lm ↓	19W/21W ↓	1-10V dimming
BROP-4503021-DN	11100lm/2200lm ↓	19W/21W ↓	DALI dimming
BROP-6004834-NN	11960lm/3800lm ↓	114W/34W ↓	On/off
BROP-6004834-VN	11960lm/3800lm ↓	114W/34W ↓	1-10V dimming
BROP-6004834-DN	11960lm/3800lm ↓	114W/34W ↓	DALI dimming
BROP-9008056-NN	13400lm/6200lm ↓	124W/56W ↓	On/off
BROP-9008056-VN	13400lm/6200lm ↓	124W/56W ↓	1-10V dimming
BROP-9008056-DN	13400lm/6200lm ↓	124W/56W ↓	DALI dimming


## LIGHT DISTRIBUTION

Luminaire Wattage	18W	30W	48W	80W
Luminous Flux	1700lm	3300lm	5760lm	9600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<18			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

## SIZE



## LIGHT DISTRIBUTION







# ELFOO-P

## APPLICATIONS:

Open-plan office, individual office, cafeteria, training room, classroom, etc.

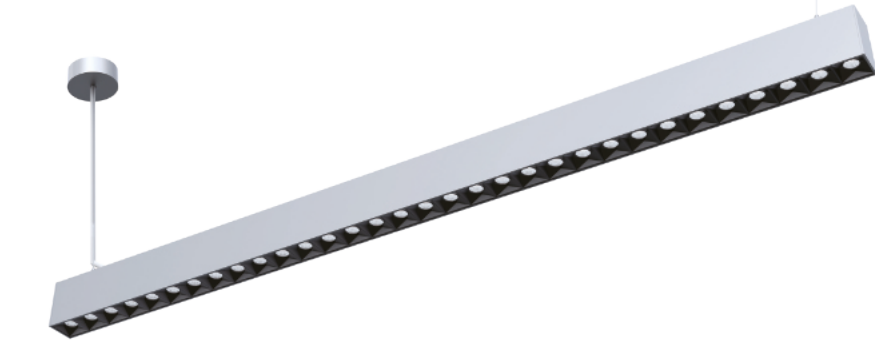

Wide beam angle with professional glare control design, UGR<15

140° upward light output to provide comfortable lighting for the space

No gap and no light come out from connection parts when linked together


## PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6300lm	7400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 140° / 75° ↓ or ↑ 140° / 50° ↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFP-1206024-NN	13500lm/2800lm ↓	136W/24W ↓	On/off
BEFP-1206024-VN	13500lm/2800lm ↓	136W/24W ↓	1-10V dimming
BEFP-1206024-DN	13500lm/2800lm ↓	136W/24W ↓	DALI dimming
BEFP-1507028-NN	14100lm/3300lm ↓	142W/28W ↓	On/off
BEFP-1507028-VN	14100lm/3300lm ↓	142W/28W ↓	1-10V dimming
BEFP-1507028-DN	14100lm/3300lm ↓	142W/28W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION








slightly different


# LENO-P0

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.

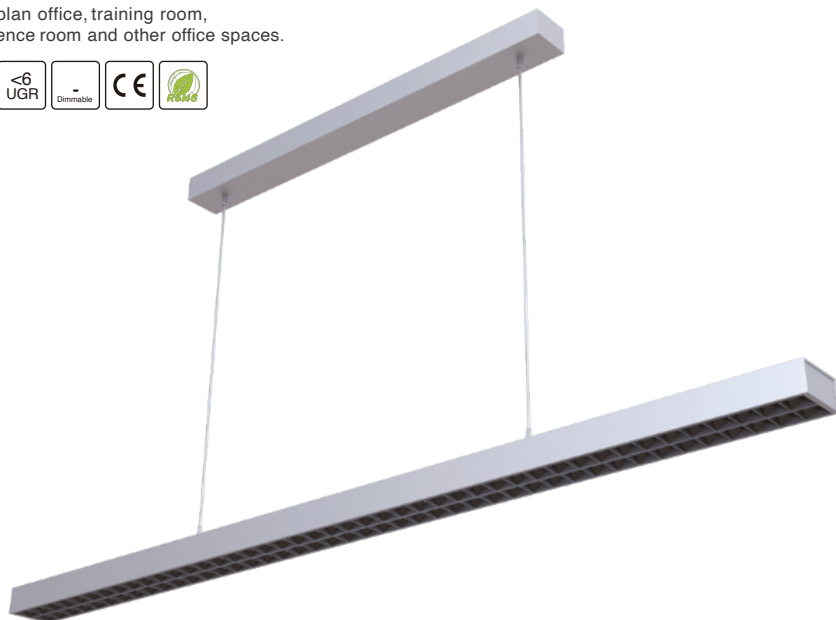

Micro reflector design  
UGR<6



Simple and rich textured  
design, hidden AC cable



Support DALI and  
1-10V dimming


## PRODUCT MODEL

Part No.	LM	Power	Function
BLEP0-1206030-NN	13200lm/3200lm ↓	130W/30W ↓	On/off
BLEP0-1206030-VN	13200lm/3200lm ↓	130W/30W ↓	1-10V dimming
BLEP0-1206030-DN	13200lm/3200lm ↓	130W/30W ↓	DALI dimming
BLEP0-1507035-NN	13800lm/3800lm ↓	135W/35W ↓	On/off
BLEP0-1507035-VN	13800lm/3800lm ↓	135W/35W ↓	1-10V dimming
BLEP0-1507035-DN	13800lm/3800lm ↓	135W/35W ↓	DALI dimming


## PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6400lm	7600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	1115° / 50° ↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

## SIZE



## LIGHT DISTRIBUTION





# LENO-P1

## APPLICATIONS:

Open-plan office, individual office, small meeting room, reception etc.



Micro reflector design  
UGR<6

No gap and no light  
come out from connection  
parts when linked together

Support DALI and  
1-10V dimming


## PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6700lm	7750lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	†115° / 50° †	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BLEP1-1206030-NN	†3400lm/3300lm †	†30W/30W †	On/off
BLEP1-1206030-VN	†3400lm/3300lm †	†30W/30W †	1-10V dimming
BLEP1-1206030-DN	†3400lm/3300lm †	†30W/30W †	DALI dimming
BLEP1-1507035-NN	†3950lm/3800lm †	†35W/35W †	On/off
BLEP1-1507035-VN	†3950lm/3800lm †	†35W/35W †	1-10V dimming
BLEP1-1507035-DN	†3950lm/3800lm †	†35W/35W †	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# LENO-P2

## APPLICATIONS:


Open-plan office, individual office, small meeting room, reception, etc.

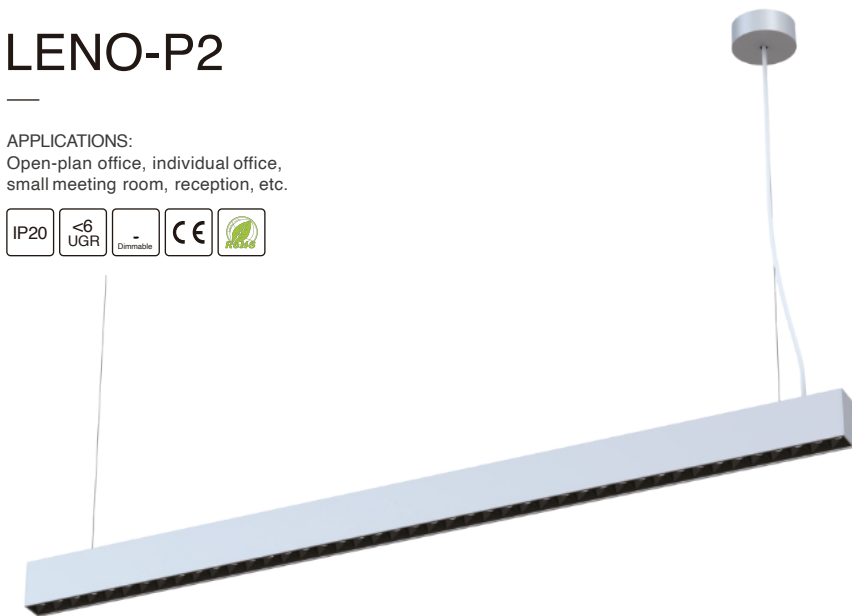

Micro reflector design  
UGR<math>\le 6</math>



Linkable design



Support DALI and  
1-10V dimming


## PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6250lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	115°/ 50° ↓	
UGR	<math>\le 6</math>	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BLEP2-1205025-NN	13350lm/2900lm ↓	125W/25W ↓	On/off
BLEP2-1205025-VN	13350lm/2900lm ↓	125W/25W ↓	1-10V dimming
BLEP2-1205025-DN	13350lm/2900lm ↓	125W/25W ↓	DALI dimming
BLEP2-1506030-NN	14000lm/3500lm ↓	130W/30W ↓	On/off
BLEP2-1506030-VN	14000lm/3500lm ↓	130W/30W ↓	1-10V dimming
BLEP2-1506030-DN	14000lm/3500lm ↓	130W/30W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# MAYE-PR

## APPLICATIONS:

Open-plan office, individual office, meeting room, guest room etc.



Direct and indirect lighting with impressive light uniformity



Microprism UGR<19



Support DALI and 1-10V dimming


## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	6000 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BMRP-1206040-NN	12000lm/4000lm ↓	120W/40W ↓	On/off
BMRP-1206040-VN	12000lm/4000lm ↓	120W/40W ↓	1-10V dimming
BMRP-1206040-DN	12000lm/4000lm ↓	120W/40W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# MAYE-PS

## APPLICATIONS:


Open-plan office, individual office, meeting room, guest room etc.



Direct and indirect lighting with impressive light uniformity



Microprism UGR<19



Support DALI and 1-10V dimming


## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	6000 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BMSP-1206040-NN	12000lm/4000lm ↓	120W/40W ↓	On/off
BMSP-1206040-VN	12000lm/4000lm ↓	120W/40W ↓	1-10V dimming
BMSP-1206040-DN	12000lm/4000lm ↓	120W/40W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# LICON-P

## APPLICATIONS:

Open-plan office, individual office, meeting room, guestroom etc.

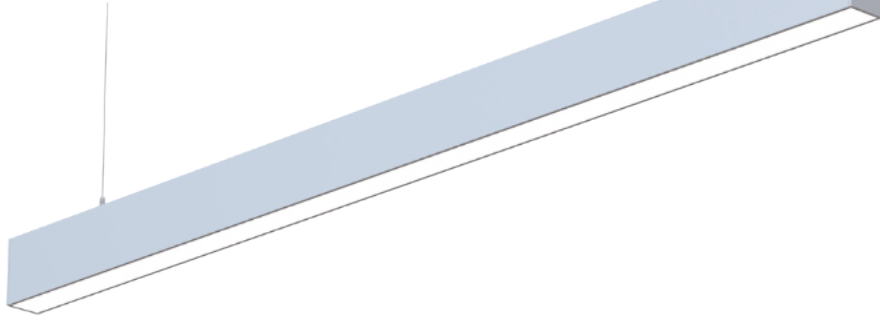

- Simple and rich textured design
- Support DALI and 1-10V dimming
- Simple, easy and quick installation




## PRODUCT PARAMETERS

Luminaire Wattage	40W	48W	50W	60W
Luminous Flux	3600lm	5300lm	4500lm	6600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<21			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


## PRODUCT MODEL

Part No.	LM	Power	Function
BLIP-1204832-NN	12400lm/2900lm ↓	116W/32W ↓	On/off
BLIP-1204832-VN	12400lm/2900lm ↓	116W/32W ↓	1-10V dimming
BLIP-1204832-DN	12400lm/2900lm ↓	116W/32W ↓	DALI dimming
BLIP-1506040-NN	13000lm/3600lm ↓	120W/40W ↓	On/off
BLIP-1506040-VN	13000lm/3600lm ↓	120W/40W ↓	1-10V dimming
BLIP-1506040-DN	13000lm/3600lm ↓	120W/40W ↓	DALI dimming
BLIP-1204040-NN	3600lm ↓	40W ↓	On/off
BLIP-1204040-VN	3600lm ↓	40W ↓	1-10V dimming
BLIP-1204040-DN	3600lm ↓	40W ↓	DALI dimming
BLIP-1505050-NN	4500lm ↓	50W ↓	On/off
BLIP-1505050-VN	4500lm ↓	50W ↓	1-10V dimming
BLIP-1505050-DN	4500lm ↓	50W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION









04

# SURFACE MOUNTED LUMINAIRES

APPLICATIONS:

Open-plan office, reception,  
training room, cafeteria, etc.

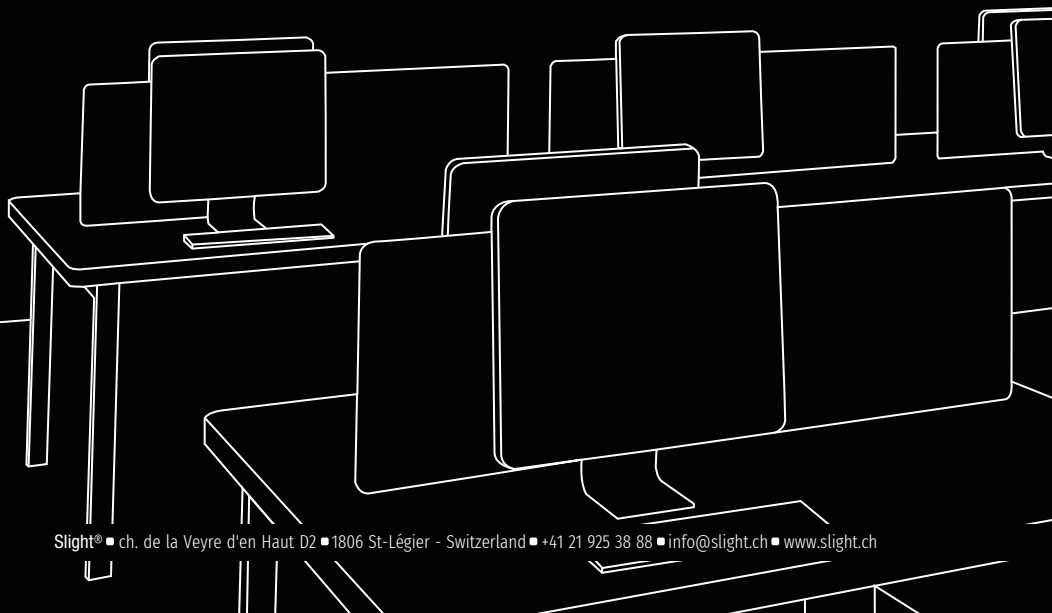

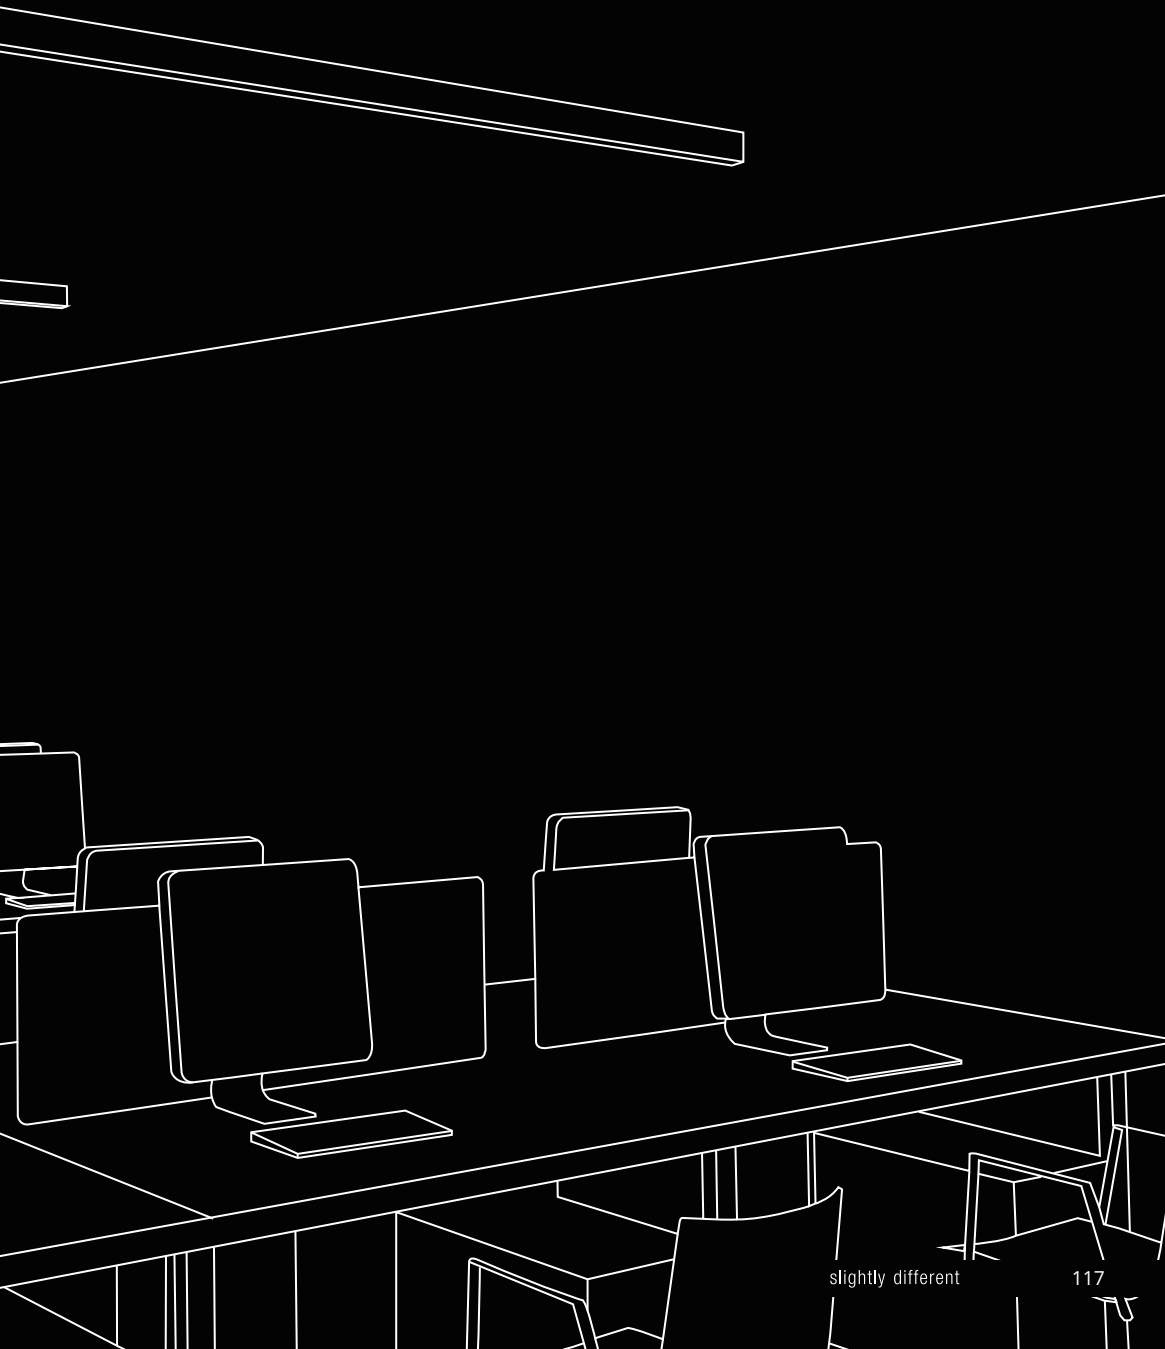


# EZY-C

APPLICATIONS:  
Open-plan office, individual office,  
meeting room, guest room etc.



Patent design, simple design style, rich texture  
Light efficiency up to 140lm/W  
Support DALI and 1-10V dimming




## PRODUCT MODEL

Part No.	LM	Power	Function
BEZC-3501812-NN	11560lm/780lm ↓	16W/12W ↓	On/off
BEZC-3501812-VN	11560lm/780lm ↓	16W/12W ↓	1-10V dimming
BEZC-3501812-DN	11560lm/780lm ↓	16W/12W ↓	DALI dimming
BEZC-4503030-NN	3900lm ↓	30W ↓	On/off
BEZC-4503030-VN	3900lm ↓	30W ↓	1-10V dimming
BEZC-4503030-DN	3900lm ↓	30W ↓	DALI dimming
BEZC-4503021-NN	11250lm/2750lm ↓	19W/21W ↓	On/off
BEZC-4503021-VN	11250lm/2750lm ↓	19W/21W ↓	1-10V dimming
BEZC-4503021-DN	11250lm/2750lm ↓	19W/21W ↓	DALI dimming
BEZC-6004040-NN	5410lm ↓	40W ↓	On/off
BEZC-6004040-VN	5410lm ↓	40W ↓	1-10V dimming
BEZC-6004040-DN	5410lm ↓	40W ↓	DALI dimming
BEZC-6004834-NN	11500lm/5220lm ↓	114W/34W ↓	On/off
BEZC-6004834-VN	11500lm/5220lm ↓	114W/34W ↓	1-10V dimming
BEZC-6004834-DN	11500lm/5220lm ↓	114W/34W ↓	DALI dimming


## LIGHT DISTRIBUTION

Luminaire Wattage	18W	30W	30W	40W	48W
Luminous Flux	2340lm	3900lm	4000lm	5410lm	6720lm
CCT	3000K / 4000K / 6000K				
CRI	>80				
UGR	<19	<21	<19	<21	<19
Protection Rating	IP20				
Longevity	50,000Hrs L80 B10				
Function	On/off / 1-10V dimming / DALI dimming				
Colours	Silver / White / Black				
Warranty	5 years				

## SIZE



## LIGHT DISTRIBUTION






# KEY-C

## APPLICATIONS:

Open-plan office, reception room,  
training room, cafeteria, etc.

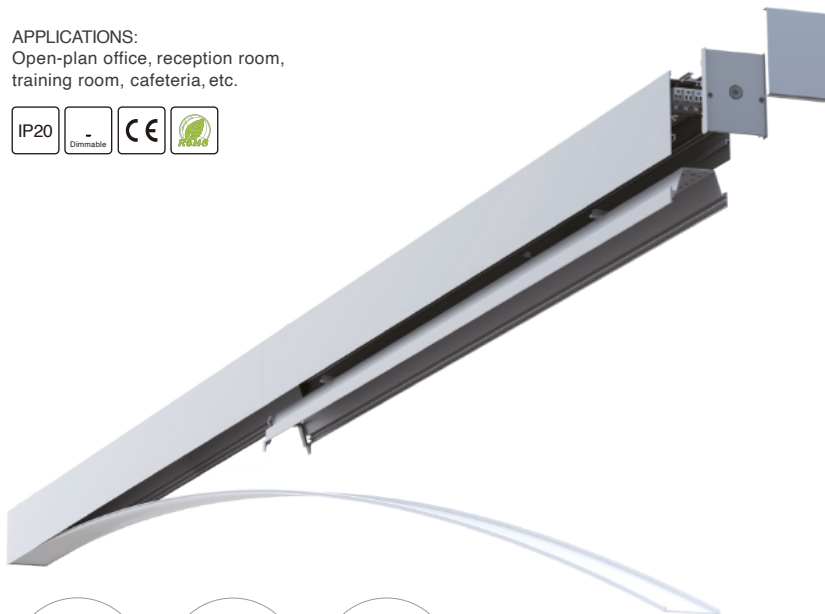

Light efficiency could  
be 120LM/W

Flexible microprism plate

Linkable and no  
light leakage


## PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	4800lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

## PRODUCT MODEL

Part No.	LM	Power	Function
BKEC-120404-NN	4800lm	40W	On/off
BKEC-120404-VN	4800lm	40W	1-10V dimming
BKEC-120404-DN	4800lm	40W	DALI dimming
BKEC-150505-NN	6000lm	50W	On/off
BKEC-150505-VN	6000lm	50W	1-10V dimming
BKEC-150505-DN	6000lm	50W	DALI dimming

## SIZE

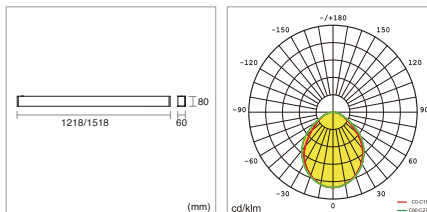




slightly different


# FREE-C

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.

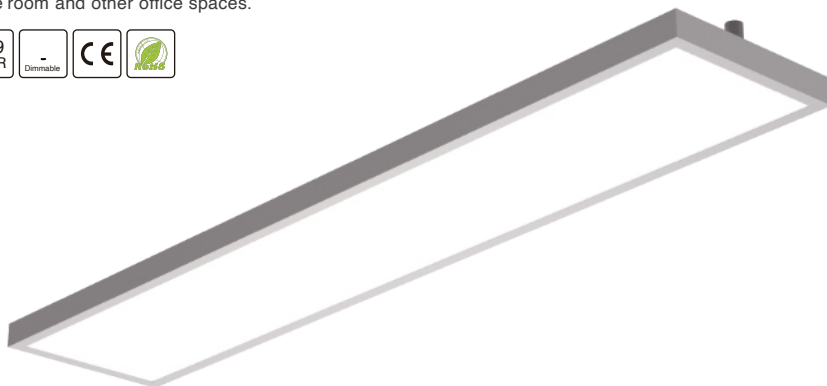

Microprism  
UGR<19



Direct and indirect  
lighting with impressive  
light uniformity



Support DALI and  
1-10V dimming


## PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	5200lm	6300lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BFRC-1205040-NN	T1300lm/3900lm ↓	T110W / 40W ↓	On/off
BFRC-1205040-VN	T1300lm/3900lm ↓	T110W / 40W ↓	1-10V dimming
BFRC-1205040-DN	T1300lm/3900lm ↓	T110W / 40W ↓	DALI dimming
BFRC-1506048-NN	T1500lm/4800lm ↓	T12W / 48W ↓	On/off
BFRC-1506048-VN	T1500lm/4800lm ↓	T12W / 48W ↓	1-10V dimming
BFRC-1506048-DN	T1500lm/4800lm ↓	T12W / 48W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION








slightly different


# WASE-C

## APPLICATIONS:


Open-plan office, training room, stairway, corridors, etc.

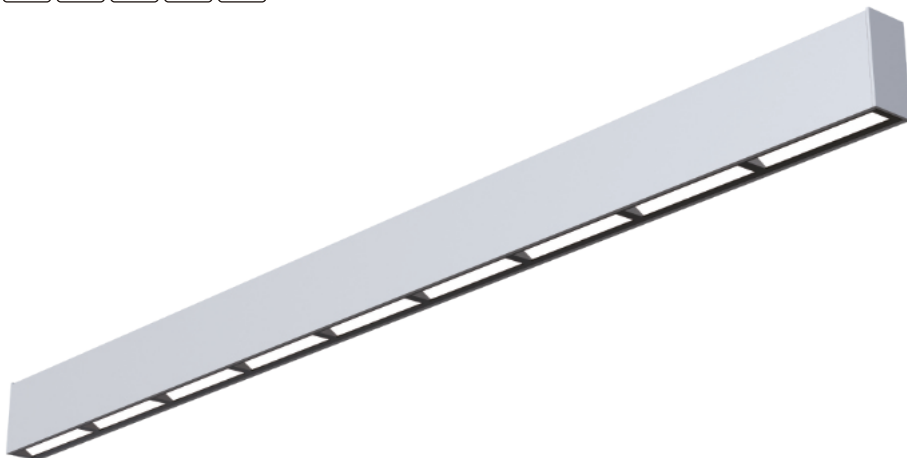

Polarized light design, extremely low glare



Push in and push out solution, easy to install and maintain



Linkable and easy for maintenance


## PRODUCT PARAMETERS

Luminaire Wattage	30W
Luminous Flux	2800 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BWAC-1203030-NN	2800lm	30W	On/off
BWAC-1203030-VN	2800lm	30W	1-10V dimming
BWAC-1203030-DN	2800lm	30W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION






slightly different

# ROMI-C

## APPLICATIONS:

Open-plan office, individual office, cafeteria, corridors, break-out area, classroom, etc.



- Microprism, UGR<18
- Extremely simple for installation and maintenance
- Come with several size Ø350 / Ø450 / Ø600 / Ø900




## PRODUCT MODEL

Part No.	LM	Power	Function
BROC-3501812-NN	1500lm/1200lm ↓	16W/12W ↓	On/off
BROC-3501812-VN	1500lm/1200lm ↓	16W/12W ↓	1-10V dimming
BROC-3501812-DN	1500lm/1200lm ↓	16W/12W ↓	DALI dimming
BROC-4503021-NN	11100lm/2200lm ↓	19W/21W ↓	On/off
BROC-4503021-VN	11100lm/2200lm ↓	19W/21W ↓	1-10V dimming
BROC-4503021-DN	11100lm/2200lm ↓	19W/21W ↓	DALI dimming
BROC-6004834-NN	11960lm/3800lm ↓	114W/34W ↓	On/off
BROC-6004834-VN	11960lm/3800lm ↓	114W/34W ↓	1-10V dimming
BROC-6004834-DN	11960lm/3800lm ↓	114W/34W ↓	DALI dimming
BROC-9008056-NN	13400lm/6200lm ↓	124W/56W ↓	On/off
BROC-9008056-VN	13400lm/6200lm ↓	124W/56W ↓	1-10V dimming
BROC-9008056-DN	13400lm/6200lm ↓	124W/56W ↓	DALI dimming


## PRODUCT PARAMETERS

Luminaire Wattage	18W	30W	48W	80W
Luminous Flux	1700lm	3300lm	5760lm	9600lm
OCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<18			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

## SIZE



## LIGHT DISTRIBUTION






# ELFOO-C

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.

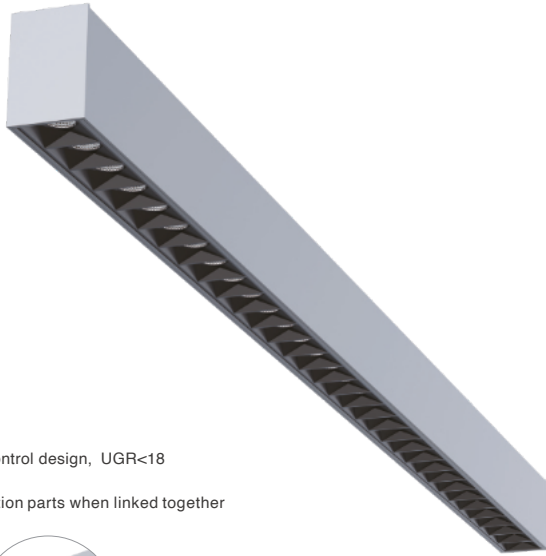

- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together




## PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFC-1203030-NN	3200lm	30W	On/off
BEFC-1203030-VN	3200lm	30W	1-10V dimming
BEFC-1203030-DN	3200lm	30W	DALI dimming
BEFC-1503535-NN	3600lm	35W	On/off
BEFC-1503535-VN	3600lm	35W	1-10V dimming
BEFC-1503535-DN	3600lm	35W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# ELFOO-C3

## APPLICATIONS:

Open-plan office, training room, conference room and other office spaces.

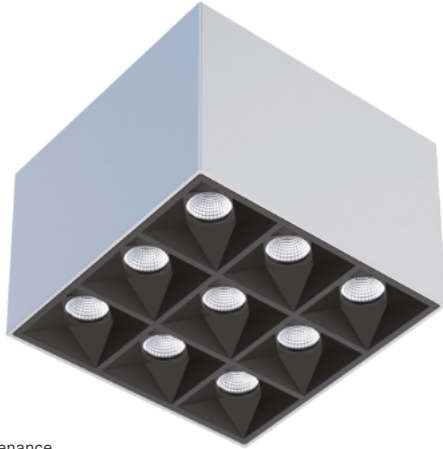

- Push-in and push-out structure, easy for installation and maintenance
- Perfect glare control, low UGR
- Support DALI and 1-10V dimming




## PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<17	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFK-1200808-NN	850lm	8W	On/off
BEFK-1200808-VN	850lm	8W	1-10V dimming
BEFK-1200808-DN	850lm	8W	DALI dimming
BEFK-1201818-NN	1900lm	18W	On/off
BEFK-1201818-VN	1900lm	18W	1-10V dimming
BEFK-1201818-DN	1900lm	18W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# LICON-C

## APPLICATIONS:


Open-plan office, training room,  
conference room and other office spaces.

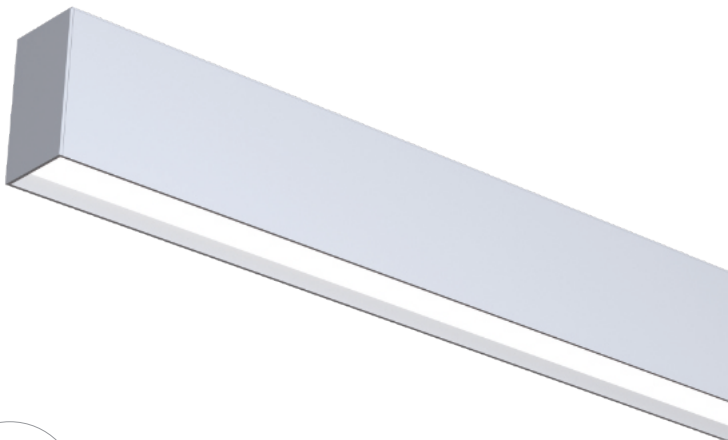

Simple and delicate design



Easy for maintenance



Simple, easy and quick installation


## PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	3600lm	4500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<22	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BLIC-120404-NN	3600lm	40W	On/off
BLIC-120404-VN	3600lm	40W	1-10V dimming
BLIC-120404-DN	3600lm	40W	DALI dimming
BLIC-1505050-NN	4500lm	50W	On/off
BLIC-1505050-VN	4500lm	50W	1-10V dimming
BLIC-1505050-DN	4500lm	50W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION






slightly different

# LENO-C1

## APPLICATIONS:

Open-plan office, individual office, small meeting room, reception, etc.

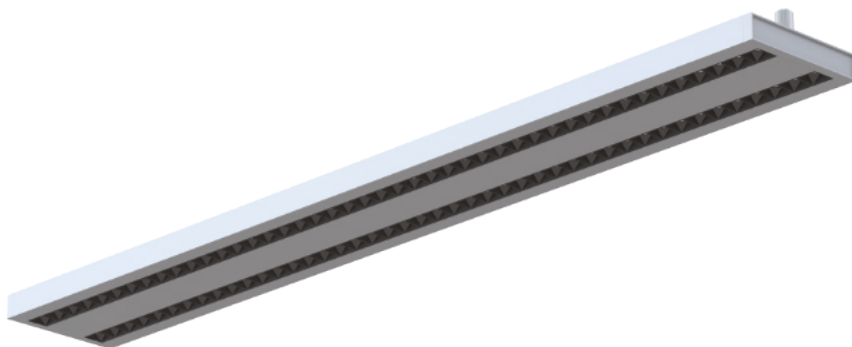

- Microprism, UGR<10
- Simple surface mounted solutions, easy for installation and maintenance
- Support DALI and 1-10V dimming


## PRODUCT PARAMETERS

Luminaire Wattage	40W
Luminous Flux	4500lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	50°
UGR	<10
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BLEC1-1204040-NN	4500lm	40W	On/off
BLEC1-1204040-VN	4500lm	40W	1-10V dimming
BLEC1-1204040-DN	4500lm	40W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







slightly different

# LENO-C2

## APPLICATIONS:

Open-plan office, individual office,  
small meeting room, reception room, etc.

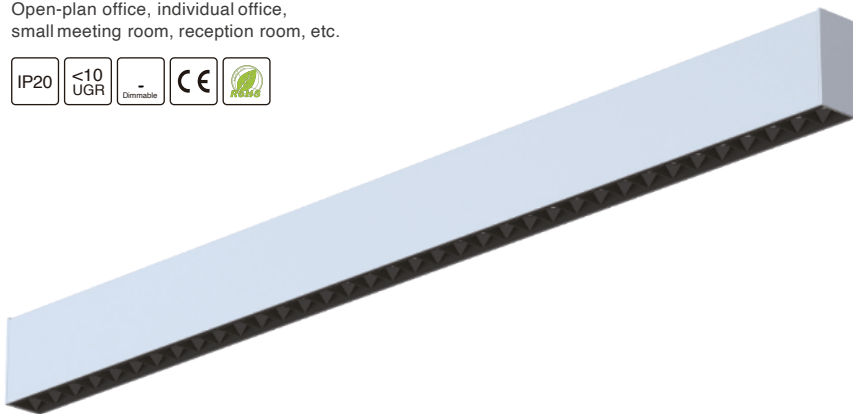

Micro reflector design  
UGR<10



Push-in and push-out structure,  
easy for installation  
and maintenance


## PRODUCT PARAMETERS

Luminaire Wattage	30W	40W
Luminous Flux	3000lm	4000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	50°	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BLEC2-0903030-NN	3000lm	30W	On/off
BLEC2-0903030-VN	3000lm	30W	1-10V dimming
BLEC2-0903030-DN	3000lm	30W	DALI dimming
BLEC2-1204040-NN	4000lm	40W	On/off
BLEC2-1204040-VN	4000lm	40W	1-10V dimming
BLEC2-1204040-DN	4000lm	40W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION






# MAYE-CR0

## APPLICATIONS:

Open-plan office, training room, stairway, corridors, etc.

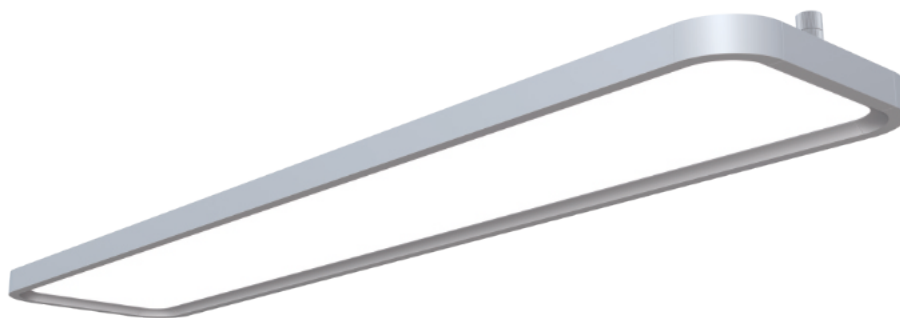

- Microprism, UGR<19
- Direct and Indirect lighting with impressivelight uniformity
- Easyfor installation and maintenance




## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5400 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BMRC-1206050-NN	11200lm/4200lm ↓	110W/50W ↓	On/off
BMRC-1206050-VN	11200lm/4200lm ↓	110W/50W ↓	1-10V dimming
BMRC-1206050-DN	11200lm/4200lm ↓	110W/50W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION





# MAYE-CR1

## APPLICATIONS:

Open-plan office, training room, stairway, corridors, etc.



- Microprism, UGR<19
- Direct and Indirect lighting with impressivelight uniformity
- Easyfor installation and maintenance




## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5700 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BMRC-6106050-NN	11450lm/4250lm ↓	110W/50W ↓	On/off
BMRC-6106050-VN	11450lm/4250lm ↓	110W/50W ↓	1-10V dimming
BMRC-6106050-DN	11450lm/4250lm ↓	110W/50W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION





# MAYE-CS0

## APPLICATIONS:

Open-plan office, training room, stairway, corridors, etc.



- Microprism, UGR<19
- Direct and Indirect lighting with impressivelight uniformity
- Easyfor installation and maintenance




## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5700 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BMSC-1206050-NN	T1200lm/4500lm ↓	110W/50W ↓	On/off
BMSC-1206050-VN	T1200lm/4500lm ↓	110W/50W ↓	1-10V dimming
BMSC-1206050-DN	T1200lm/4500lm ↓	110W/50W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION





# MAYE-CS1

## APPLICATIONS:

Open-plan office, breakout area, cafeteria, guest room, etc.



- Microprism, UGR<19
- Direct and Indirect lighting with impressive light uniformity
- Easy for installation and maintenance




## PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5300 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BMSC-6106050-NN	11300lm/4000lm ↓	110W/50W ↓	On/off
BMSC-6106050-VN	11300lm/4000lm ↓	110W/50W ↓	1-10V dimming
BMSC-6106050-DN	11300lm/4000lm ↓	110W/50W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION






05

# RECESSED LUMINAIRES

APPLICATIONS:

Open-plan office, training room,  
conference room and classroom, etc.





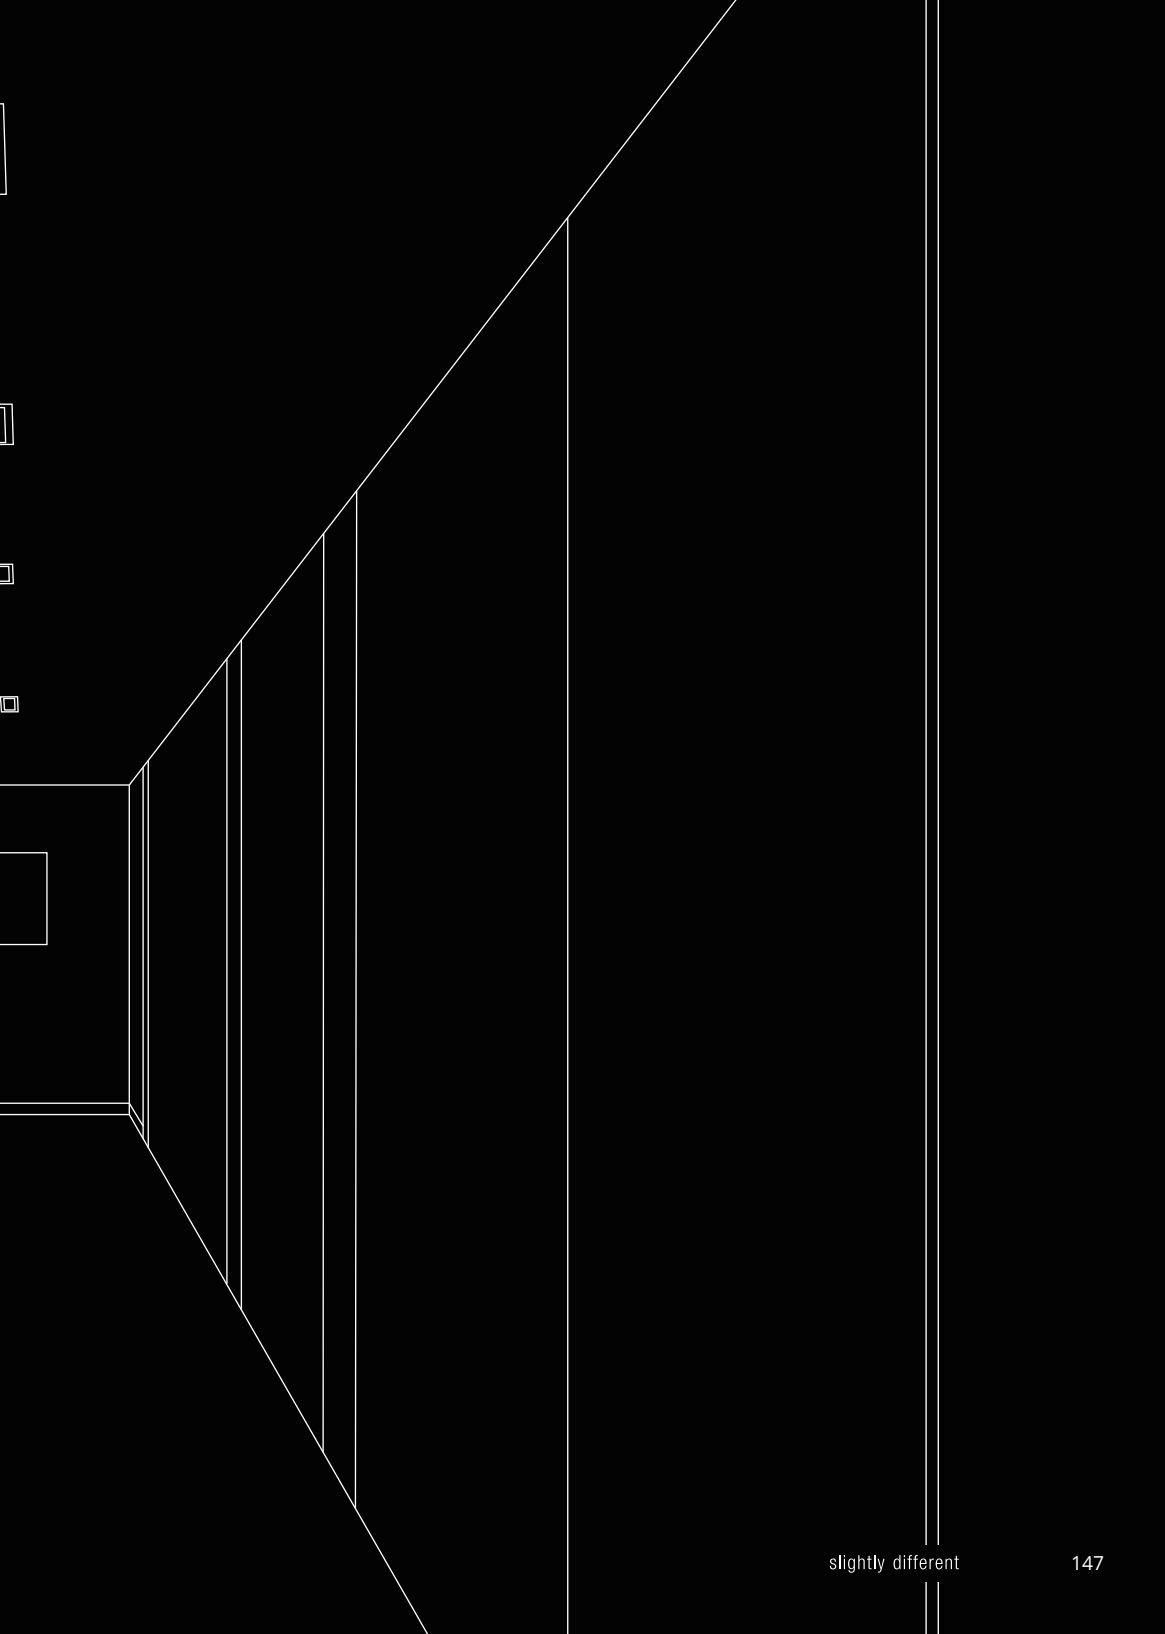

# EZY-R

## APPLICATIONS:

Open-plan office, small office, meeting rooms, cafeterias, foyers and lobbies, corridors, staircases, etc.



Recessedround luminaire available in 462/612mm diameter sizes



Easy installation and maintenance with complete fixture setup



Suitable for ceiling thickness range of 3-40mm


## PRODUCT MODEL

Part No.	LM	Power	Function
BEZR-4501515-NN-01	1950lm	15W	On/off
BEZR-4501515-DN-01	1950lm	15W	DALI dimming
BEZR-6002828-NN-01	3920lm	28W	On/off
BEZR-6002828-DN-01	3920lm	28W	DALI dimming
BEZR-4503030-NN	4350lm	30W	On/off
BEZR-4503030-DN	4350lm	30W	DALI dimming
BEZR-6004040-NN	5890lm	40W	On/off
BEZR-6004040-DN	5890lm	40W	DALI dimming

## PRODUCT PARAMETERS

Luminaire Wattage	15W	28W	30W	40W
Luminous Flux	1950lm	3920lm	4350lm	5890lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<20		<25	
Protection Rating	IP40			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

## SIZE


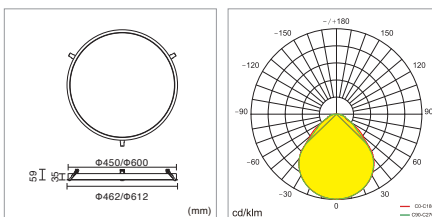




# KEY-R

## APPLICATIONS:

Open-plan office, small office, meeting room, reception area, etc.

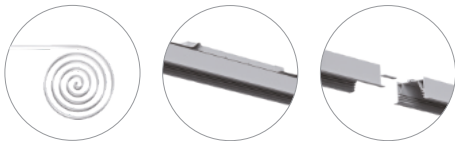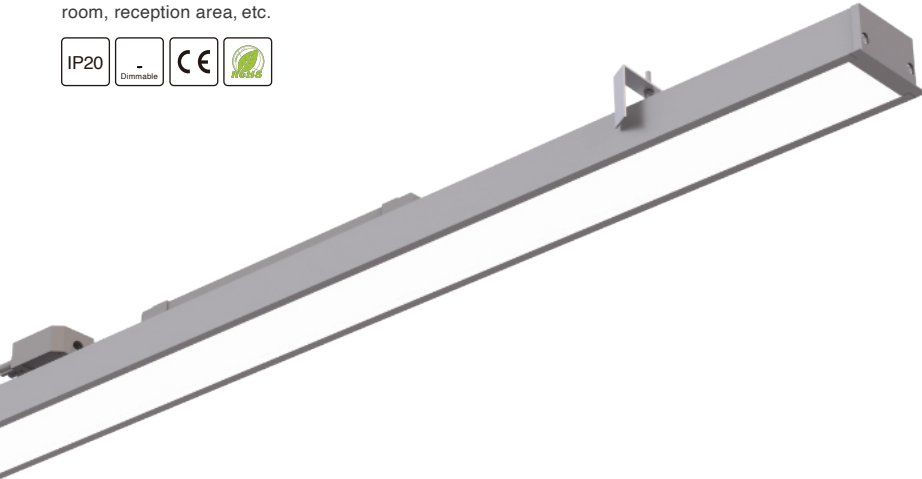

Flexible prismatic plate

Support for smart control functions

Linkable design solution


## PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	4400lm	5500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

## PRODUCT MODEL

Part No.	LM	Power	Function
BKEY-1204040-NN	4400lm	40W	On/off
BKEY-1204040-VN	4400lm	40W	1-10V dimming
BKEY-1204040-DN	4400lm	40W	DALI dimming
BKEY-1505050-NN	5500lm	50W	On/off
BKEY-1505050-VN	5500lm	50W	1-10V dimming
BKEY-1505050-DN	5500lm	50W	DALI dimming

## SIZE

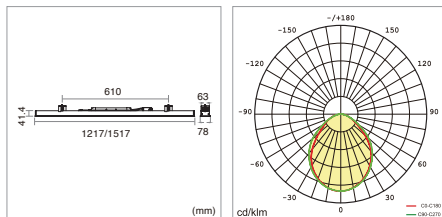





# ELFOO-R0

## APPLICATIONS:

Open-plan office, training room conference room and classroom, etc.

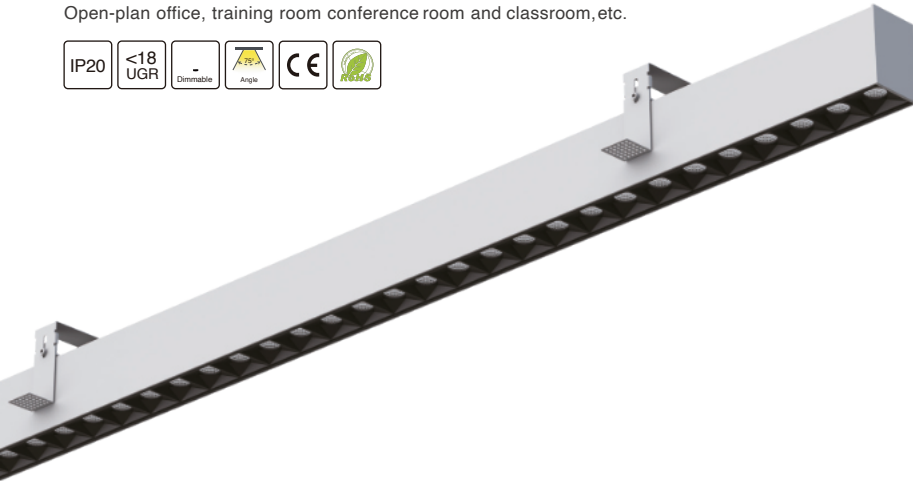

- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together
- Support for smart control functions




## PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFX-1203030-NN	3200lm	30W	On/off
BEFX-1203030-VN	3200lm	30W	1-10V dimming
BEFX-1203030-DN	3200lm	30W	DALI dimming
BEFX-1503535-NN	3600lm	35W	On/off
BEFX-1503535-VN	3600lm	35W	1-10V dimming
BEFX-1503535-DN	3600lm	35W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION






# ELFOO-R1

## APPLICATIONS:

Open-plan office, training room, conference room and classroom, etc.



- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from the connection parts when linked together
- Support for smart control functions




## PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFY-1203030-NN	3200lm	30W	On/off
BEFY-1203030-VN	3200lm	30W	1-10V dimming
BEFY-1203030-DN	3200lm	30W	DALI dimming
BEFY-1503535-NN	3600lm	35W	On/off
BEFY-1503535-VN	3600lm	35W	1-10V dimming
BEFY-1503535-DN	3600lm	35W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# ELFOO-D2

## APPLICATIONS:

For office corridor, washroom, staircase, etc.

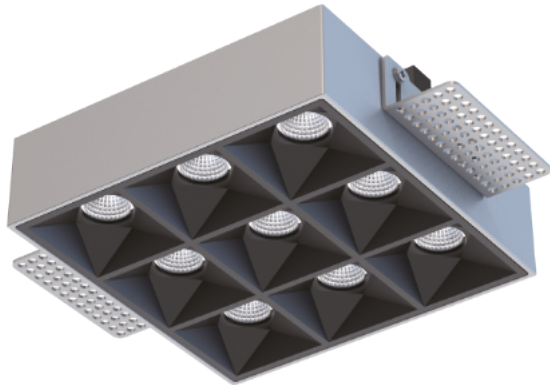

- Push-in-push-out structure, easy for installation and maintenance
- Support DALI and 1-10V dimming
- Perfect glare control, low UGR




## PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFS-1200808-NN	850lm	8W	On/off
BEFS-1200808-VN	850lm	8W	1-10V dimming
BEFS-1200808-DN	850lm	8W	DALI dimming
BEFS-1201818-NN	1900lm	18W	On/off
BEFS-1201818-VN	1900lm	18W	1-10V dimming
BEFS-1201818-DN	1900lm	18W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION






# ELFOO-D3

## APPLICATIONS:

Open-plan office, training room,  
conference room and other office space.



- Push-in-push-out structure, easy for installation and maintenance
- Support DALI and 1-10V dimming
- Perfect glare control, low UGR




## PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-1400808-NN	850lm	8W	On/off
BEFQ-1400808-VN	850lm	8W	1-10V dimming
BEFQ-1400808-DN	850lm	8W	DALI dimming
BEFQ-1401818-NN	1900lm	18W	On/off
BEFQ-1401818-VN	1900lm	18W	1-10V dimming
BEFQ-1401818-DN	1900lm	18W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION





# ELFOO-D4

## APPLICATIONS:

Office corridor, washroom, staircase, etc.



- Perfect glare control, low UGR
- Support DALI and 1-10V dimming
- 5 years warranty


## PRODUCT PARAMETERS

Luminaire Wattage	6W
Luminous Flux	778lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	55°
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-1800606-NN	778lm	6W	On/off
BEFQ-1800606-VN	778lm	6W	1-10V dimming
BEFQ-1800606-DN	778lm	6W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION





# ELFOO-D5

## APPLICATIONS:

Office corridor, washroom, staircase, etc.



- Perfect glare control, low UGR
- Support DALI and 1-10V dimming
- 5 years warranty


## PRODUCT PARAMETERS

Luminaire Wattage	12W
Luminous Flux	1552lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	55°
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-3401212-NN	1552lm	12W	On/off
BEFQ-3401212-VN	1552lm	12W	1-10V dimming
BEFQ-3401212-DN	1552lm	12W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# WASE-R

## APPLICATIONS:

Open-plan office, training room, stairs, corridors, etc.



- Push-in-push-out solution offers, offering an impressive simple and nice installation experience
- Linkable and easy for maintenance
- Wash 3 meter's wall with impressive uniformity light
- Offering great compensation light for office space
- Polarized light design, extremely low glare

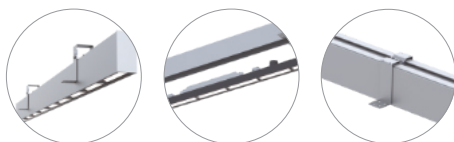


## PRODUCT PARAMETERS

Luminaire Wattage	30W
Luminous Flux	2800lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BWAX-1203030-NN	2800lm	30W	On/off
BWAX-1203030-VN	2800lm	30W	1-10V dimming
BWAX-1203030-DN	2800lm	30W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION






slightly different

# LENO-R0

## APPLICATIONS:

Open-plan office, small office, meeting room, reception area.

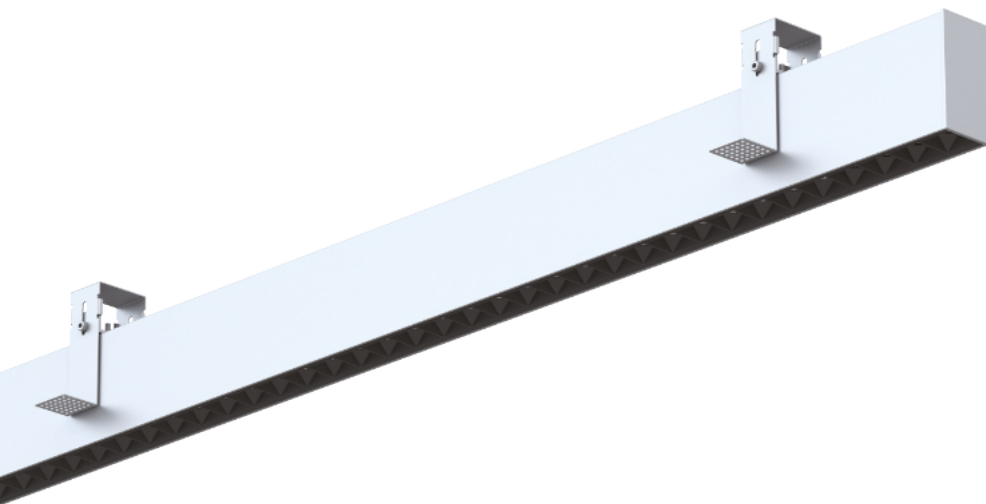

- Push-in-push-out structure, easy for installation and maintenance
- Linkable trimless recessed mounted profiles system without connection gap
- Support tunable white


## PRODUCT MODEL

Part No.	LM	Power	Function
BLEX-0903030-NN	3000lm	30W	On/off
BLEX-0903030-VN	3000lm	30W	1-10V dimming
BLEX-0903030-DN	3000lm	30W	DALI dimming
BLEX-1204040-NN	4000lm	40W	On/off
BLEX-1204040-VN	4000lm	40W	1-10V dimming
BLEX-1204040-DN	4000lm	40W	DALI dimming


## PRODUCT PARAMETER

Luminaire Wattage	30W	40W
Luminous Flux	3000lm	4000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	50°	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

## SIZE



## LIGHT DISTRIBUTION






# LENO-R1

## APPLICATIONS:

Open-plan office, small office, meeting room, reception area.

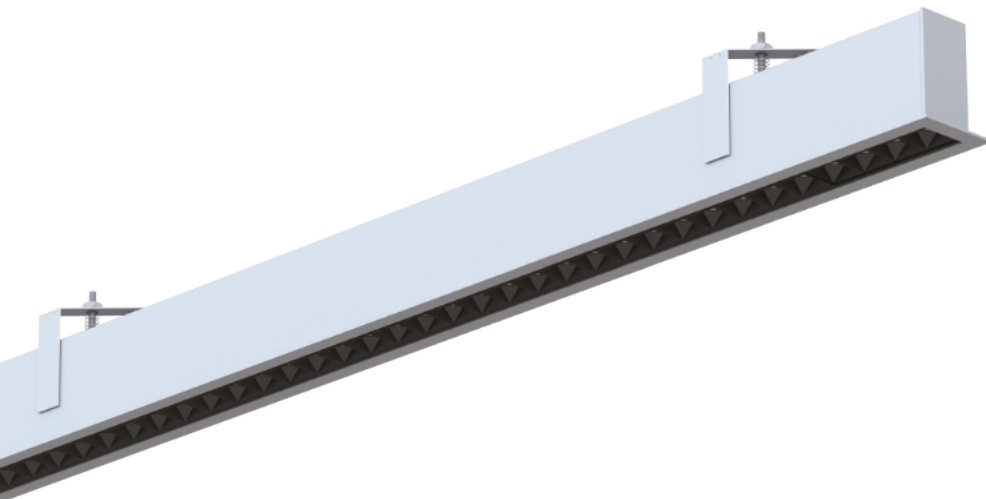

- Push-in-push-out structure, easy for installation and maintenance
- Linkable trimless recessed mounted profiles system without connection gap
- Support tunable white


## PRODUCT PARAMETER

Luminaire Wattage	30W	40W
Luminous Flux	3000lm	4000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	50°	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BLEY-0903030-NN	3000lm	30W	On/off
BLEY-0903030-VN	3000lm	30W	1-10V dimming
BLEY-0903030-DN	3000lm	30W	DALI dimming
BLEY-1204040-NN	4000lm	40W	On/off
BLEY-1204040-VN	4000lm	40W	1-10V dimming
BLEY-1204040-DN	4000lm	40W	DALI dimming

## SIZE



## LIGHT DISTRIBUTION








06

# WALL MOUNTED LUMINAIRES

## APPLICATIONS:


Open-plan office, stairs, corridors and  
other office space.

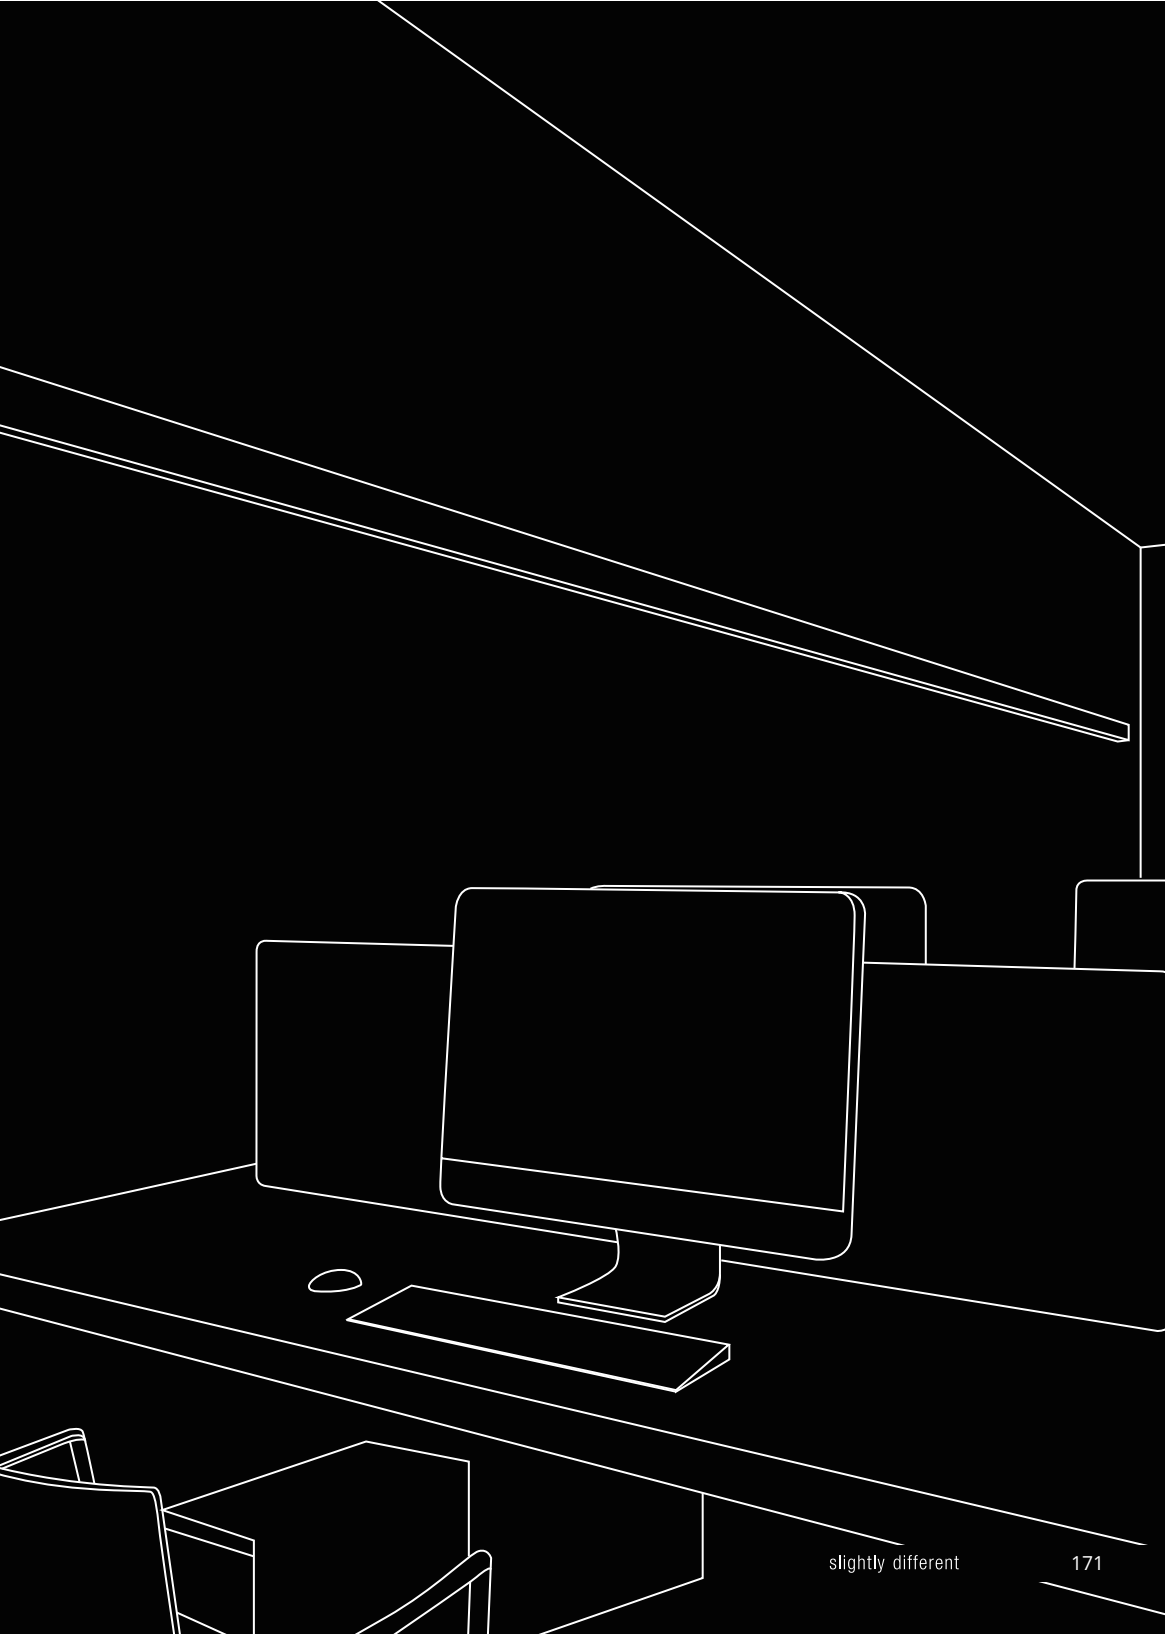

# NEWA

## APPLICATIONS:

Open-plan office, stairs, corridors and other office space.

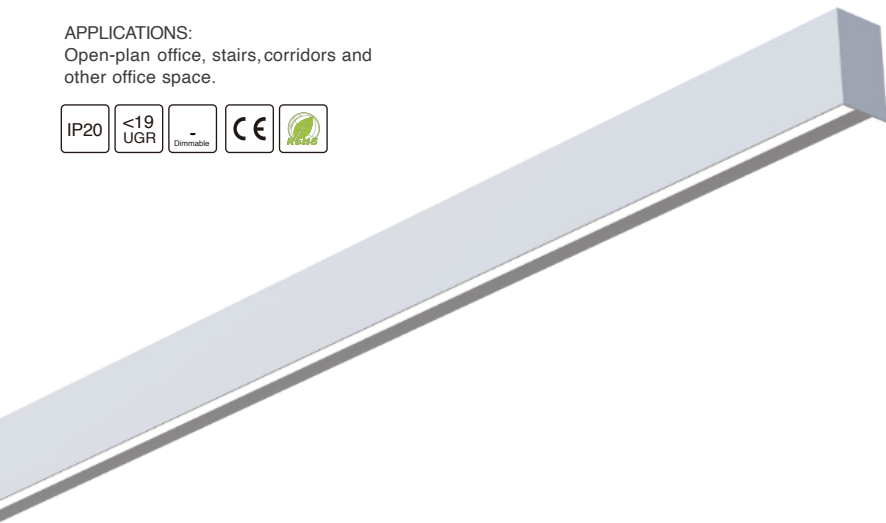

- Linkable wall lamp to avoid wiring problems, one input can support 30 meters
- Both direct and indirect light can wash the wall with 650mm height, uniformity light, low glare
- Impressive easy for installation and maintenance
- High lumen efficiency, up to 120LM/W




## PRODUCT PARAMETER

Luminaire Wattage	30W	50W
Luminous Flux	3600lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


## PRODUCT MODEL

Part No.	LM	Power	Function
BNEW-1203015-NN	11800lm/1800lm ↓	115W/15W ↓	On/off
BNEW-1203015-VN	11800lm/1800lm ↓	115W/15W ↓	1-10V dimming
BNEW-1203015-DN	11800lm/1800lm ↓	115W/15W ↓	DALI dimming
BNEW-1805025-NN	13000lm/3000lm ↓	125W/25W ↓	On/off
BNEW-1805025-VN	13000lm/3000lm ↓	125W/25W ↓	1-10V dimming
BNEW-1805025-DN	13000lm/3000lm ↓	125W/25W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION





# LICON-W

## APPLICATIONS:

Open-plan office, stairs, corridors and other office spaces.



- Linkable wall lamp to avoid wiring problems, one input can support 30 meters
- Impressive easy for installation and maintenance




## PRODUCT MODEL

Part No.	LM	Power	Function
BLIW-1204020-NN	11800lm/1800lm ↓	120W/20W ↓	On/off
BLIW-1204020-VN	11800lm/1800lm ↓	120W/20W ↓	1-10V dimming
BLIW-1204020-DN	11800lm/1800lm ↓	120W/20W ↓	DALI dimming
BLIW-1505025-NN	12250lm/2250lm ↓	125W/25W ↓	On/off
BLIW-1505025-VN	12250lm/2250lm ↓	125W/25W ↓	1-10V dimming
BLIW-1505025-DN	12250lm/2250lm ↓	125W/25W ↓	DALI dimming
BLIW-1806030-NN	12700lm/2700lm ↓	130W/30W ↓	On/off
BLIW-1806030-VN	12700lm/2700lm ↓	130W/30W ↓	1-10V dimming
BLIW-1806030-DN	12700lm/2700lm ↓	130W/30W ↓	DALI dimming


## PRODUCT PARAMETER

Luminaire Wattage	40W	50W	60W
Luminous Flux	3600lm	4500lm	5400lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / 1-10V dimming / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		

## SIZE



## LIGHT DISTRIBUTION






# MAYE-WR

## APPLICATIONS:

Open-plan office, stairs, corridors, lobby, break out area etc.

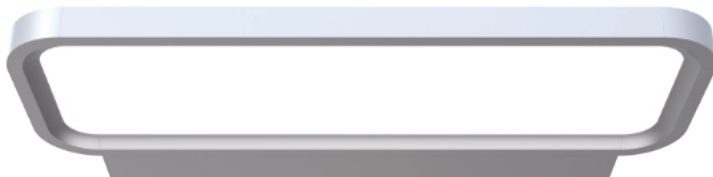

- Direct and indirect lighting with impressive light uniformity
- Widely used in public working area with UGR<18
- Easy for installation and maintenance
- High lumen output with 90LM/W


## PRODUCT PARAMETER

Luminaire Wattage	40W
Luminous Flux	3600 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BMRW-6104020-NN	11800lm/1800lm↓	120W/20W ↓	On/off
BMRW-6104020-VN	11800lm/1800lm↓	120W/20W ↓	1-10V dimming
BMRW-6104020-DN	11800lm/1800lm↓	120W/20W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION





slightly different

# MAYE-WS

## APPLICATIONS:

Open-plan office, stairs, corridors, lobby, break out area etc.



- Direct and indirect lighting with impressive light uniformity
- Widely used in public working area with UGR<18
- Easy for installation and maintenance
- High lumen output with 90LM/W


## PRODUCT PARAMETER

Luminaire Wattage	40W
Luminous Flux	3600 lm
CCT	3000K / 4000K / 6000K
CRi	>80
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


## PRODUCT MODEL

Part No.	LM	Power	Function
BMSW-6104020-NN	11800lm/1800lm ↓	120W/20W ↓	On/off
BMSW-6104020-VN	11800lm/1800lm ↓	120W/20W ↓	1-10V dimming
BMSW-6104020-DN	11800lm/1800lm ↓	120W/20W ↓	DALI dimming

## SIZE



## LIGHT DISTRIBUTION







# ARCHITECTURE GARDEN LIGHTING

---

02.



---

BOLLARDS	182
FLOODLIGHTS	200
WALL LUMINAIRES	206
CEILING LUMINAIRES	218
WALL RECESSEDLUMINAIRES	222
TABLE LAMPS	228


# 01

## BOLLARDS

Bole is a range of high-quality IP65 bollard light with a contemporary and classic design. The fixture is with die-casting head, extrusion aluminum body and pc optical concept, sophisticated surface finish gives a high-end appearance of texture. Thanks to perfect powder coating, our bollards have TUV C5 certificates for tough weather conditions, resistance seawater resistance.

Bole range is available in Round/ Square/ Mushroom designs, and each design has 250mm, 600mm, 1000mm BOLE reaches 10 meters. 1000mm BOLE The professional optical solution offers a fully anti-glare and comfortable light uniformity, reaches 10 meters diameter wide light distribution but with a very narrow dark zone under the fixture. Support for smart control such as DALI2, bluetooth, CAMSAMBI, SWARM, HCL, etc.

main applications in architectural buildings including commercial buildings, corporate headquarters, parks, recreational areas and gardens.

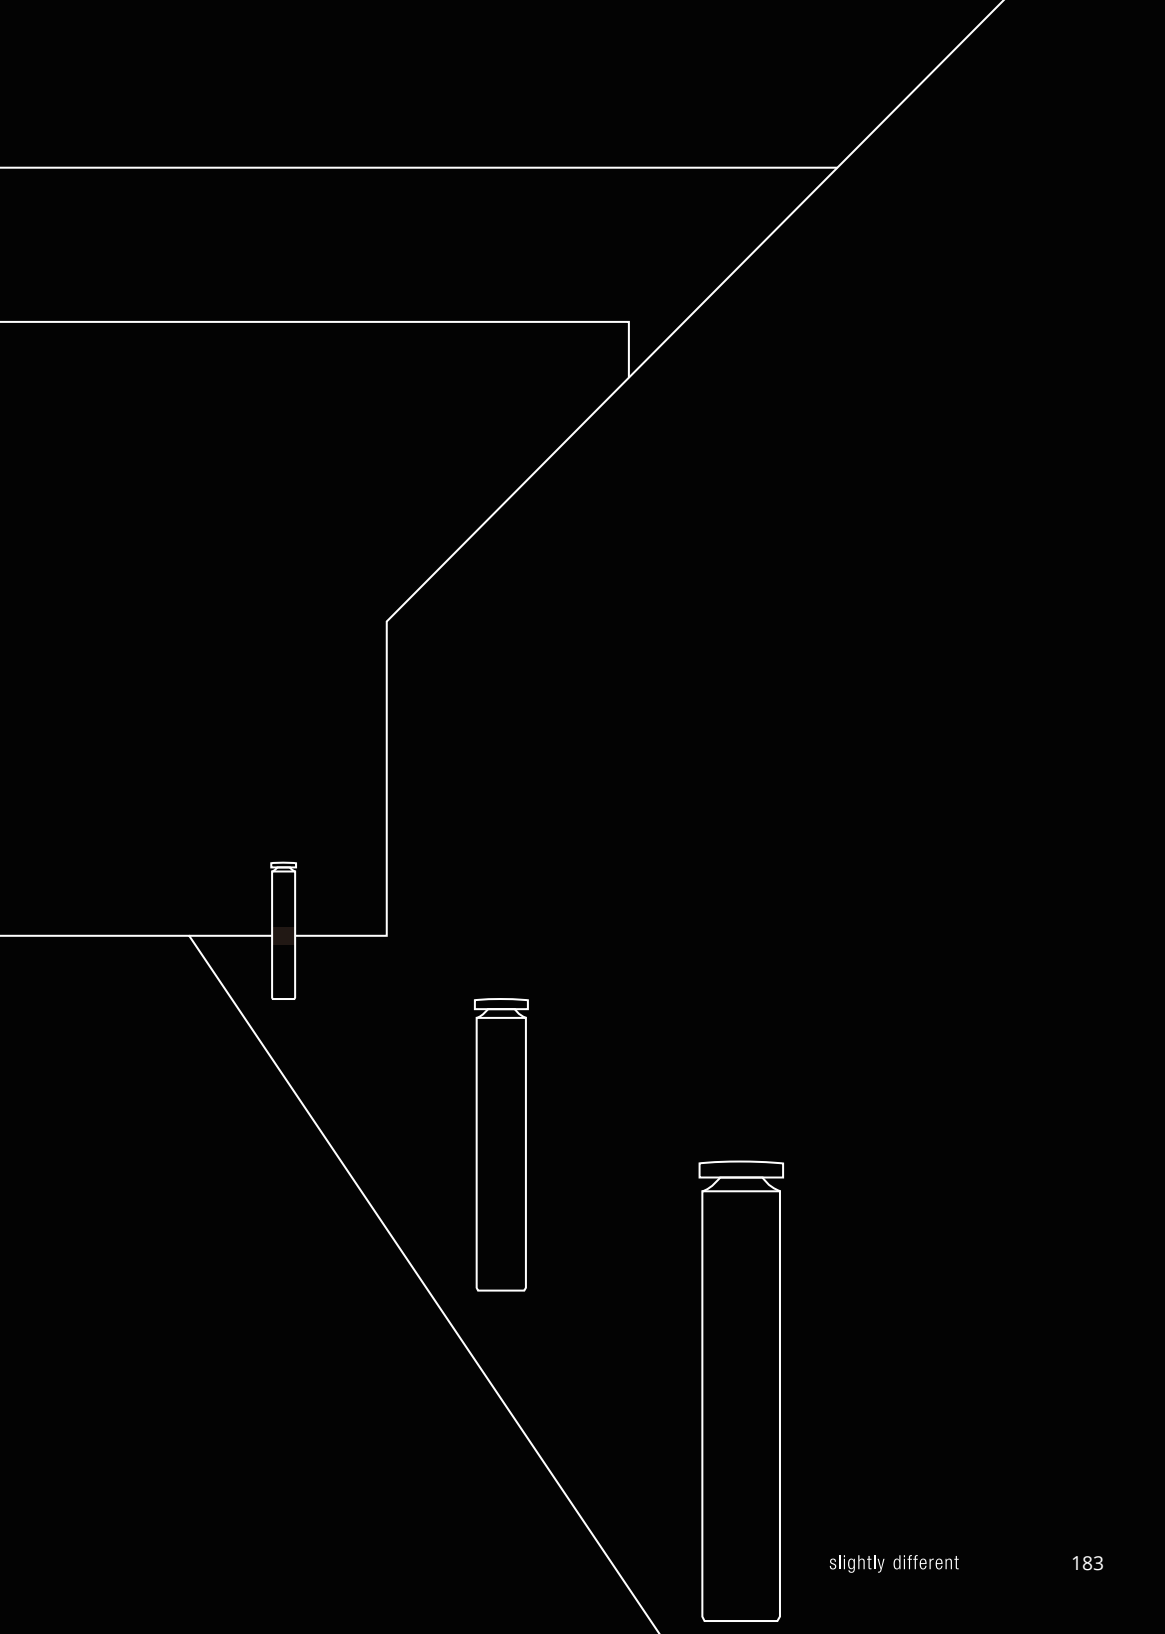

slightly different

# BUTTON-L

---

## APPLICATIONS:

Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- Large angle light distribution
- No glare, long range, uniform light
- Small size






## BUTTON-L

### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1TL1-20280-NN	2000lm	20W	2700K	On/off
B1TL1-20380-NN	2000lm	20W	3000K	On/off
B1TL1-20580-NN	2000lm	20W	4000K	On/off
B1TL1-20280-DN	2000lm	20W	2700K	DALI
B1TL1-20380-DN	2000lm	20W	3000K	DALI
B1TL1-20580-DN	2000lm	20W	4000K	DALI

### SIZE




## BUTTON-L

### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1TL0-10280-NN	1000lm	10W	2700K	On/off
B1TL0-10380-NN	1000lm	10W	3000K	On/off
B1TL0-10580-NN	1000lm	10W	4000K	On/off
B1TL0-10280-DN	1000lm	10W	2700K	DALI
B1TL0-10380-DN	1000lm	10W	3000K	DALI
B1TL0-10580-DN	1000lm	10W	4000K	DALI

### SIZE



# SHOW-L

## APPLICATIONS:

Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- Polarized optics, wide range of light distribution , no upward light
- Small size
- Motion sensor version optional






## SHOW-L

### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SH1-10280-NN	900lm	10W	2700K	On/off	No
B1SH1-10380-NN	900lm	10W	3000K	On/off	No
B1SH1-10580-NN	900lm	10W	4000K	On/off	No
B1SH1-10280-DN	900lm	10W	2700K	DALI	No
B1SH1-10380-DN	900lm	10W	3000K	DALI	No
B1SH1-10580-DN	900lm	10W	4000K	DALI	No
B1SH1-10280-DM	900lm	10W	2700K	DALI	Motion sensor
B1SH1-10380-DM	900lm	10W	3000K	DALI	Motion sensor
B1SH1-10580-DM	900lm	10W	4000K	DALI	Motion sensor

### SIZE




## SHOW-L

### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SH0-05280-NN	450lm	5W	2700K	On/off	No
B1SH0-05380-NN	450lm	5W	3000K	On/off	No
B1SH0-05580-NN	450lm	5W	4000K	On/off	No
B1SH0-05280-DN	450lm	5W	2700K	DALI	No
B1SH0-05380-DN	450lm	5W	3000K	DALI	No
B1SH0-05580-DN	450lm	5W	4000K	DALI	No
B1SH0-05280-DM	450lm	5W	2700K	DALI	Motion sensor
B1SH0-05380-DM	450lm	5W	3000K	DALI	Motion sensor
B1SH0-05580-DM	450lm	5W	4000K	DALI	Motion sensor

### SIZE



# BOLE-M

## APPLICATIONS:

Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- No glare/Light emission 360°
- No glare, long range, uniform light






## BOLE-M1


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BM1-12280-NN	736lm	12W	2700K	On/off
B1BM1-12380-NN	736lm	12W	3000K	On/off
B1BM1-12580-NN	736lm	12W	4000K	On/off
B1BM1-12280-DN	736lm	12W	2700K	DALI
B1BM1-12380-DN	736lm	12W	3000K	DALI
B1BM1-12580-DN	736lm	12W	4000K	DALI

### SIZE



### LIGHT DISTRIBUTION




## BOLE-M0


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BM0-06280-NN	385lm	6.5W	2700K	On/off
B1BM0-06380-NN	385lm	6.5W	3000K	On/off
B1BM0-06580-NN	385lm	6.5W	4000K	On/off
B1BM0-06280-DN	385lm	6.5W	2700K	DALI
B1BM0-06380-DN	385lm	6.5W	3000K	DALI
B1BM0-06580-DN	385lm	6.5W	4000K	DALI

### SIZE




### LIGHT DISTRIBUTION




# BOLE-R

## APPLICATIONS:

Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



No glare/  
Light emission 360° or  
optionally 180°




Long range



Uniform light





## BOLE-R2

### PRODUCT MODEL


Optics with 360 °emission

Part No.	LM	Power	CCT	Dimming
B1BR2-24280-NN	1124lm	24W	2700K	On/off
B1BR2-24280-DN	1124lm	24W	2700K	Dail 2
B1BR2-24280-WM	1124lm	24W	2700K	Wireless
B1BR2-24380-NN	1124lm	24W	3000K	On/off
B1BR2-24380-DN	1124lm	24W	3000K	Dail 2
B1BR2-24380-WM	1124lm	24W	3000K	Wireless
B1BR2-24580-NN	1124lm	24W	4000K	On/off
B1BR2-24580-DN	1124lm	24W	4000K	Dail 2
B1BR2-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 °emission

Part No.	LM	Power	CCT	Dimming
B1BR5-24280-NN	450lm	24W	2700K	On/off
B1BR5-24280-DN	450lm	24W	2700K	Dail 2
B1BR5-24280-WM	450lm	24W	2700K	Wireless
B1BR5-24380-NN	450lm	24W	3000K	On/off
B1BR5-24380-DN	450lm	24W	3000K	Dail 2
B1BR5-24380-WM	450lm	24W	3000K	Wireless
B1BR5-24580-NN	450lm	24W	4000K	On/off
B1BR5-24580-DN	450lm	24W	4000K	Dail 2
B1BR5-24580-WM	450lm	24W	4000K	Wireless

### SIZE



### LIGHT DISTRIBUTION

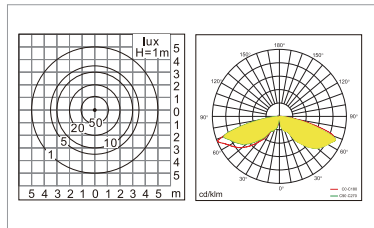

## BOLE-R1

### PRODUCT MODEL


Optics with 360 °emission

Part No.	LM	Power	CCT	Dimming
B1BR1-24280-NN	1124lm	24W	2700K	On/off
B1BR1-24280-DN	1124lm	24W	2700K	Dail 2
B1BR1-24280-WM	1124lm	24W	2700K	Wireless
B1BR1-24380-NN	1124lm	24W	3000K	On/off
B1BR1-24380-DN	1124lm	24W	3000K	Dail 2
B1BR1-24380-WM	1124lm	24W	3000K	Wireless
B1BR1-24580-NN	1124lm	24W	4000K	On/off
B1BR1-24580-DN	1124lm	24W	4000K	Dail 2
B1BR1-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 °emission

Part No.	LM	Power	CCT	Dimming
B1BR4-24280-NN	450lm	24W	2700K	On/off
B1BR4-24280-DN	450lm	24W	2700K	Dail 2
B1BR4-24280-WM	450lm	24W	2700K	Wireless
B1BR4-24380-NN	450lm	24W	3000K	On/off
B1BR4-24380-DN	450lm	24W	3000K	Dail 2
B1BR4-24380-WM	450lm	24W	3000K	Wireless
B1BR4-24580-NN	450lm	24W	4000K	On/off
B1BR4-24580-DN	450lm	24W	4000K	Dail 2
B1BR4-24580-WM	450lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

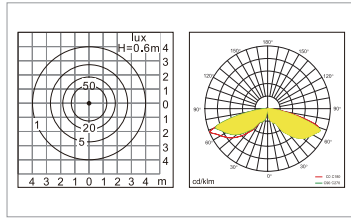

**BOLE-R0**

**PRODUCT MODEL**


Optics with 360 °emission

Part No.	LM	Power	CCT	Dimming
B1BR0-12280-NN	498lm	24W	2700K	On/off
B1BR0-12280-DN	498lm	24W	2700K	Dial 2
B1BR0-12280-WM	498lm	24W	2700K	Wireless
B1BR0-12380-NN	498lm	24W	3000K	On/off
B1BR0-12380-DN	498lm	24W	3000K	Dial 2
B1BR0-12380-WM	498lm	24W	3000K	Wireless
B1BR0-12580-NN	498lm	24W	4000K	On/off
B1BR0-12580-DN	498lm	24W	4000K	Dial 2
B1BR0-12580-WM	498lm	24W	4000K	Wireless
B1BR0-24280-NN	1124lm	24W	2700K	On/off
B1BR0-24280-DN	1124lm	24W	2700K	Dial 2
B1BR0-24280-WM	1124lm	24W	2700K	Wireless
B1BR0-24380-NN	1124lm	24W	3000K	On/off
B1BR0-24380-DN	1124lm	24W	3000K	Dial 2
B1BR0-24380-WM	1124lm	24W	3000K	Wireless
B1BR0-24580-NN	1124lm	24W	4000K	On/off
B1BR0-24580-DN	1124lm	24W	4000K	Dial 2
B1BR0-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 °emission

Part No.	LM	Power	CCT	Dimming
B1BR3-12280-NN	470lm	12W	2700K	On/off
B1BR3-12280-DN	470lm	12W	2700K	Dial 2
B1BR3-12280-WM	470lm	12W	2700K	Wireless
B1BR3-12380-NN	470lm	12W	3000K	On/off
B1BR3-12380-DN	470lm	12W	3000K	Dial 2
B1BR3-12380-WM	470lm	12W	3000K	Wireless
B1BR3-12580-NN	470lm	12W	4000K	On/off
B1BR3-12580-DN	470lm	12W	4000K	Dial 2
B1BR3-12580-WM	470lm	12W	4000K	Wireless
B1BR3-24280-NN	450lm	24W	2700K	On/off
B1BR3-24280-DN	450lm	24W	2700K	Dial 2
B1BR3-24280-WM	450lm	24W	2700K	Wireless
B1BR3-24380-NN	450lm	24W	3000K	On/off
B1BR3-24380-DN	450lm	24W	3000K	Dial 2
B1BR3-24380-WM	450lm	24W	3000K	Wireless
B1BR3-24580-NN	450lm	24W	4000K	On/off
B1BR3-24580-DN	450lm	24W	4000K	Dial 2
B1BR3-24580-WM	450lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

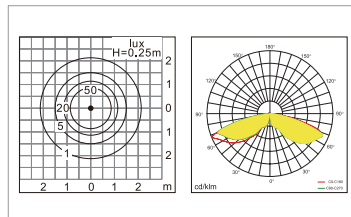



# BOLE-S

## APPLICATIONS:

Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- No glare/Light emission 360°
- No glare, long range, uniform light





## BOLE-S2

### PRODUCT MODEL

Optics with 360 °emission

Part No.	LM	Power	CCT	Dimming
B1BS2-24280-NN	1162lm	24W	2700K	On/off
B1BS2-24280-DN	1162lm	24W	2700K	Dail 2
B1BS2-24280-WM	1162lm	24W	2700K	Wireless
B1BS2-24380-NN	1162lm	24W	3000K	On/off
B1BS2-24380-DN	1162lm	24W	3000K	Dail 2
B1BS2-24380-WM	1162lm	24W	3000K	Wireless
B1BS2-24580-NN	1162lm	24W	4000K	On/off
B1BS2-24580-DN	1162lm	24W	4000K	Dail 2
B1BS2-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 °emission

Part No.	LM	Power	CCT	Dimming
B1BS5-24280-NN	620lm	24W	2700K	On/off
B1BS5-24280-DN	620lm	24W	2700K	Dail 2
B1BS5-24280-WM	620lm	24W	2700K	Wireless
B1BS5-24380-NN	620lm	24W	3000K	On/off
B1BS5-24380-DN	620lm	24W	3000K	Dail 2
B1BS5-24380-WM	620lm	24W	3000K	Wireless
B1BS5-24580-NN	620lm	24W	4000K	On/off
B1BS5-24580-DN	620lm	24W	4000K	Dail 2
B1BS5-24580-WM	620lm	24W	4000K	Wireless


Optics with 180 °emission

Part No.	LM	Power	CCT	Dimming
B1BS8-24280-NN	460lm	24W	2700K	On/off
B1BS8-24280-DN	460lm	24W	2700K	Dail 2
B1BS8-24280-WM	460lm	24W	2700K	Wireless
B1BS8-24380-NN	460lm	24W	3000K	On/off
B1BS8-24380-DN	460lm	24W	3000K	Dail 2
B1BS8-24380-WM	460lm	24W	3000K	Wireless
B1BS8-24580-NN	460lm	24W	4000K	On/off
B1BS8-24580-DN	460lm	24W	4000K	Dail 2
B1BS8-24580-WM	460lm	24W	4000K	Wireless

### SIZE



### LIGHT DISTRIBUTION

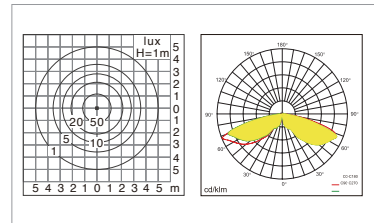

## BOLE-S1

### PRODUCT MODEL

Optics with 360 °emission

Part No.	LM	Power	CCT	Dimming
B1BS1-24280-NN	1162lm	24W	2700K	On/off
B1BS1-24280-DN	1162lm	24W	2700K	Dail 2
B1BS1-24280-WM	1162lm	24W	2700K	Wireless
B1BS1-24380-NN	1162lm	24W	3000K	On/off
B1BS1-24380-DN	1162lm	24W	3000K	Dail 2
B1BS1-24380-WM	1162lm	24W	3000K	Wireless
B1BS1-24580-NN	1162lm	24W	4000K	On/off
B1BS1-24580-DN	1162lm	24W	4000K	Dail 2
B1BS1-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 °emission

Part No.	LM	Power	CCT	Dimming
B1BS4-24280-NN	620lm	24W	2700K	On/off
B1BS4-24280-DN	620lm	24W	2700K	Dail 2
B1BS4-24280-WM	620lm	24W	2700K	Wireless
B1BS4-24380-NN	620lm	24W	3000K	On/off
B1BS4-24380-DN	620lm	24W	3000K	Dail 2
B1BS4-24380-WM	620lm	24W	3000K	Wireless
B1BS4-24580-NN	620lm	24W	4000K	On/off
B1BS4-24580-DN	620lm	24W	4000K	Dail 2
B1BS4-24580-WM	620lm	24W	4000K	Wireless


Optics with 180 °emission

Part No.	LM	Power	CCT	Dimming
B1BS7-24280-NN	460lm	24W	2700K	On/off
B1BS7-24280-DN	460lm	24W	2700K	Dail 2
B1BS7-24280-WM	460lm	24W	2700K	Wireless
B1BS7-24380-NN	460lm	24W	3000K	On/off
B1BS7-24380-DN	460lm	24W	3000K	Dail 2
B1BS7-24380-WM	460lm	24W	3000K	Wireless
B1BS7-24580-NN	460lm	24W	4000K	On/off
B1BS7-24580-DN	460lm	24W	4000K	Dail 2
B1BS7-24580-WM	460lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

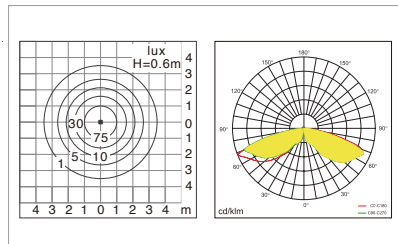

BOLE-S0

PRODUCT MODEL

Optics with 360 °emission

Part No.	LM	Power	CCT	Dimming
B1BS0-12280-NN	505lm	12W	2700K	On/off
B1BS0-12280-DN	505lm	12W	2700K	Dail 2
B1BS0-12280-WM	505lm	12W	2700K	Wireless
B1BS0-12380-NN	505lm	12W	3000K	On/off
B1BS0-12380-DN	505lm	12W	3000K	Dail 2
B1BS0-12380-WM	505lm	12W	3000K	Wireless
B1BS0-12580-NN	505lm	12W	4000K	On/off
B1BS0-12580-DN	505lm	12W	4000K	Dail 2
B1BS0-12580-WM	505lm	12W	4000K	Wireless
B1BS0-24280-NN	1162lm	24W	2700K	On/off
B1BS0-24280-DN	1162lm	24W	2700K	Dail 2
B1BS0-24280-WM	1162lm	24W	2700K	Wireless
B1BS0-24380-NN	1162lm	24W	3000K	On/off
B1BS0-24380-DN	1162lm	24W	3000K	Dail 2
B1BS0-24380-WM	1162lm	24W	3000K	Wireless
B1BS0-24580-NN	1162lm	24W	4000K	On/off
B1BS0-24580-DN	1162lm	24W	4000K	Dail 2
B1BS0-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 °emission

Part No.	LM	Power	CCT	Dimming
B1BS3-12280-NN	505lm	12W	2700K	On/off
B1BS3-12280-DN	505lm	12W	2700K	Dail 2
B1BS3-12280-WM	505lm	12W	2700K	Wireless
B1BS3-12380-NN	505lm	12W	3000K	On/off
B1BS3-12380-DN	505lm	12W	3000K	Dail 2
B1BS3-12380-WM	505lm	12W	3000K	Wireless
B1BS3-12580-NN	505lm	12W	4000K	On/off
B1BS3-12580-DN	505lm	12W	4000K	Dail 2
B1BS3-12580-WM	505lm	12W	4000K	Wireless
B1BS3-24280-NN	1162lm	24W	2700K	On/off
B1BS3-24280-DN	1162lm	24W	2700K	Dail 2
B1BS3-24280-WM	1162lm	24W	2700K	Wireless
B1BS3-24380-NN	1162lm	24W	3000K	On/off
B1BS3-24380-DN	1162lm	24W	3000K	Dail 2
B1BS3-24380-WM	1162lm	24W	3000K	Wireless
B1BS3-24580-NN	1162lm	24W	4000K	On/off
B1BS3-24580-DN	1162lm	24W	4000K	Dail 2
B1BS3-24580-WM	1162lm	24W	4000K	Wireless


Optics with 180 °emission

Part No.	LM	Power	CCT	Dimming
B1BS6-12280-NN	450lm	12W	2700K	On/off
B1BS6-12280-DN	450lm	12W	2700K	Dail 2
B1BS6-12280-WM	450lm	12W	2700K	Wireless
B1BS6-12380-NN	450lm	12W	3000K	On/off
B1BS6-12380-DN	450lm	12W	3000K	Dail 2
B1BS6-12380-WM	450lm	12W	3000K	Wireless
B1BS6-12580-NN	450lm	12W	4000K	On/off
B1BS6-12580-DN	450lm	12W	4000K	Dail 2
B1BS6-12580-WM	450lm	12W	4000K	Wireless
B1BS6-24280-NN	470lm	24W	2700K	On/off
B1BS6-24280-DN	470lm	24W	2700K	Dail 2
B1BS6-24280-WM	470lm	24W	2700K	Wireless
B1BS6-24380-NN	470lm	24W	3000K	On/off
B1BS6-24380-DN	470lm	24W	3000K	Dail 2
B1BS6-24380-WM	470lm	24W	3000K	Wireless
B1BS6-24580-NN	470lm	24W	4000K	On/off
B1BS6-24580-DN	470lm	24W	4000K	Dail 2
B1BS6-24580-WM	470lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

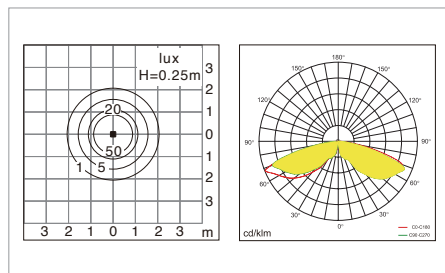


# BOLE-U

## APPLICATIONS:

Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- No glare/Light emission 360°
- No glare, long range, uniform light

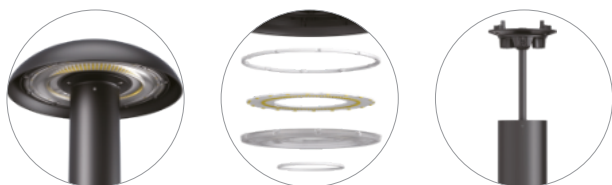




## BOLE-U2


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU2-24280-NN	2087lm	24W	2700K	On/off
B1BU2-24380-NN	2087lm	24W	3000K	On/off
B1BU2-24580-NN	2087lm	24W	4000K	On/off

### SIZE



### LIGHT DISTRIBUTION

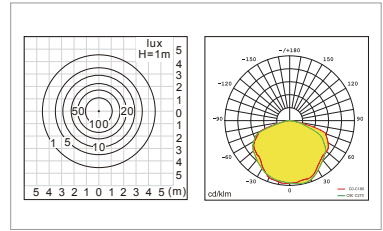


## BOLE-U1


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU1-24280-NN	2087lm	24W	2700K	On/off
B1BU1-24380-NN	2087lm	24W	3000K	On/off
B1BU1-24580-NN	2087lm	24W	4000K	On/off

### SIZE



### LIGHT DISTRIBUTION

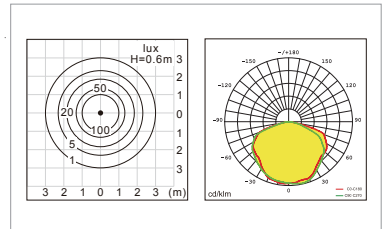


## BOLE-U0


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU0-10380-NN	907lm	10W	2700K	On/off
B1BU0-10380-NN	907lm	10W	3000K	On/off
B1BU0-10580-NN	907lm	10W	4000K	On/off
B1BU0-24380-NN	2087lm	24W	2700K	On/off
B1BU0-24380-NN	2087lm	24W	3000K	On/off
B1BU0-24580-NN	2087lm	24W	4000K	On/off

### SIZE



### LIGHT DISTRIBUTION

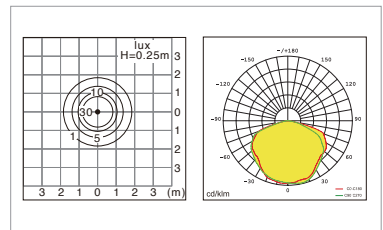

## 02


# FLOODLIGHTS

Cica is a series of high-quality floodlights, bionic design, rich textured design composed of die-casting aluminum parts, reflector, tempered glass, high-quality outdoor powder coating spraying process, Cica has tough weather resistance and protection grade is IP65.

Cica series uses one piece die-casting molding process, good heat dissipation performance. The luminaire has four sizes, providing three kinds of light angles to meet the lighting needs of different scenes. Deep anti-glare reflector design, clean light spot, with good anti-glare effect. Support a variety of optical accessories and Dali2 dimming.

Cica series are easy to install, angle adjustable from two directions which can precisely meet the lighting needs of lighting trees, architecture and sculpture.

Provide 5 years warranty.

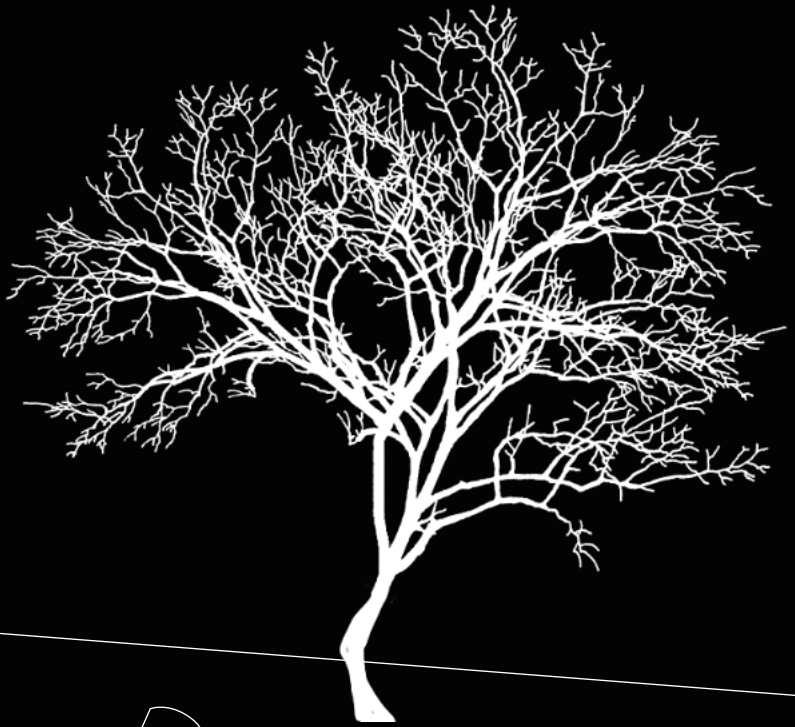

# CICA


## APPLICATIONS:

Trees, buildings and sculptures, etc.



- Bionic design
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming






## CICA-X



### PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CX0-40502-NN	2670lm	40W	2700K3000K/4000K	15°	On/off
B3CX0-40502-DN	2670lm	40W	2700K3000K/4000K	15°	DALI 2
B3CX0-40503-NN	2543lm	40W	2700K3000K/4000K	24°	On/off
B3CX0-40503-DN	2543lm	40W	2700K3000K/4000K	24°	DALI 2
B3CX0-40504-NN	2370lm	40W	2700K3000K/4000K	38°	On/off
B3CX0-40504-DN	2370lm	40W	2700K3000K/4000K	38°	DALI 2

### LIGHT DISTRIBUTION

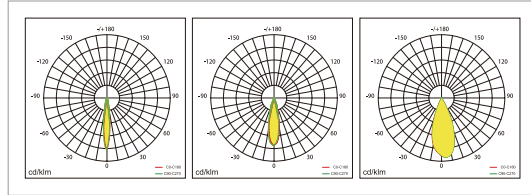

### SIZE




## CICA-M


### PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CM0-27502-NN	1730lm	27W	2700K3000K/4000K	15°	On/off
B3CM0-27502-DN	1730lm	27W	2700K3000K/4000K	15°	DALI 2
B3CM0-27503-NN	2050lm	27W	2700K3000K/4000K	24°	On/off
B3CM0-27503-DN	2050lm	27W	2700K3000K/4000K	24°	DALI 2
B3CM0-27504-NN	1810lm	27W	2700K3000K/4000K	38°	On/off
B3CM0-27504-DN	1810lm	27W	2700K3000K/4000K	38°	DALI 2

### LIGHT DISTRIBUTION

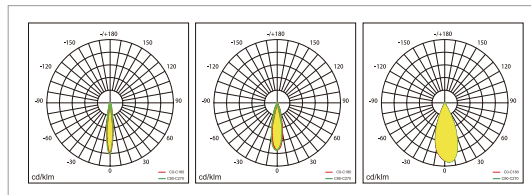

### SIZE



# CICA

## APPLICATIONS:

Trees, buildings and sculptures, etc.



- Cica series use one piece die-casting molding process, good heat dissipation performance.
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming






## CICA-S



### PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CS0-10502-NN	685lm	10W	2700K3000K/4000K	15°	On/off
B3CS0-10503-NN	595lm	10W	2700K3000K/4000K	24°	On/off
B3CS0-10504-NN	706lm	10W	2700K3000K/4000K	38°	On/off

### LIGHT DISTRIBUTION

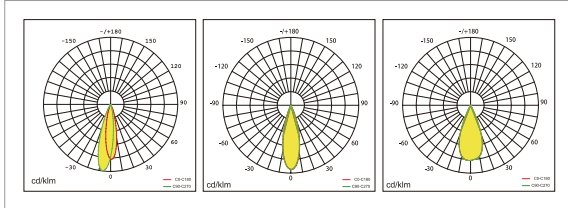

### SIZE




## CICA-T


### PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CT0-05503-NN	310lm	5W	2700K3000K/4000K	24°	On/off
B3CT0-05504-NN	315lm	5W	2700K3000K/4000K	36°	On/off

### LIGHT DISTRIBUTION

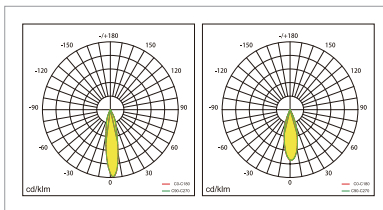

### SIZE




# 03

## WALL LUMINAIRES

Wall luminaires with simple design, composed of die-casting aluminum, reflective cup and tempered glass, with high-quality outdoor special powder spraying process which can make the lamp have a tough weather resistance and anti-aging functions, and the protection grade is IP65.

Wall luminaires adopt deep anti-glare reflective cup, with direct and indirect light, which can provide a variety of light emission angles to meet the needs of various scenes, it is with comfortable vision and without light spot. There are optional accessories, which makes the lamp have excellent anti-glare performance. The lamp housing is with integrally die-cast aluminum, and has good heat dissipation performance. Optional DALI2, wireless intelligent dimming and other functions are optional, it is with built-in waterproof terminals, which is convenient for installation and maintenance.

We provide 5 years warranty the lamp can be used as indoor and outdoor facade lighting, architectural decorative lighting, etc.

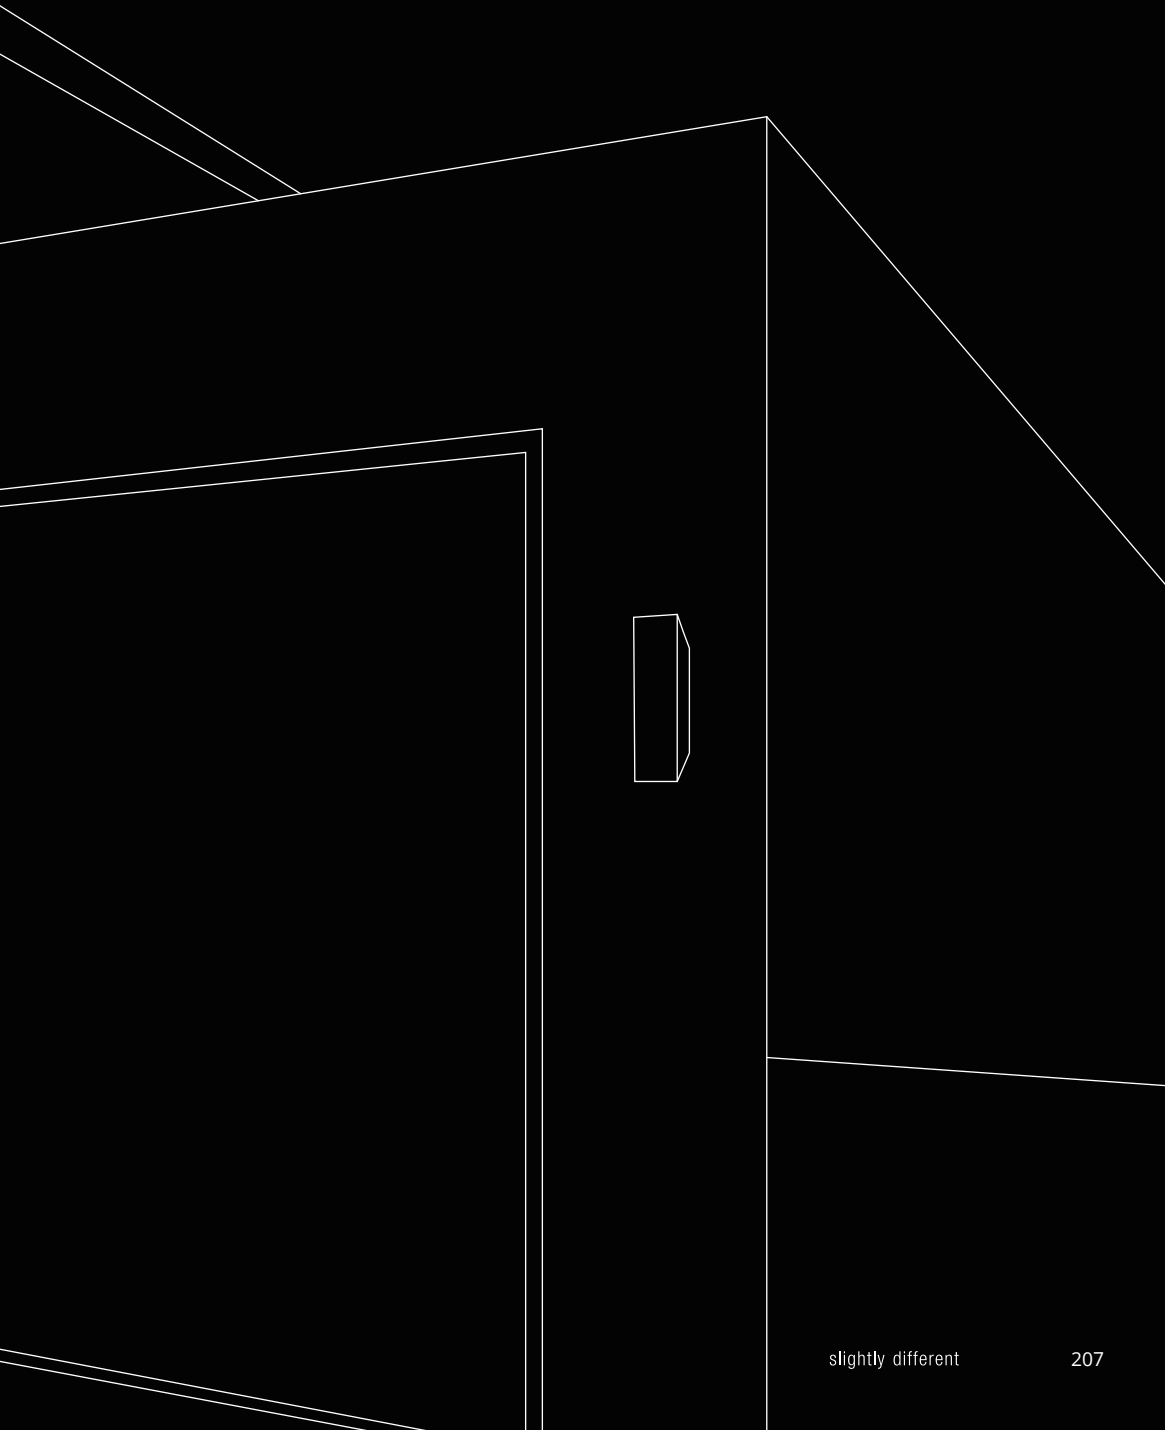

# LUNA

---

## APPLICATIONS:

Perfect for outdoor facade lighting and indoor architectural decorative lighting.



- Inside area of glass cover is sprayed white, soft light, no dark area
- Simple shape, easy to install
- High-quality processing of craftsmanship details






## LUNA

### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B4LA0-12280-NN	1100lm	12W	2700K	On/off
B4LA0-12380-NN	1100lm	12W	3000K	On/off
B4LA0-12580-NN	1100lm	12W	4000K	On/off
B4LA0-12280-DN	1100lm	12W	2700K	DALI
B4LA0-12380-DN	1100lm	12W	3000K	DALI
B4LA0-12580-DN	1100lm	12W	4000K	DALI
B4LA0-24280-NN	2200lm	24W	2700K	On/off
B4LA0-24380-NN	2200lm	24W	3000K	On/off
B4LA0-24580-NN	2200lm	24W	4000K	On/off
B4LA0-24280-DN	2200lm	24W	2700K	DALI
B4LA0-24380-DN	2200lm	24W	3000K	DALI
B4LA0-24580-DN	2200lm	24W	4000K	DALI

### SIZE




# CUBE

## APPLICATIONS:

Perfect for outdoor facade lighting and indoor architectural decorative lighting.



- Modular polarized lens design, various light distribution modes can be combined
- Single indirect/ direct light or both indirect and direct light optional
- Anti-glare design with large shielding angle
- IP65 protection, salt spray test more than 1400 hours






## CUBE


### PRODUCT MODEL

Part No.	LM	Power	CCT	Optic	Dimming
B4CU0-24366-NN	1920lm	24W	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-24366-DN	1920lm	24W	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12360-NN	960lm	12W	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12360-DN	960lm	12W	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12366-NN	960lm	12W	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12366-DN	960lm	12W	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-06360-NN	480lm	6W	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-06360-DN	480lm	6W	2700K/3000K/4000K	Asymmetric	DALI 2

### LIGHT DISTRIBUTION



### SIZE



# TIE-R

## APPLICATIONS:

Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.



- Optional DALI2, wireless intelligent dimming
- Direct and indirect light






## TIE-R


### PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TR0-24522-NN	2350lm	24W	2700K/3000K/4000K	118°/18°↑	On/off
B4TR0-24522-DN	2350lm	24W	2700K/3000K/4000K	118°/18°↑	DALI 2
B4TR0-24533-NN	2350lm	24W	2700K/3000K/4000K	124°/24°↑	On/off
B4TR0-24533-DN	2350lm	24W	2700K/3000K/4000K	124°/24°↑	DALI 2
B4TR0-24544-NN	2350lm	24W	2700K/3000K/4000K	136°/36°↑	On/off
B4TR0-24544-DN	2350lm	24W	2700K/3000K/4000K	136°/36°↑	DALI 2
B4TR0-43522-NN	3080lm	43W	2700K/3000K/4000K	118°/18°↑	On/off
B4TR0-43522-DN	3080lm	43W	2700K/3000K/4000K	118°/18°↑	DALI 2
B4TR0-43533-NN	3080lm	43W	2700K/3000K/4000K	124°/24°↑	On/off
B4TR0-43533-DN	3080lm	43W	2700K/3000K/4000K	124°/24°↑	DALI 2
B4TR0-43544-NN	3080lm	43W	2700K/3000K/4000K	136°/36°↑	On/off
B4TR0-43544-DN	3080lm	43W	2700K/3000K/4000K	136°/36°↑	DALI 2

### LIGHT DISTRIBUTION

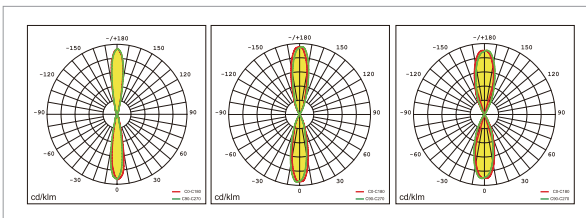

### SIZE



# TIE-S

## APPLICATIONS:

Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.

IP65


IK07

DALI

CE

RoHS

- Optional DALI2, wireless intelligent dimming
- Direct and indirect light






## TIE-S


### PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TS0-24522-NN	2382lm	24W	2700K/3000K/4000K	118°/18°↑	On/off
B4TS0-24522-DN	2382lm	24W	2700K/3000K/4000K	118°/18°↑	DALI 2
B4TS0-24533-NN	2382lm	24W	2700K/3000K/4000K	124°/24°↑	On/off
B4TS0-24533-DN	2382lm	24W	2700K/3000K/4000K	124°/24°↑	DALI 2
B4TS0-24544-NN	2382lm	24W	2700K/3000K/4000K	136°/36°↑	On/off
B4TS0-24544-DN	2382lm	24W	2700K/3000K/4000K	136°/36°↑	DALI 2
B4TS0-43522-NN	3120lm	43W	2700K/3000K/4000K	118°/18°↑	On/off
B4TS0-43522-DN	3120lm	43W	2700K/3000K/4000K	118°/18°↑	DALI 2
B4TS0-43533-NN	3120lm	43W	2700K/3000K/4000K	124°/24°↑	On/off
B4TS0-43533-DN	3120lm	43W	2700K/3000K/4000K	124°/24°↑	DALI 2
B4TS0-43544-NN	3120lm	43W	2700K/3000K/4000K	136°/36°↑	On/off
B4TS0-43544-DN	3120lm	43W	2700K/3000K/4000K	136°/36°↑	DALI 2

### LIGHT DISTRIBUTION

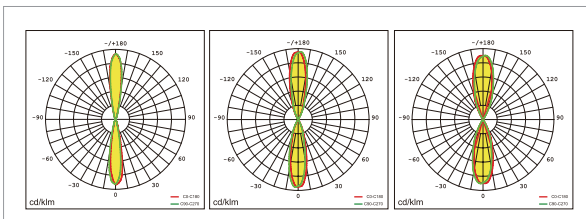

### SIZE




# NATURE-W

## APPLICATIONS:

It can be used for indoor and outdoor facade lighting, architectural decorative lighting, etc.



No Glare



Light Emission 360°






## NATURE-W


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B4NW0-10280-NN	963lm	10W	2700K	On/off
B4NW0-10380-NN	963lm	10W	3000K	On/off
B4NW0-10580-NN	963lm	10W	4000K	On/off

### SIZE



### LIGHT DISTRIBUTION



# 04


## CEILING LUMINAIRES


Halo is a round ceiling lamp with simple appearance and rich texture. The main body of the lamp is die-cast and has good heat dissipation performance. With high quality outdoor powder technology, the lamp has tough weather resistance. Lamp protection grade is IP65.

Halo series have two product sizes with three beam angles to meet lighting requirements in various scenes. The optical part of the lamp is an integrated ring reflective cup design, with anti-glare hood and high quality toughened glass, so that the lamp has a good anti-glare effect and comfortable visual perception. Dali2 dimming, wireless dimming, radar sensing and other intelligent control modes can be provided.

Halo lamp is easy to install, and the optional installation accessories can meet the installation requirements in different cable outlet. The lamps have 5 years warranty.

It can be used in indoor lighting, outdoor corridor lighting, entrance lighting and other application areas.

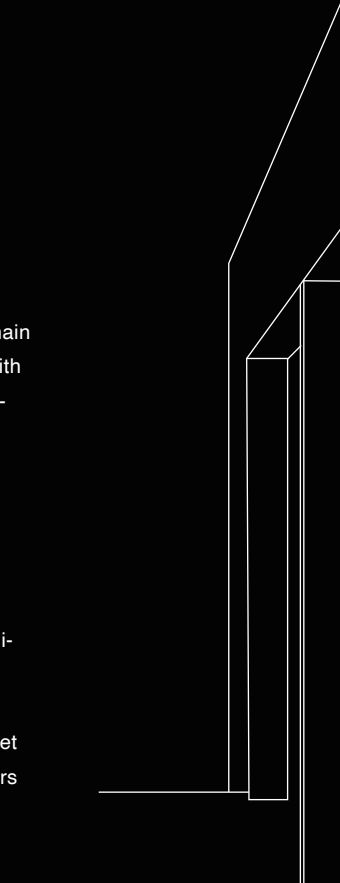

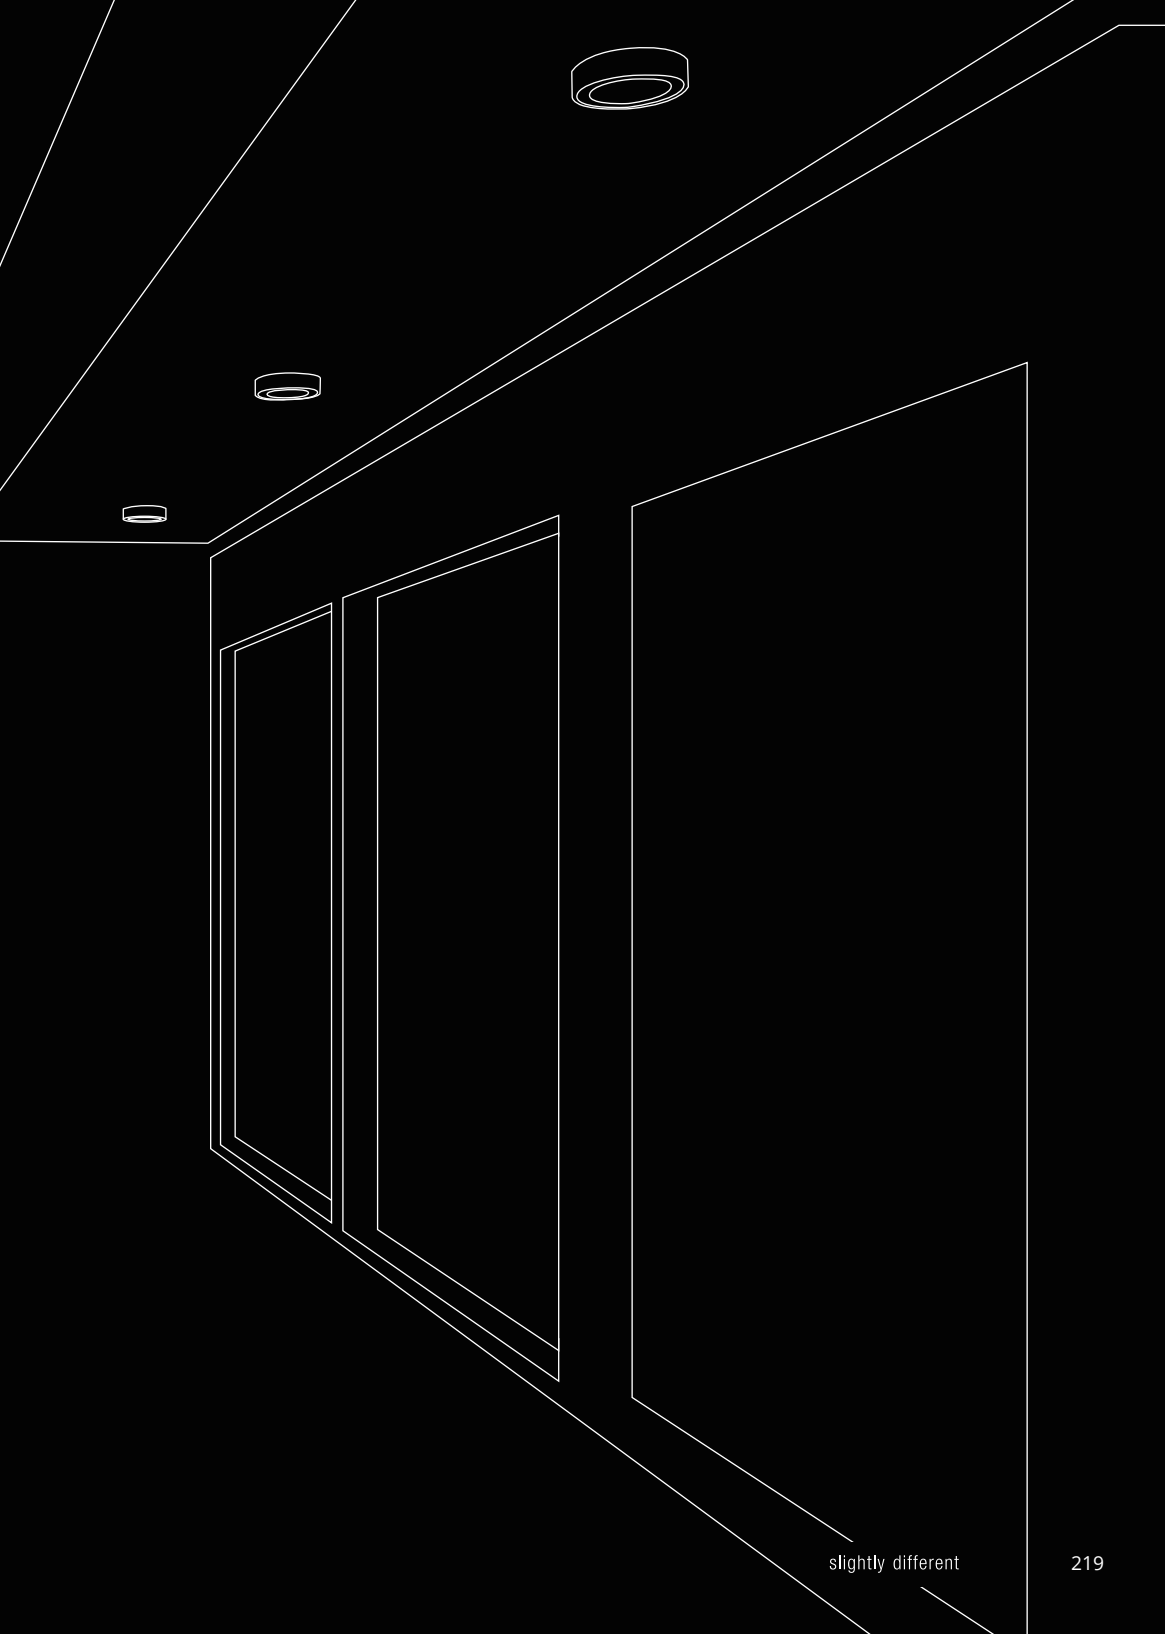


# HALO

## APPLICATIONS:

It can be used in indoor lighting, outdoor corridor lighting, entrance lighting



- The optical part is designed as a one-piece annular reflector
- Simple, easy and quick installation






## HALO-1



### PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA1-25520-NN	2135lm	25W	2700K/3000K/4000K	20°	On/off
B5HA1-25520-DN	2135lm	25W	2700K/3000K/4000K	20°	DALI 2
B5HA1-25520-WM	2135lm	25W	2700K/3000K/4000K	20°	Wireless
B5HA1-25540-NN	1987lm	25W	2700K/3000K/4000K	34°	On/off
B5HA1-25540-DN	1987lm	25W	2700K/3000K/4000K	34°	DALI 2
B5HA1-25540-WM	1987lm	25W	2700K/3000K/4000K	34°	Wireless
B5HA1-25550-NN	1746lm	25W	2700K/3000K/4000K	48°	On/off
B5HA1-25550-DN	1746lm	25W	2700K/3000K/4000K	48°	DALI 2
B5HA1-25550-WM	1746lm	25W	2700K/3000K/4000K	48°	Wireless
B5HA1-39520-NN	2600lm	39W	2700K/3000K/4000K	20°	On/off
B5HA1-39520-DN	2600lm	39W	2700K/3000K/4000K	20°	DALI 2
B5HA1-39520-WN	2600lm	39W	2700K/3000K/4000K	20°	Wireless
B5HA1-39540-NN	2328lm	39W	2700K/3000K/4000K	34°	On/off
B5HA1-39540-DN	2328lm	39W	2700K/3000K/4000K	34°	DALI 2
B5HA1-39540-WN	2328lm	39W	2700K/3000K/4000K	34°	Wireless
B5HA1-39550-NN	2000lm	39W	2700K/3000K/4000K	48°	On/off
B5HA1-39550-DN	2000lm	39W	2700K/3000K/4000K	48°	DALI 2
B5HA1-39550-WN	2000lm	39W	2700K/3000K/4000K	48°	Wireless

### SIZE



### LIGHT DISTRIBUTION

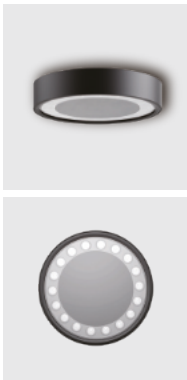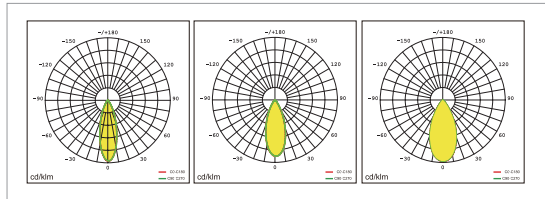


## HALO-0


### PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA0-13520-NN	1069lm	13W	2700K/3000K/4000K	20°	On/off
B5HA0-13540-NN	1105lm	13W	2700K/3000K/4000K	34°	On/off
B5HA0-13550-NN	1173lm	13W	2700K/3000K/4000K	48°	On/off

### LIGHT DISTRIBUTION

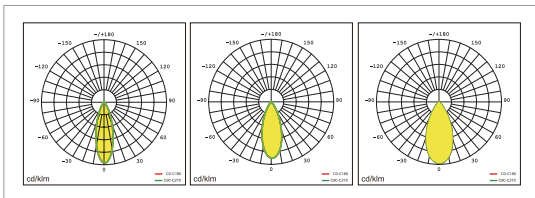

### SIZE




# 05


## WALL RECESSED LUMINAIRES

Safe series is a step lamp with special optical design, and with simple shape and rich texture. It is composed of die-casting aluminum parts, PC lenses and engineering plastic parts. The special surface treatment process for outdoor lamps makes the lamps have good weather resistance, the protection grade is IP65.

Safe step light series are available in square square and rectangular shapes. The unique optical design makes the light outlet of the lamp small. With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity. It supports 1-10V dimming and Dali2 dimming.

We offer 5 years warranty. It can be applicable for indoor and outdoor lighting purpose, wall path lighting, etc.

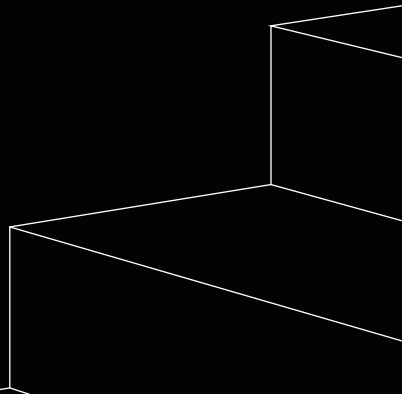

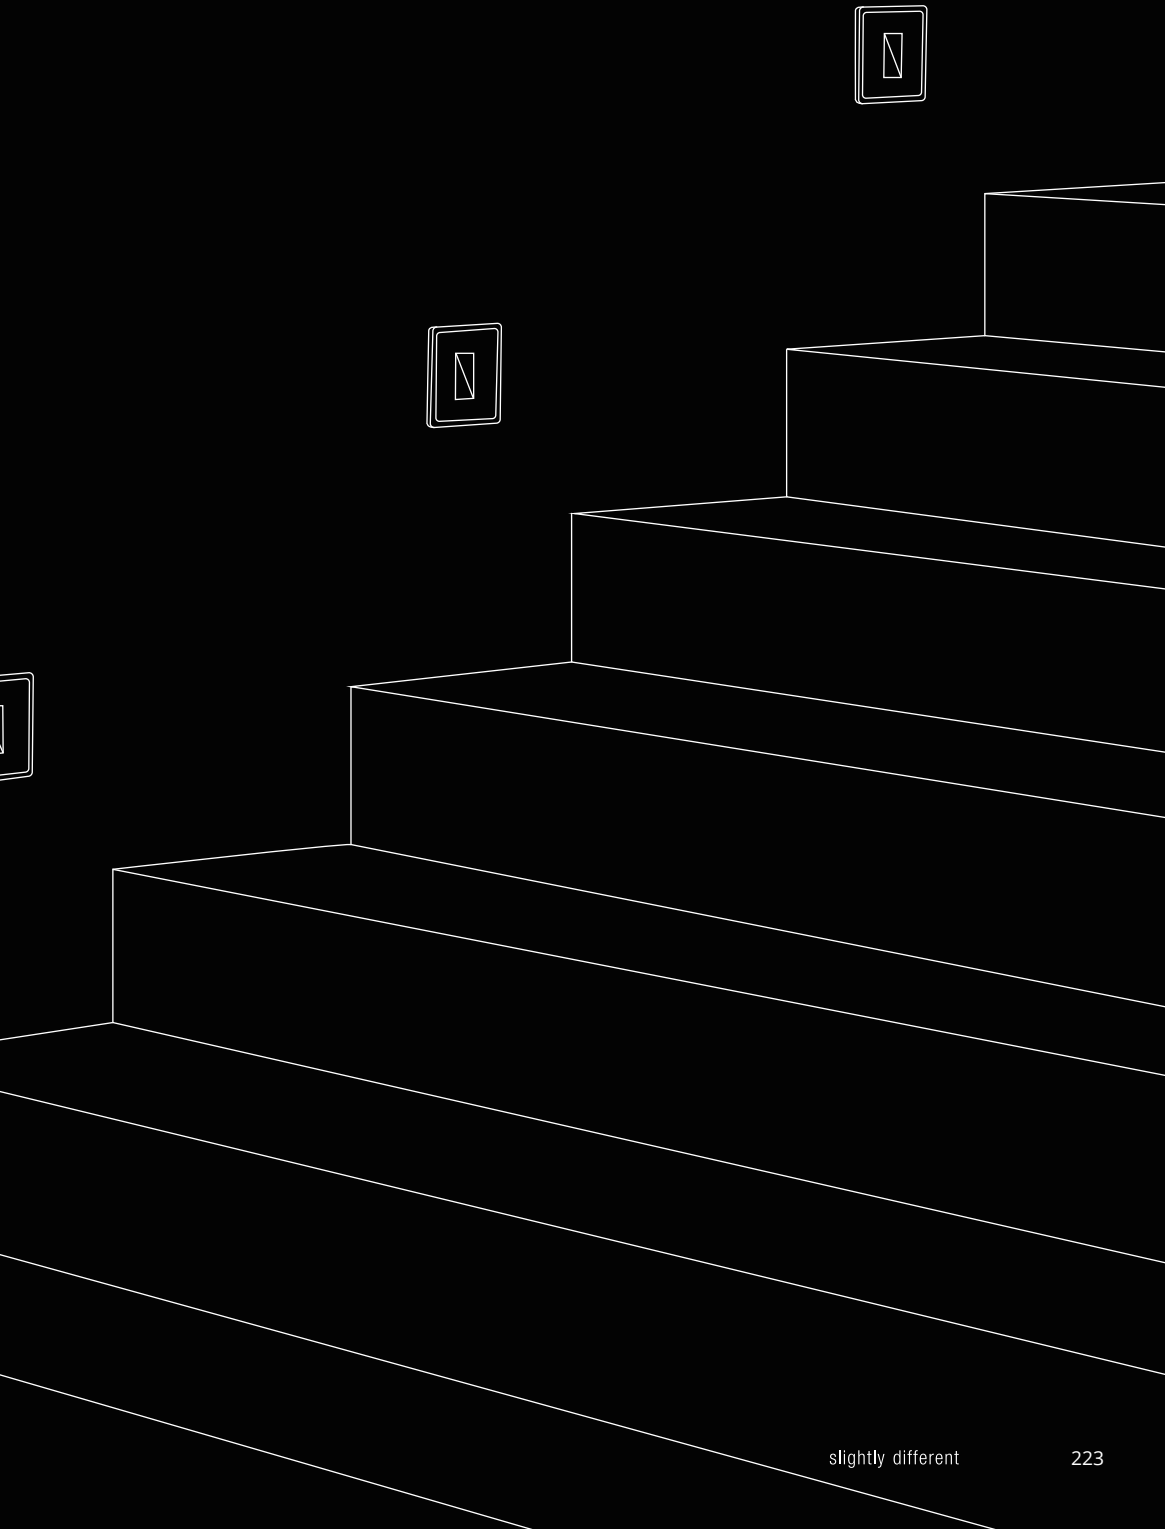


# SAFE-S


## APPLICATIONS:

It can be applicable for indoor and outdoor lighting purpose, wall path lighting, etc.



- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.






## SAFE-S


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SS0-04250-NN	296lm	4W	2700K	On/off
B2SS0-04350-NN	296lm	4W	3000K	On/off
B2SS0-04550-NN	296lm	4W	4000K	On/off
B2SS0-04250-VN	296lm	4W	2700K	1-10V
B2SS0-04350-VN	296lm	4W	3000K	1-10V
B2SS0-04550-VN	296lm	4W	4000K	1-10V
B2SS0-04250-DN	296lm	4W	2700K	DALI 2
B2SS0-04350-DN	296lm	4W	3000K	DALI 2
B2SS0-04550-DN	296lm	4W	4000K	DALI 2

### LIGHT DISTRIBUTION

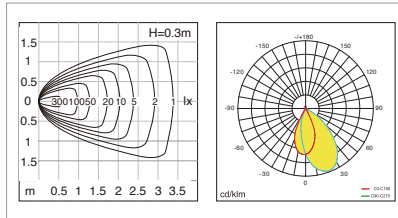

### SIZE



# SAFE-O

## APPLICATIONS:

It can be applicable for indoor and outdoor lighting purpose. wall path lighting, etc.



- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.
- Sufficient position of knock-out holes ensure different wiring directions






## SAFE-O


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SO0-07250-NN	360lm	7W	2700K	On/off
B2SO0-07350-NN	360lm	7W	3000K	On/off
B2SO0-07550-NN	360lm	7W	4000K	On/off
B2SO0-08250-VN	360lm	8W	2700K	1-10V
B2SO0-08350-VN	360lm	8W	3000K	1-10V
B2SO0-08550-VN	360lm	8W	4000K	1-10V
B2SO0-08250-DN	360lm	8W	2700K	DALI 2
B2SO0-08350-DN	360lm	8W	3000K	DALI 2
B2SO0-08550-DN	360lm	8W	4000K	DALI 2

### LIGHT DISTRIBUTION

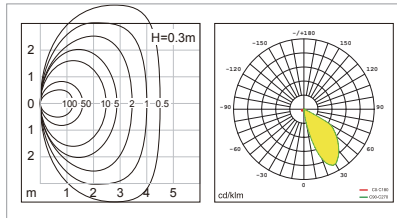

### SIZE




# 06


## TABLE LAMPS

NATURET is a portable and rechargeable desk lamp with a compact and exquisite design that can last for 8 hours ( $\pm 1$  hours) at full power.

It is controlled by the touch button on the top of the lamp to switch on and switch off the lamp and adjust its brightness.

NATURET's excellent optical design with a wide range of irradiation, IP65/IK08, meets various indoor and outdoor lighting needs

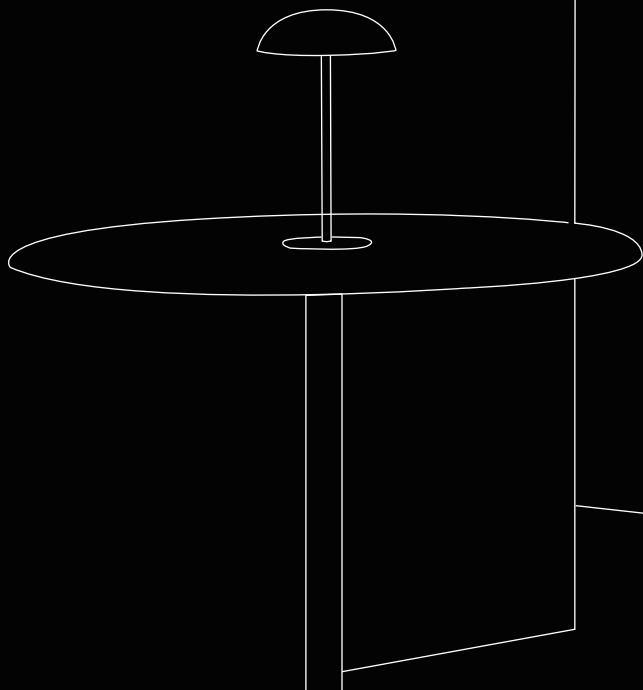

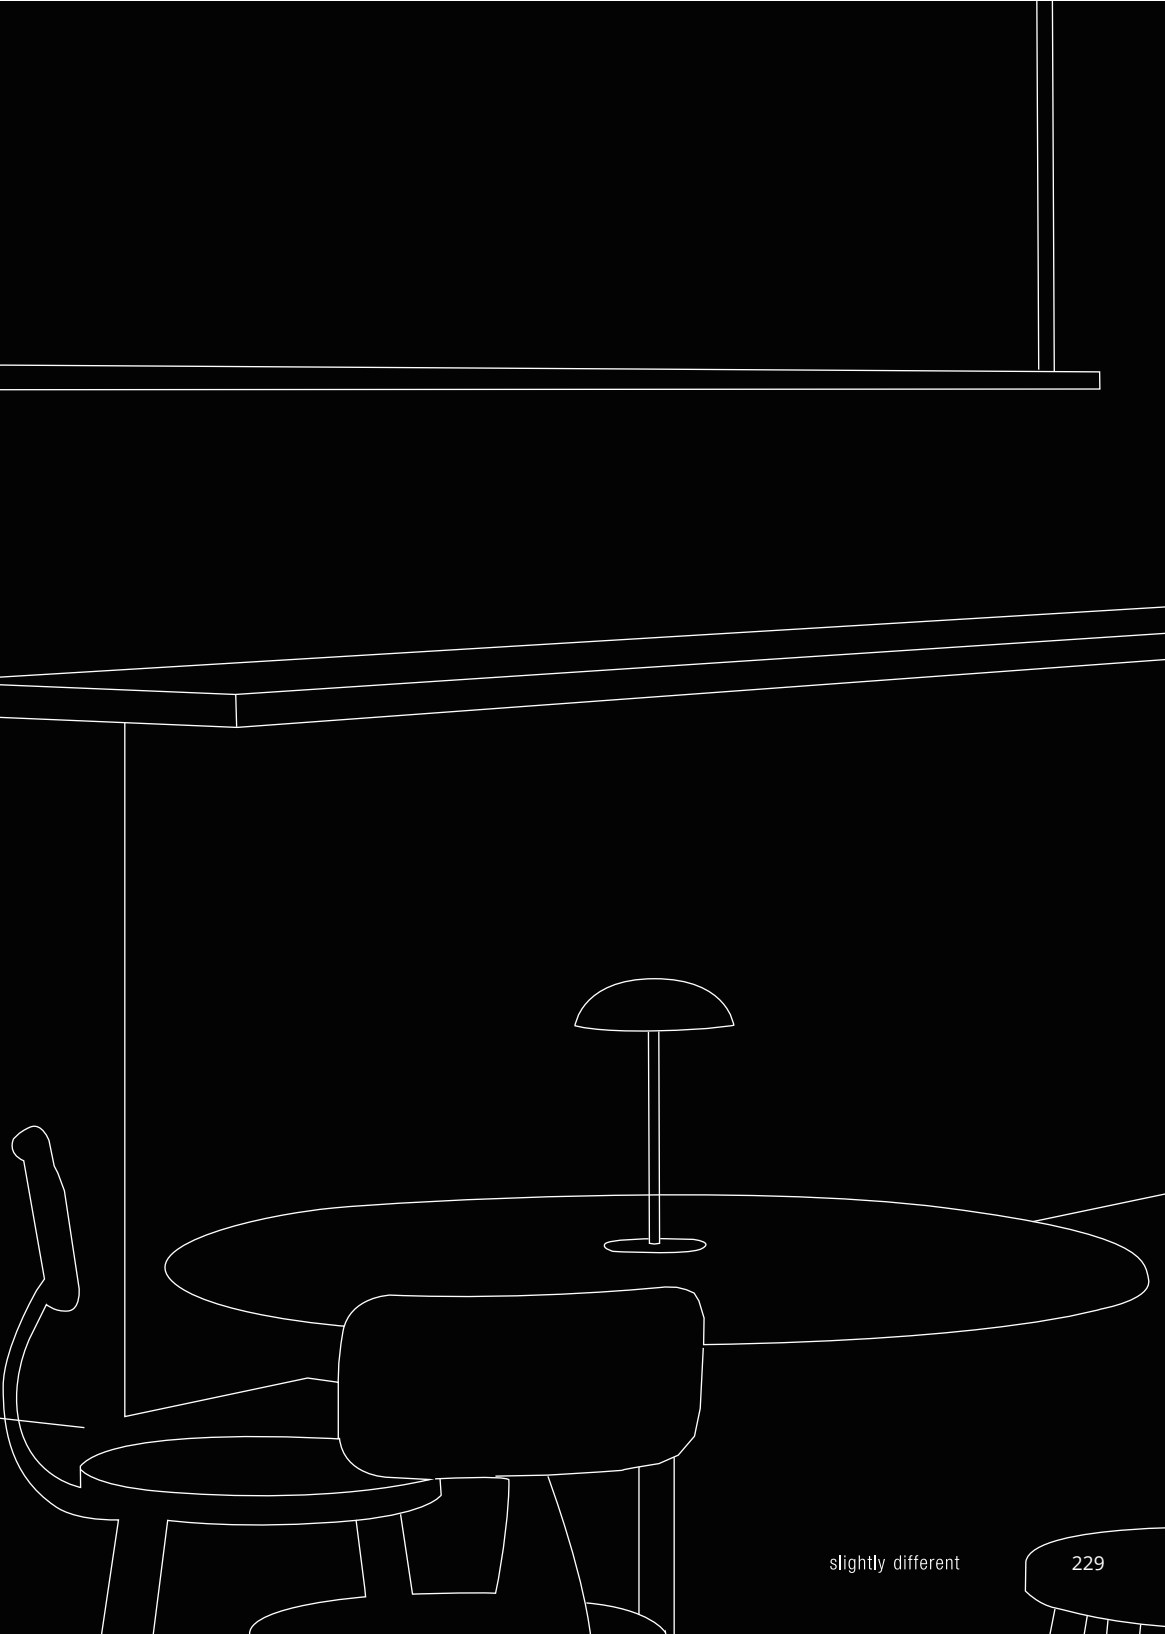

# PUDDING


## APPLICATIONS:

Meet various indoor and outdoor lighting needs

IP54

IK06

- Pudding design is derived from pudding, its shape is simple and compact;
- Adopt rechargeable battery solution, easy to use;
- Lamp head adopts magnetic solution, matched desktop brackets, floor-standing brackets and hanging brackets and other forms of usage
- Large angle lens for wide light distribution and good uniformity;
- The bracket is easy to store;






## PUDDING

### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9PU0-04280-TN	360lm	4W	2700K	Touch dimming
B9PU0-04380-TN	360lm	4W	3000K	Touch dimming
B9PU0-04580-TN	360lm	4W	4000K	Touch dimming

### SIZE



# NATURE-T

## APPLICATIONS:

Meet various indoor and outdoor lighting needs



- At full power can be used for 8 hours ( $\pm 1$  hours)
- 145° Wide beam angle, Provide wide light distribution
- charge with a Type C cable
- Lamp head is detachable






## NATURE-T


### PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9NT0-04280-TN	344lm	4W	2700K	Touch dimming
B9NT0-04380-TN	344lm	4W	3000K	Touch dimming
B9NT0-04580-TN	344lm	4W	4000K	Touch dimming


### SIZE





### LIGHT DISTRIBUTION







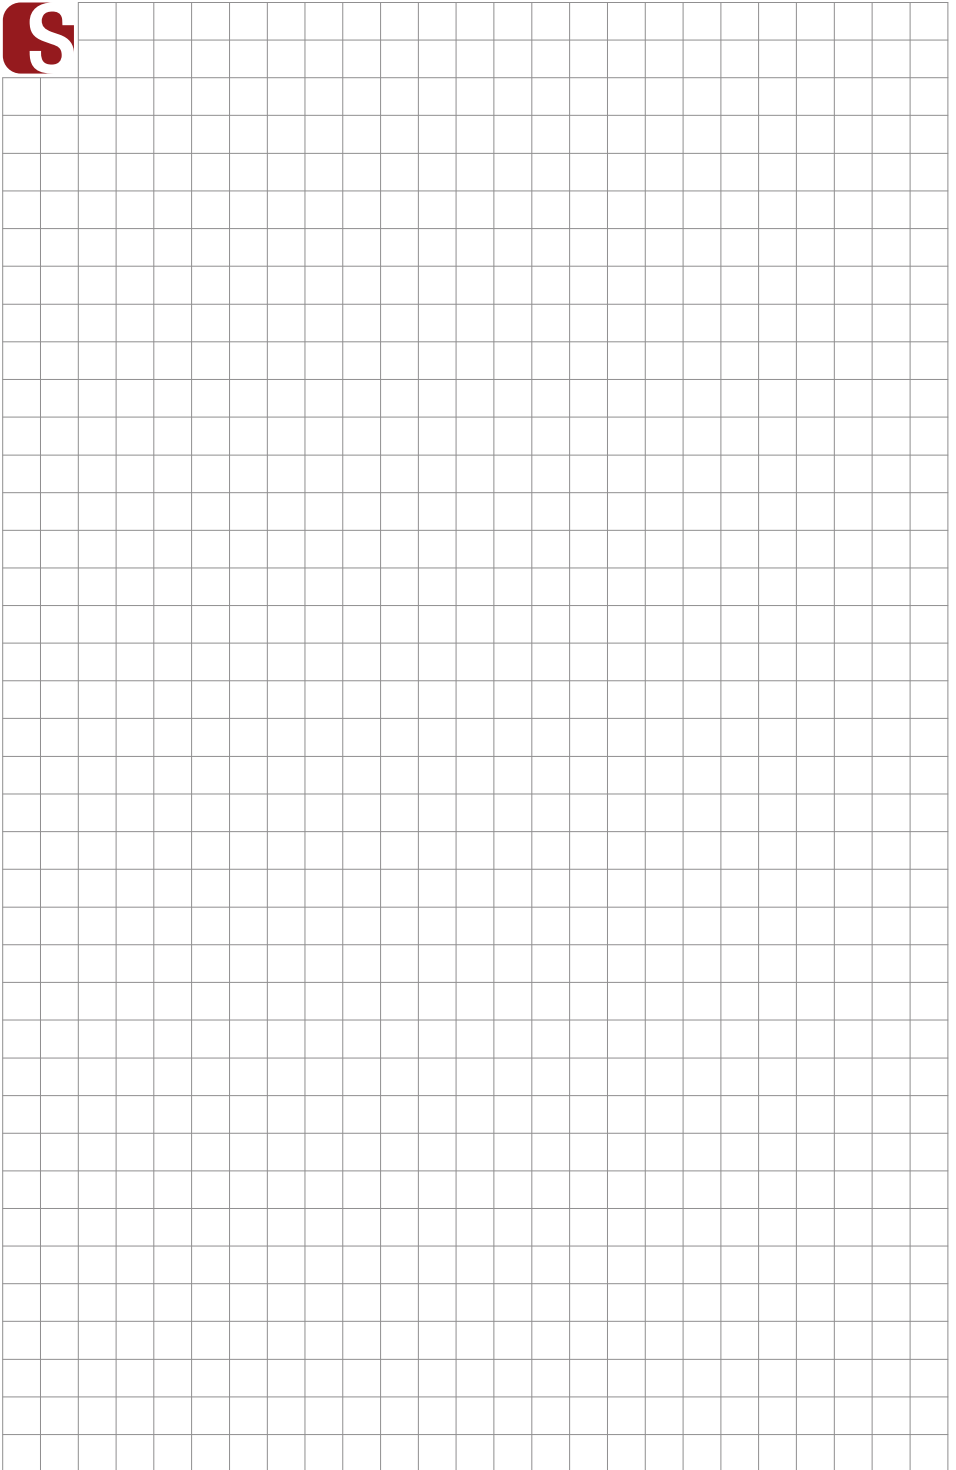


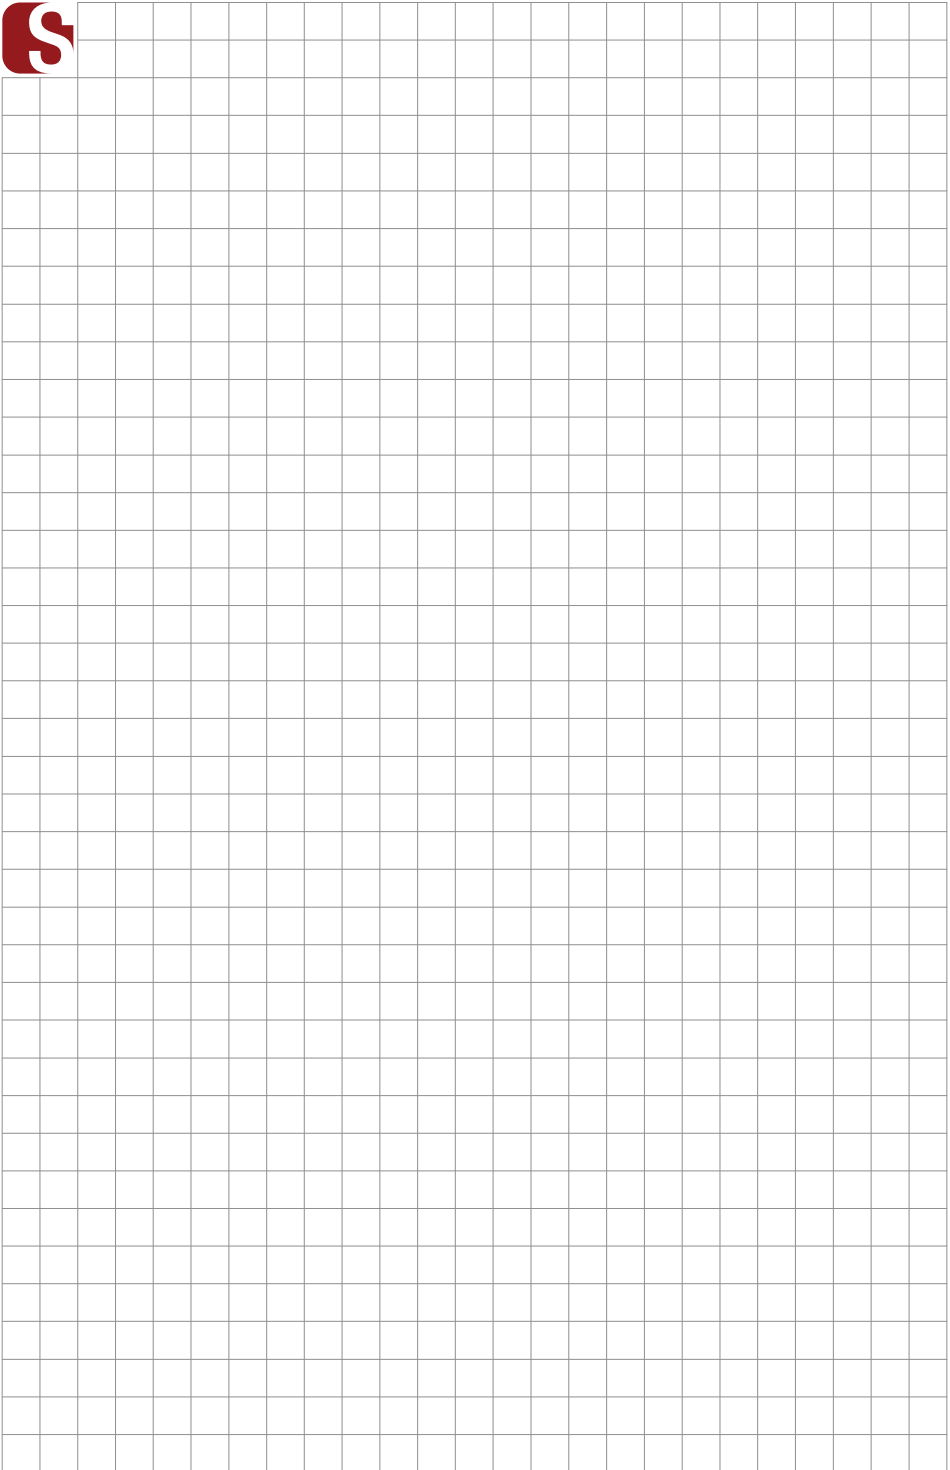


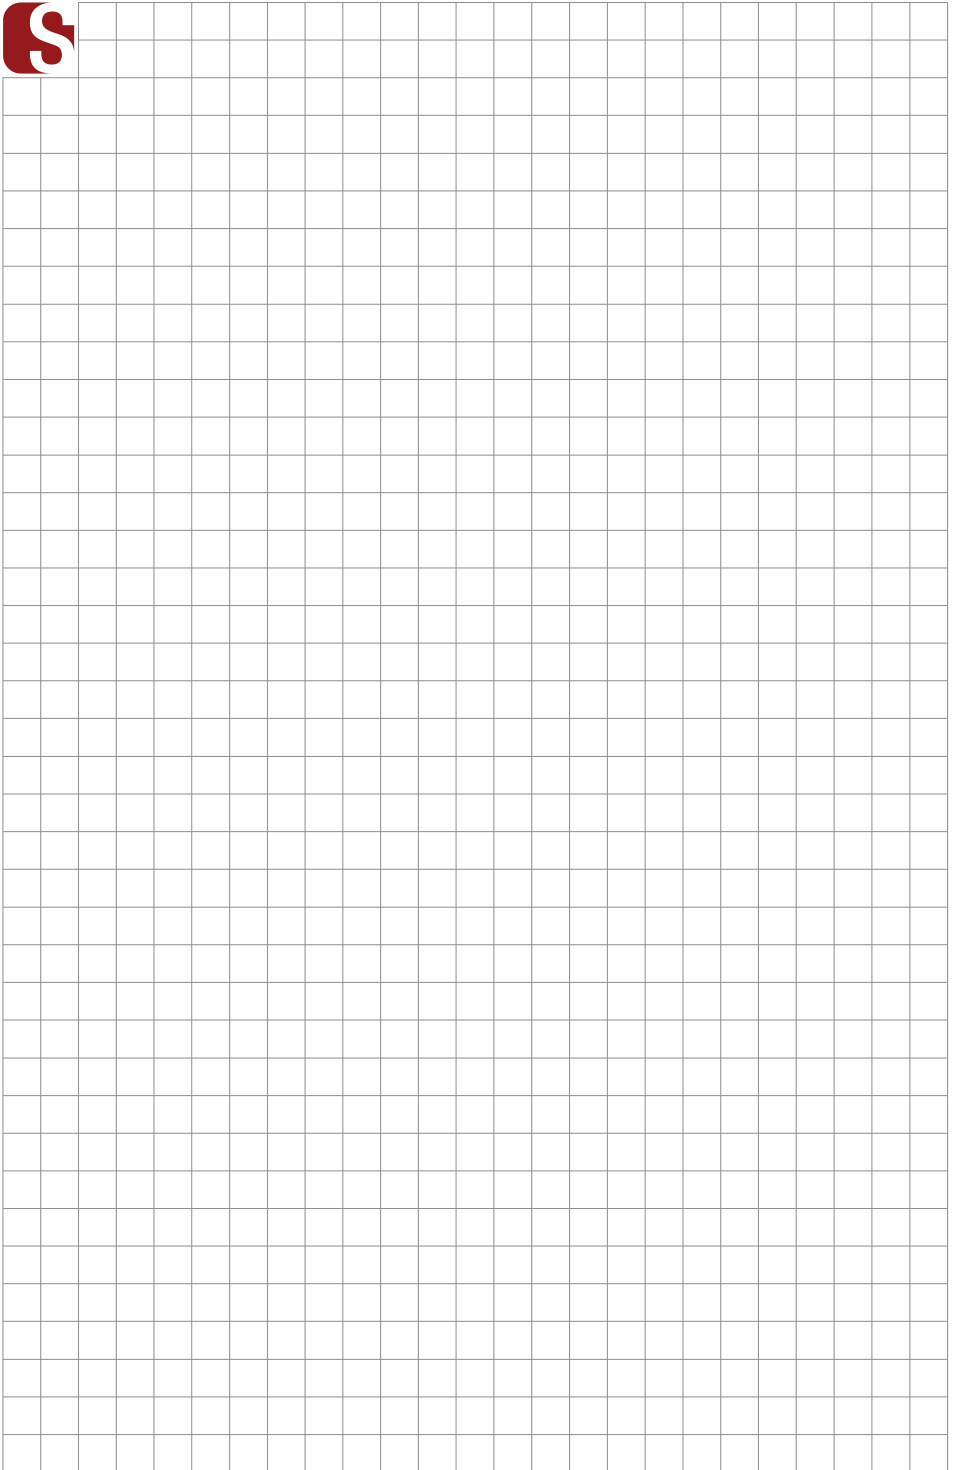


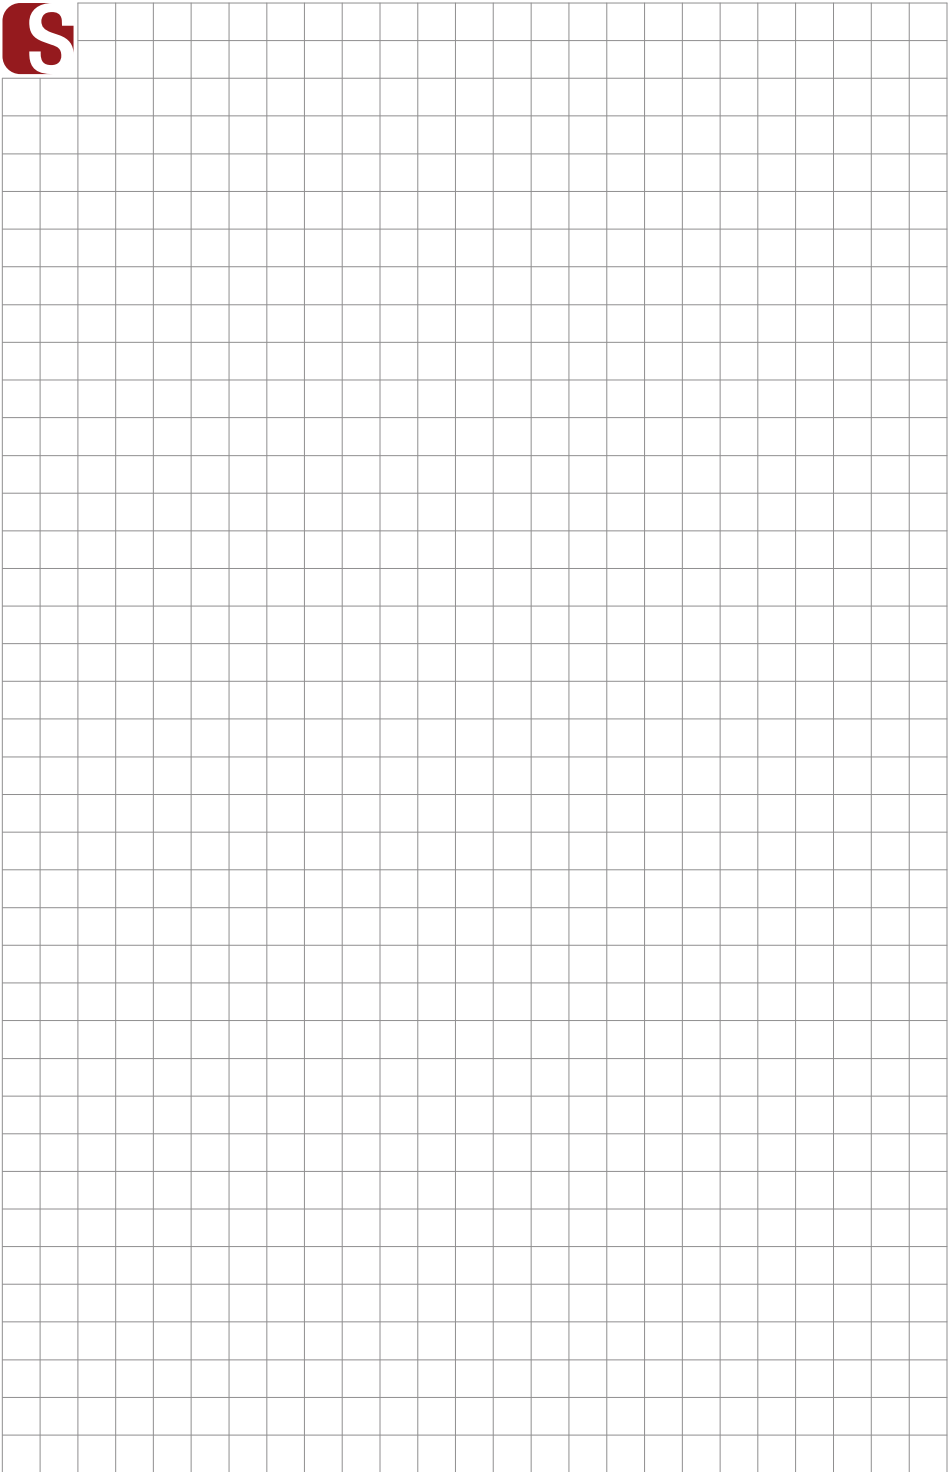

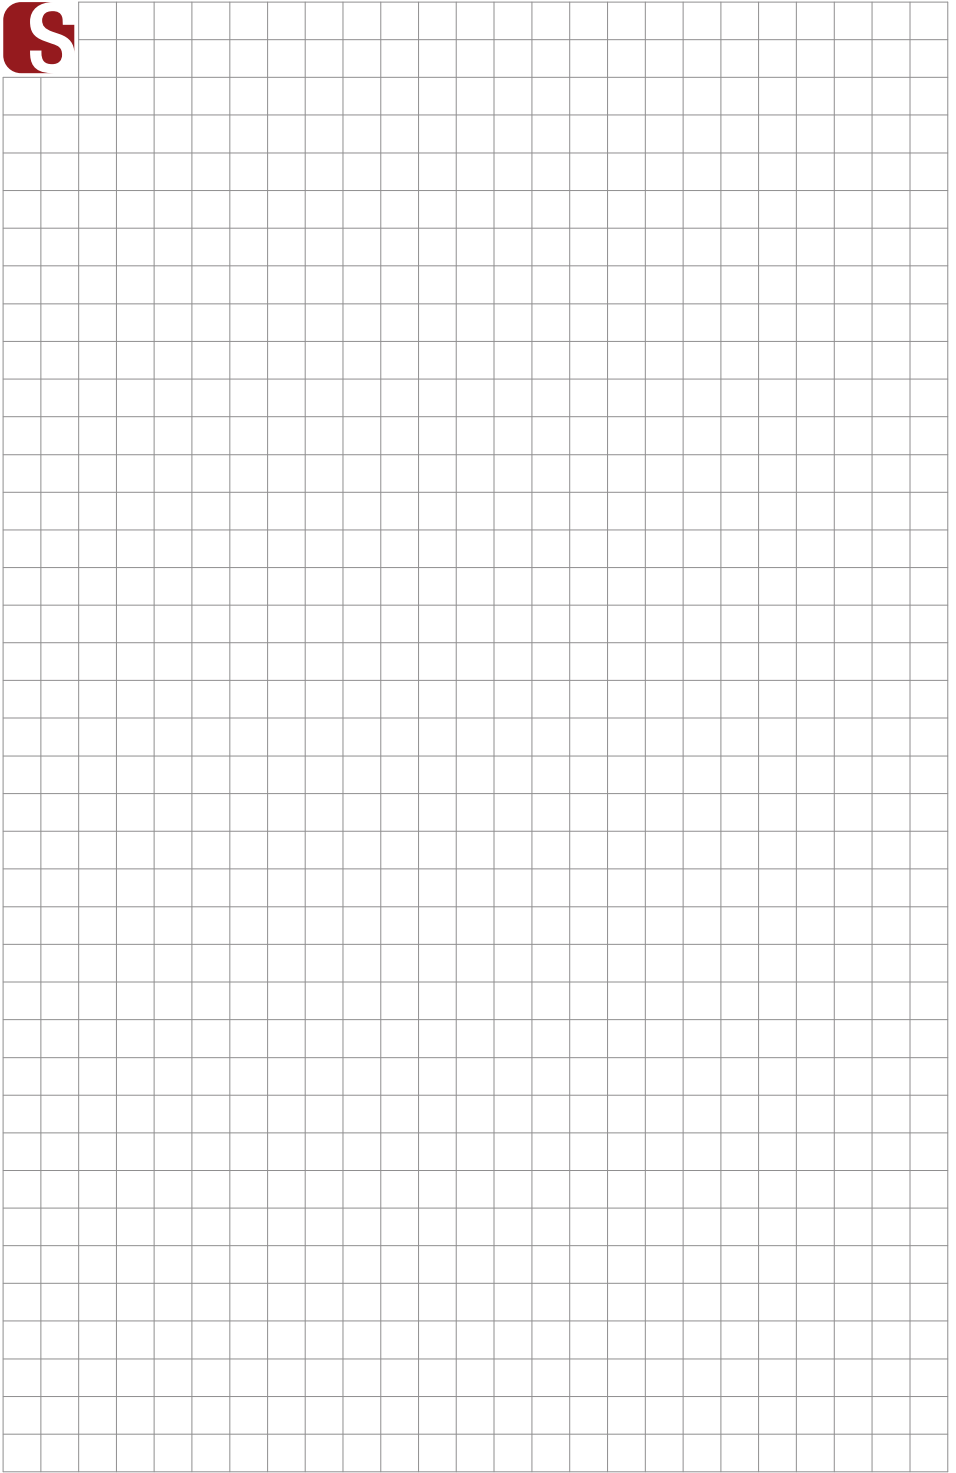

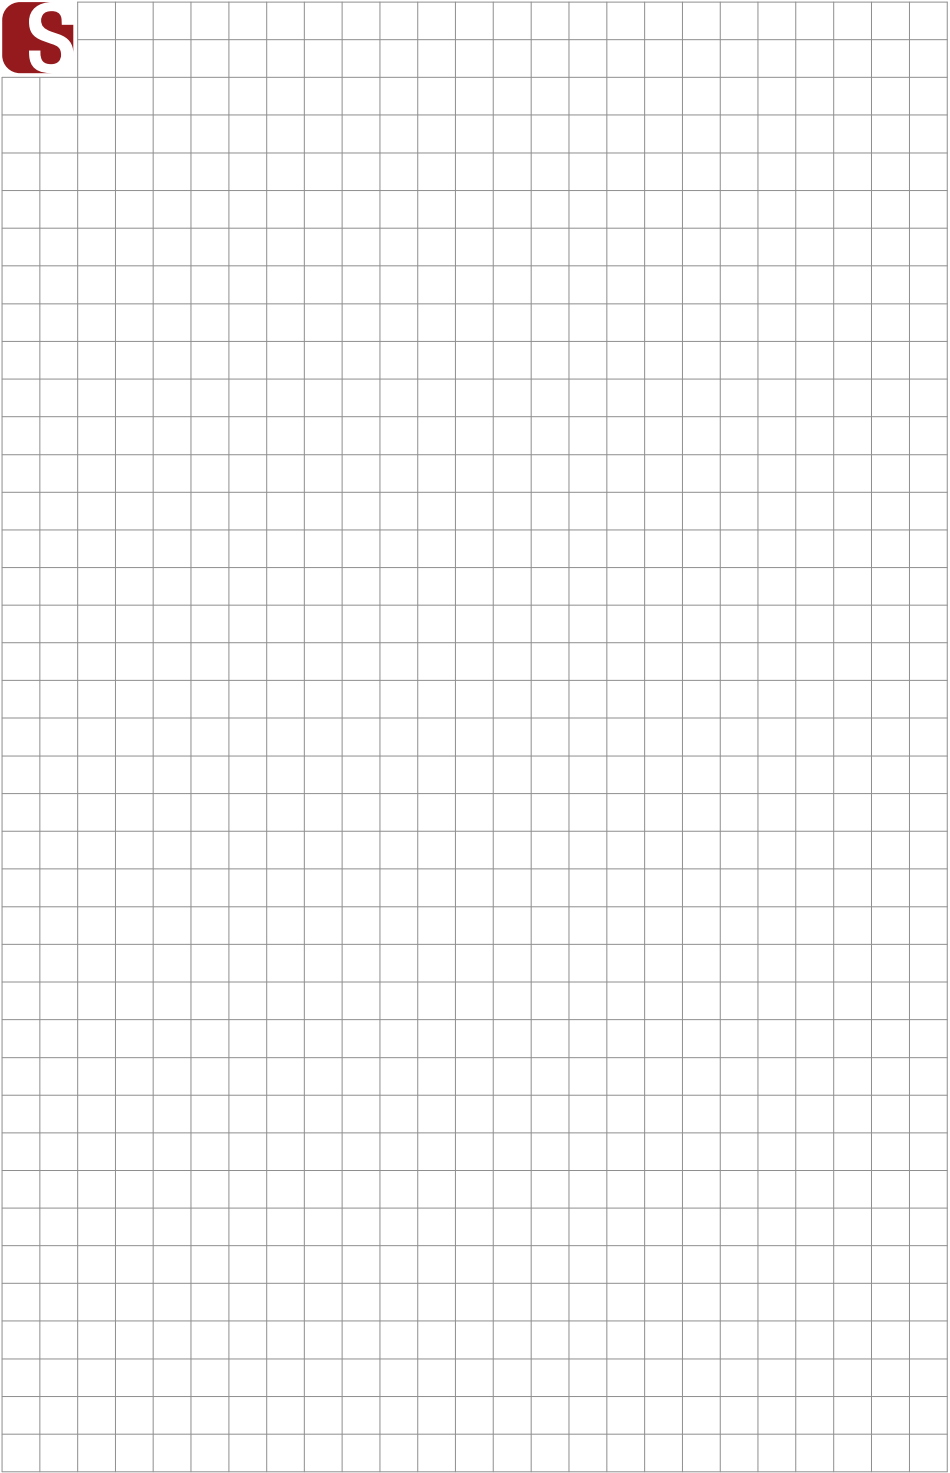

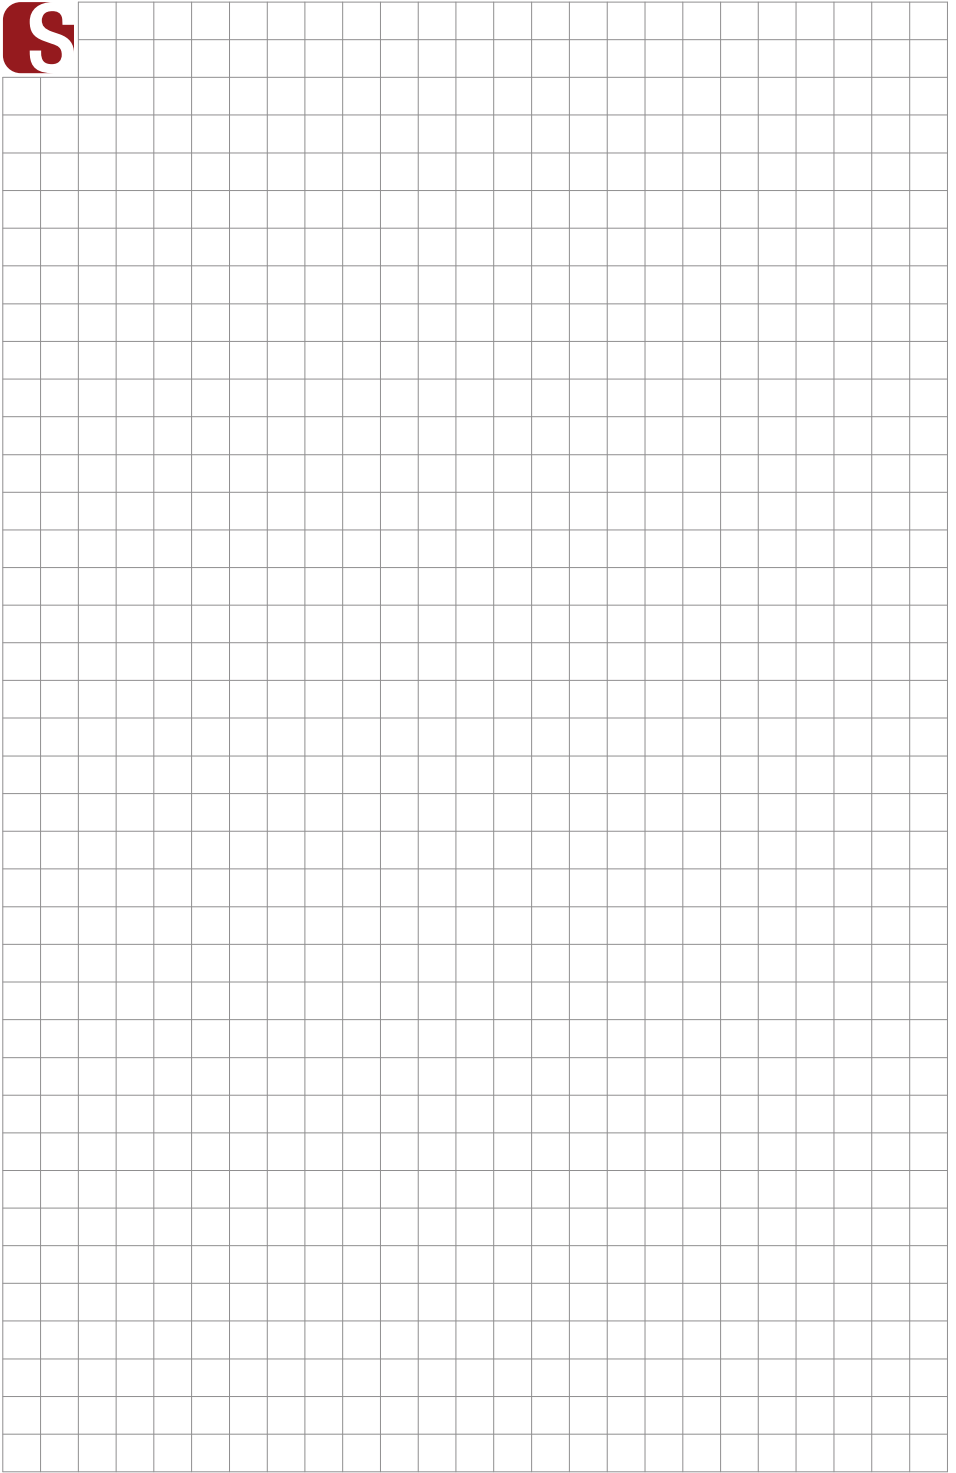

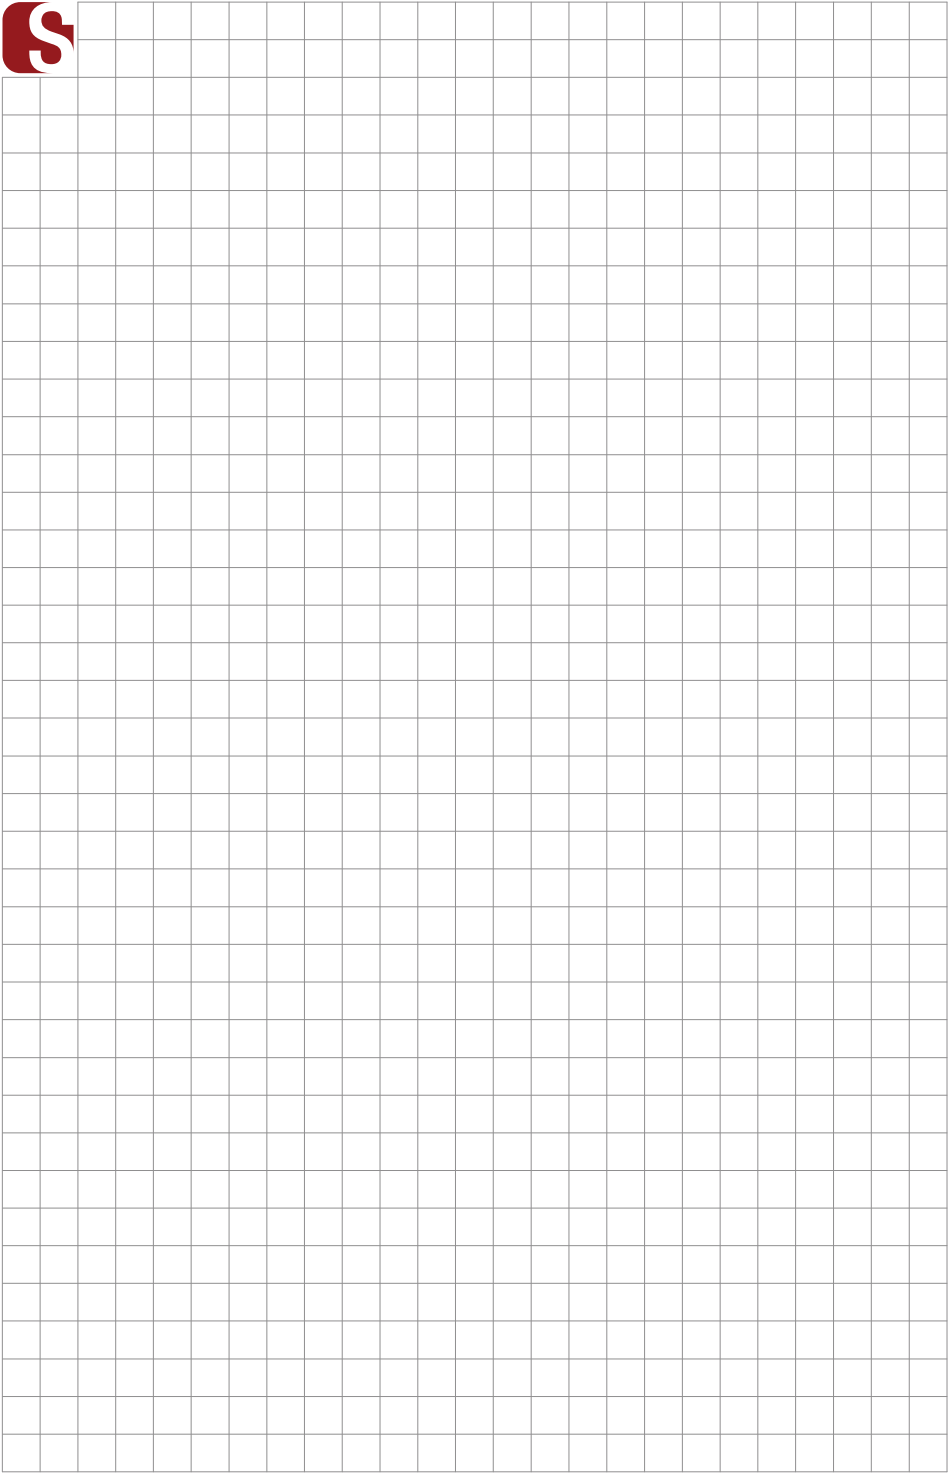





**SLIGHT®**

Chemin de la Veyre d'en haut D2

1806 St-Légier — Switzerland

+41 21 925 38 88

[www.slight.ch](http://www.slight.ch)

[info@slight.ch](mailto:info@slight.ch)